

TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET-RG59, ET-ET-RG62, ET-RG71, .480 inch D Hole



RF Connectors Technical Data Sheet ET11726

Configuration

- TNC Female Connector
- MIL-STD-348
- 50 Ohms
- Straight Body Geometry

Features

Silver Plated Contact

Clamp/Solder Attachment

• ET-RG59, ET-RG62, ET-RG71 Interface Type

- Bulkhead
- Contact plating according to QQ-S-365

Applications

General Purpose Test

- Rack and Panel Mount Applications
- Custom Cable Assemblies

Description

Ebeestock's ET11726 TNC female bulkhead connector with clamp/solder attachment for ET-RG59, ET-RG62 and ET-RG71 (.480 inch D hole) is part of our full line of RF components available for same-day shipping. This TNC bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our TNC female bulkhead connector ET11726 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Operating Voltage (AC)			500	Vrms
Insulation Resistance	5,000			MOhms

Mechanical Specifications

Size


Length 1.15 in [29.21 mm] Width/Dia. 0.688 in [17.48 mm] Weight 0.044 lbs [19.96 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET-RG59, ET-RG62, ET-RG71,

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen, 523900, Dongguan, Guangdong, China.



TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET-RG59, ET-ET-RG62, ET-RG71, .480 inch D Hole

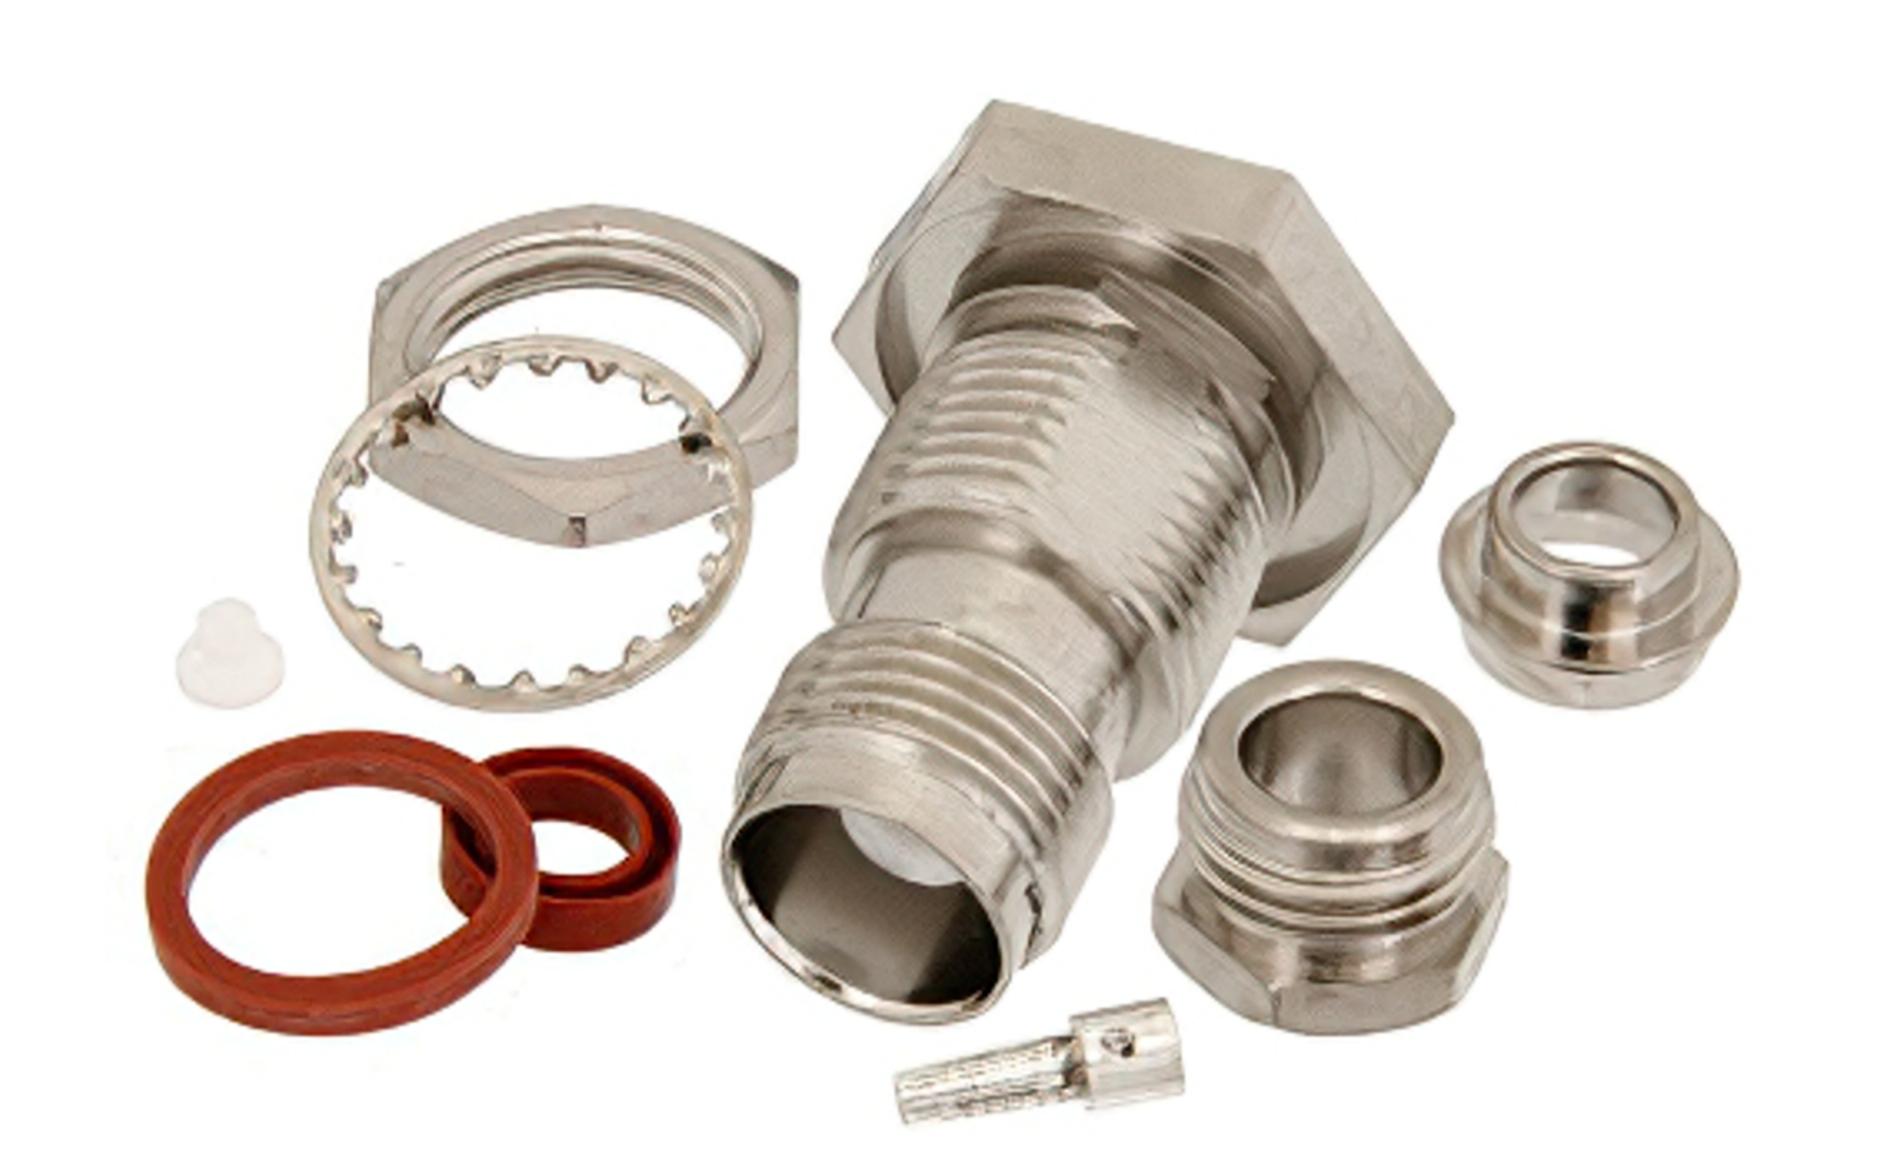



TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET-RG59, ET-ET-RG62, ET-RG71, .480 inch D Hole



RF Connectors Technical Data Sheet ET11726

Material Specifications

Description	Material	Plating
Contact		Silver QQ-S-365
Insulation	PTFE	
Body	Brass	Nickel QQ-N-290

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:


TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET-RG59, ET-RG62, ET-RG71, .480 inch D Hole from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: TNC Female Bulkhead Mount Connector Clamp/Solder Attachment for ET-RG59, ET-RG71, .480 inch D Hole ET11726

URL: https://www.ebeestock.com/tnc-female-bulkhead-mount-connector-clamp-solder-attachment-for-rg59-rg62-rg71-480-inch-d-hole-0011726

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

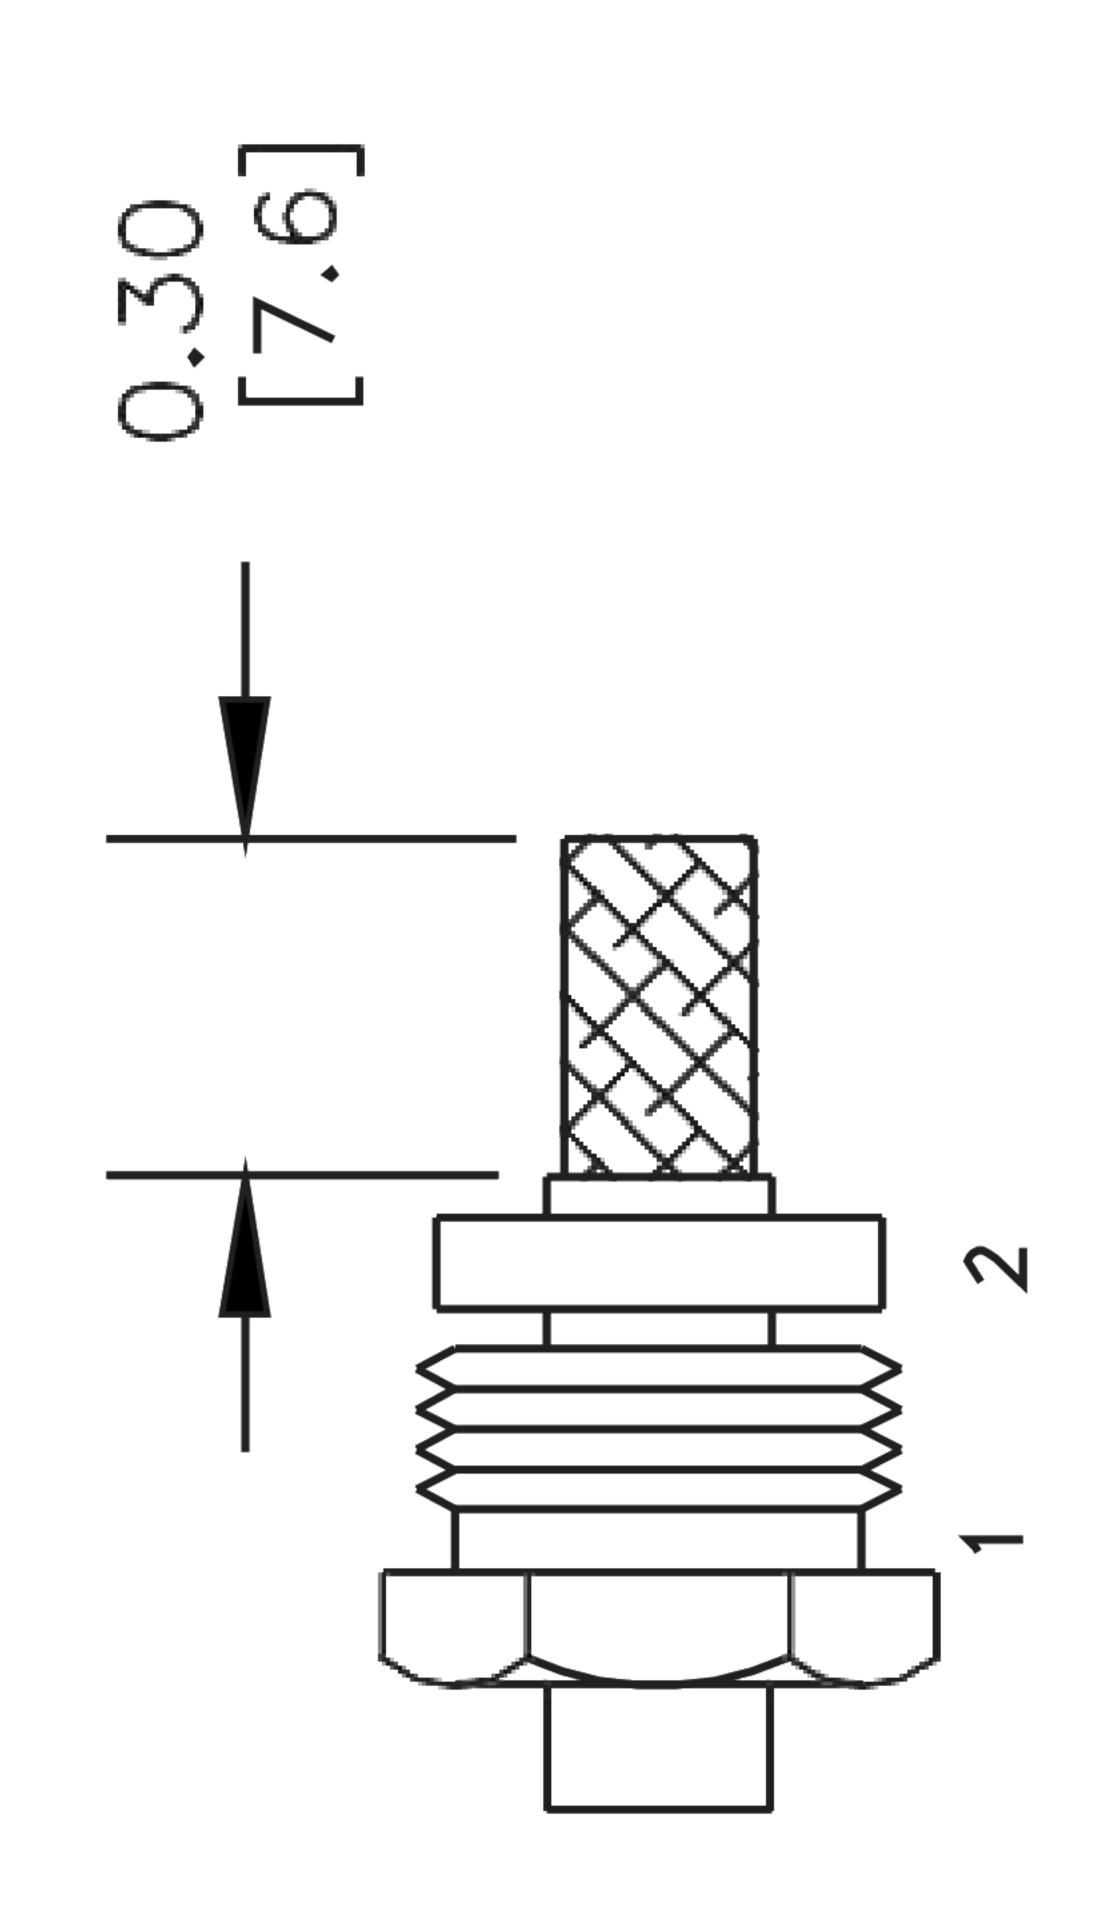

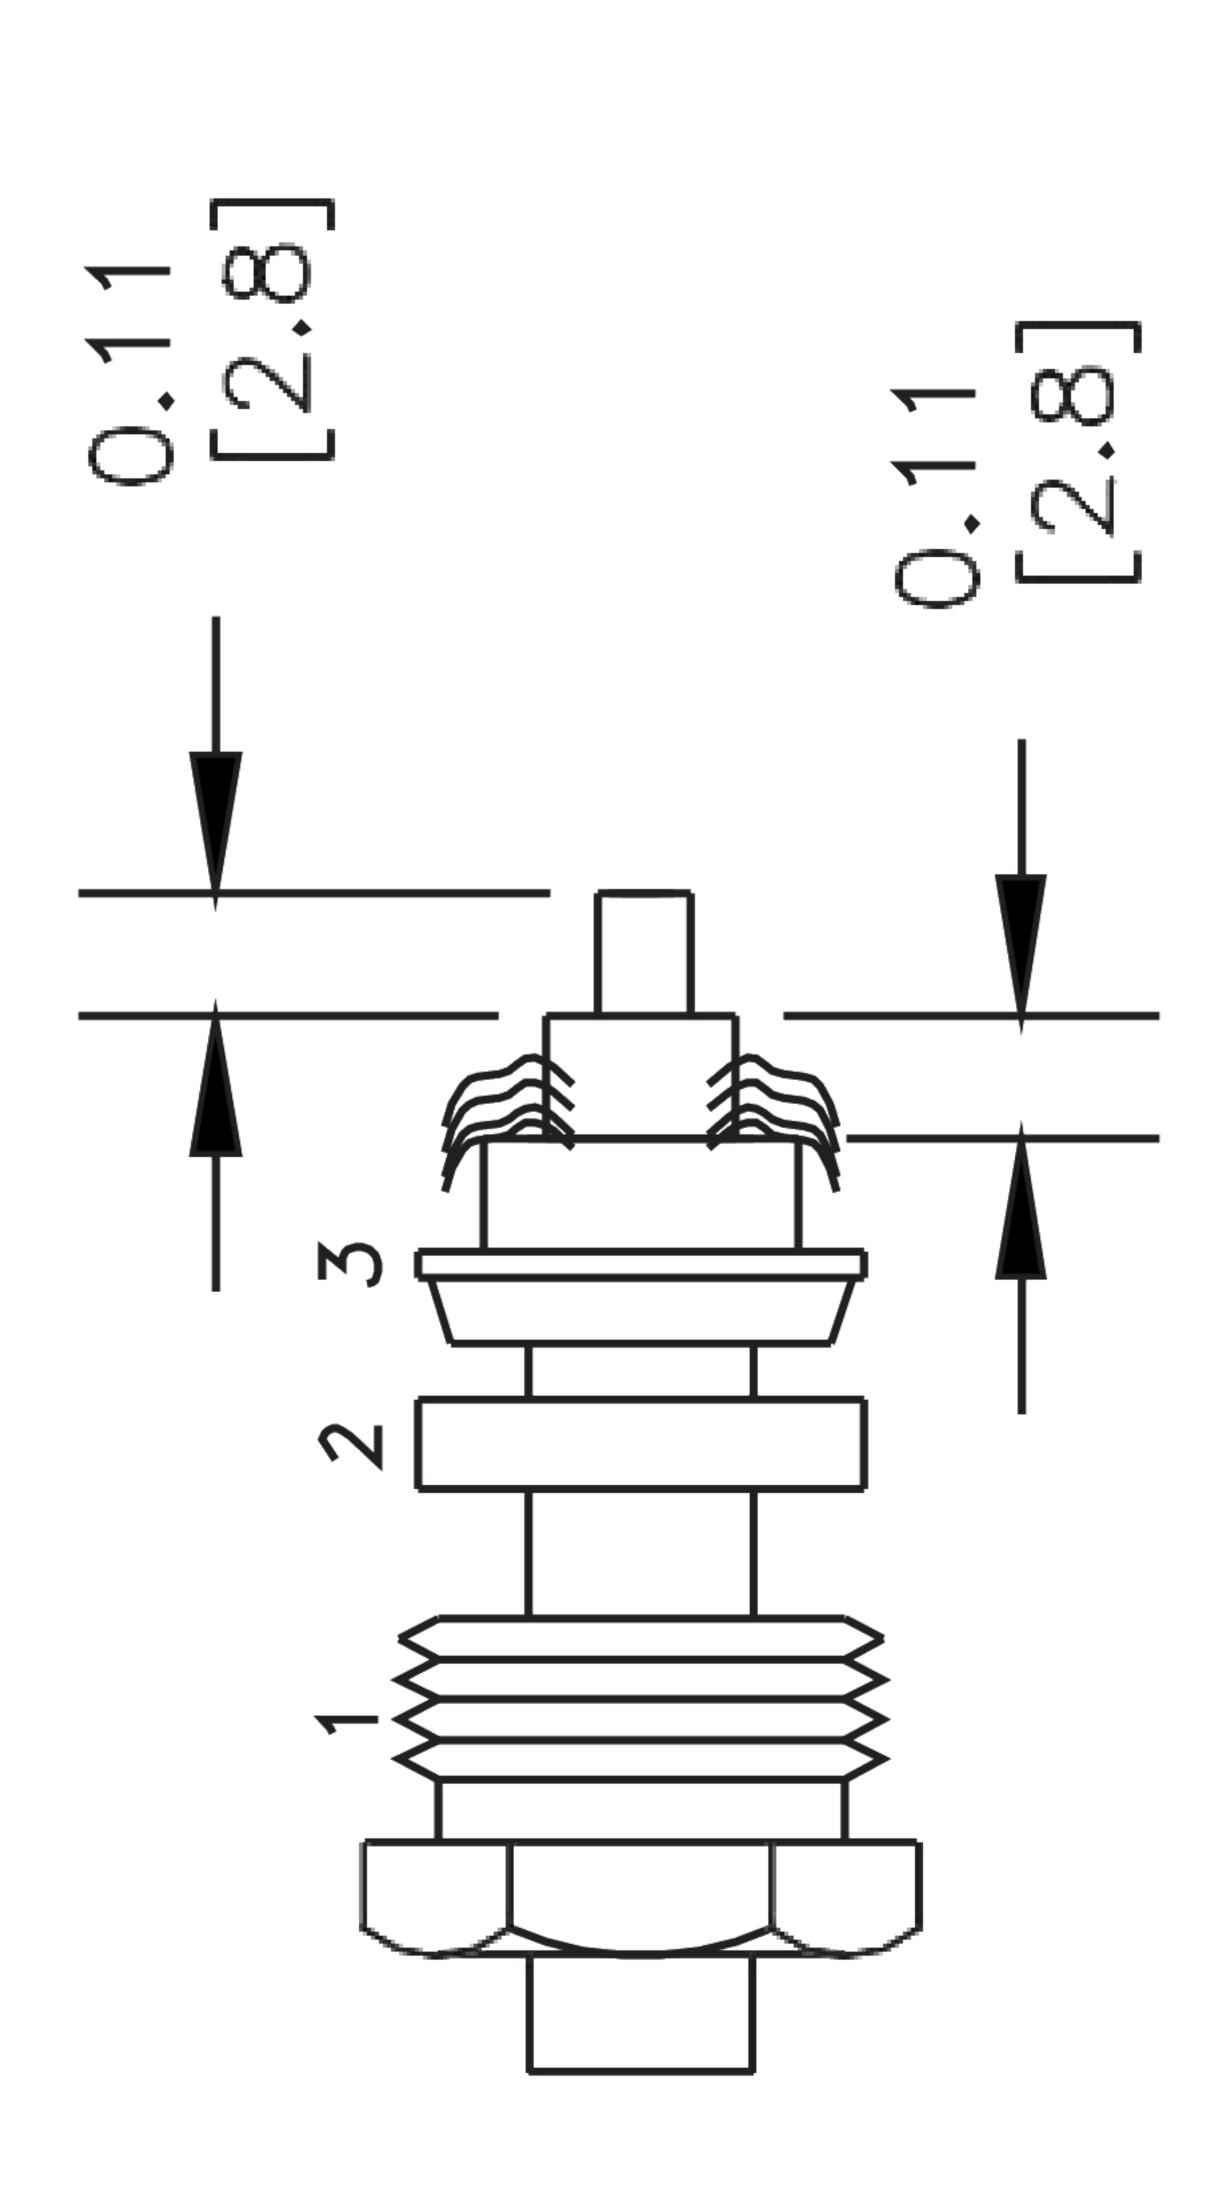



₹ -. ∽. ₩. 4.