

75 Ohm F Male to 75 Ohm PAL Jack Adapter



RF Adapters Technical Data Sheet

ET1230

6

Configuration

- F Male Connector 1
- PAL Jack Connector 2

- 75 Ohms
- Straight Body Geometry

Features

Gold Plated Brass Contact

• 3 µ-in min Gold Contact Plating

Applications

• Allows Connection Between Series

General Purpose Test

Description

Ebeestock's ET12306 75 ohm type F male to PAL jack adapter is part of our full line of RF components available for same-day shipping. Our type F to PAL adapter has a male to jack gender configuration.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Mechanical Specifications

Size				
Length	1.22 in [30.9	9 mm]		
Width	0.472 in [11.99 mm]			
Weight	0.034 lbs [15.42 g]			
Type	F Male	PAL Jack		
Polarity	Standard	Standard		
Hex Size	7/16 in.			
Mating Torque	15 in-lbs [1.70 Nm] max			


Material Specifications						
	Connector 1		Connector 2			
Туре	F Male		PAL Jack			
Contact	Brass	Gold	Brass	Gold		
		3 μ-in minimum		3 μ-in minimum		
Insulation	PTFE		PTFE			

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Ohm F Male to PAL Jack Adapter ET12306

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



75 Ohm F Male to 75 Ohm PAL Jack Adapter

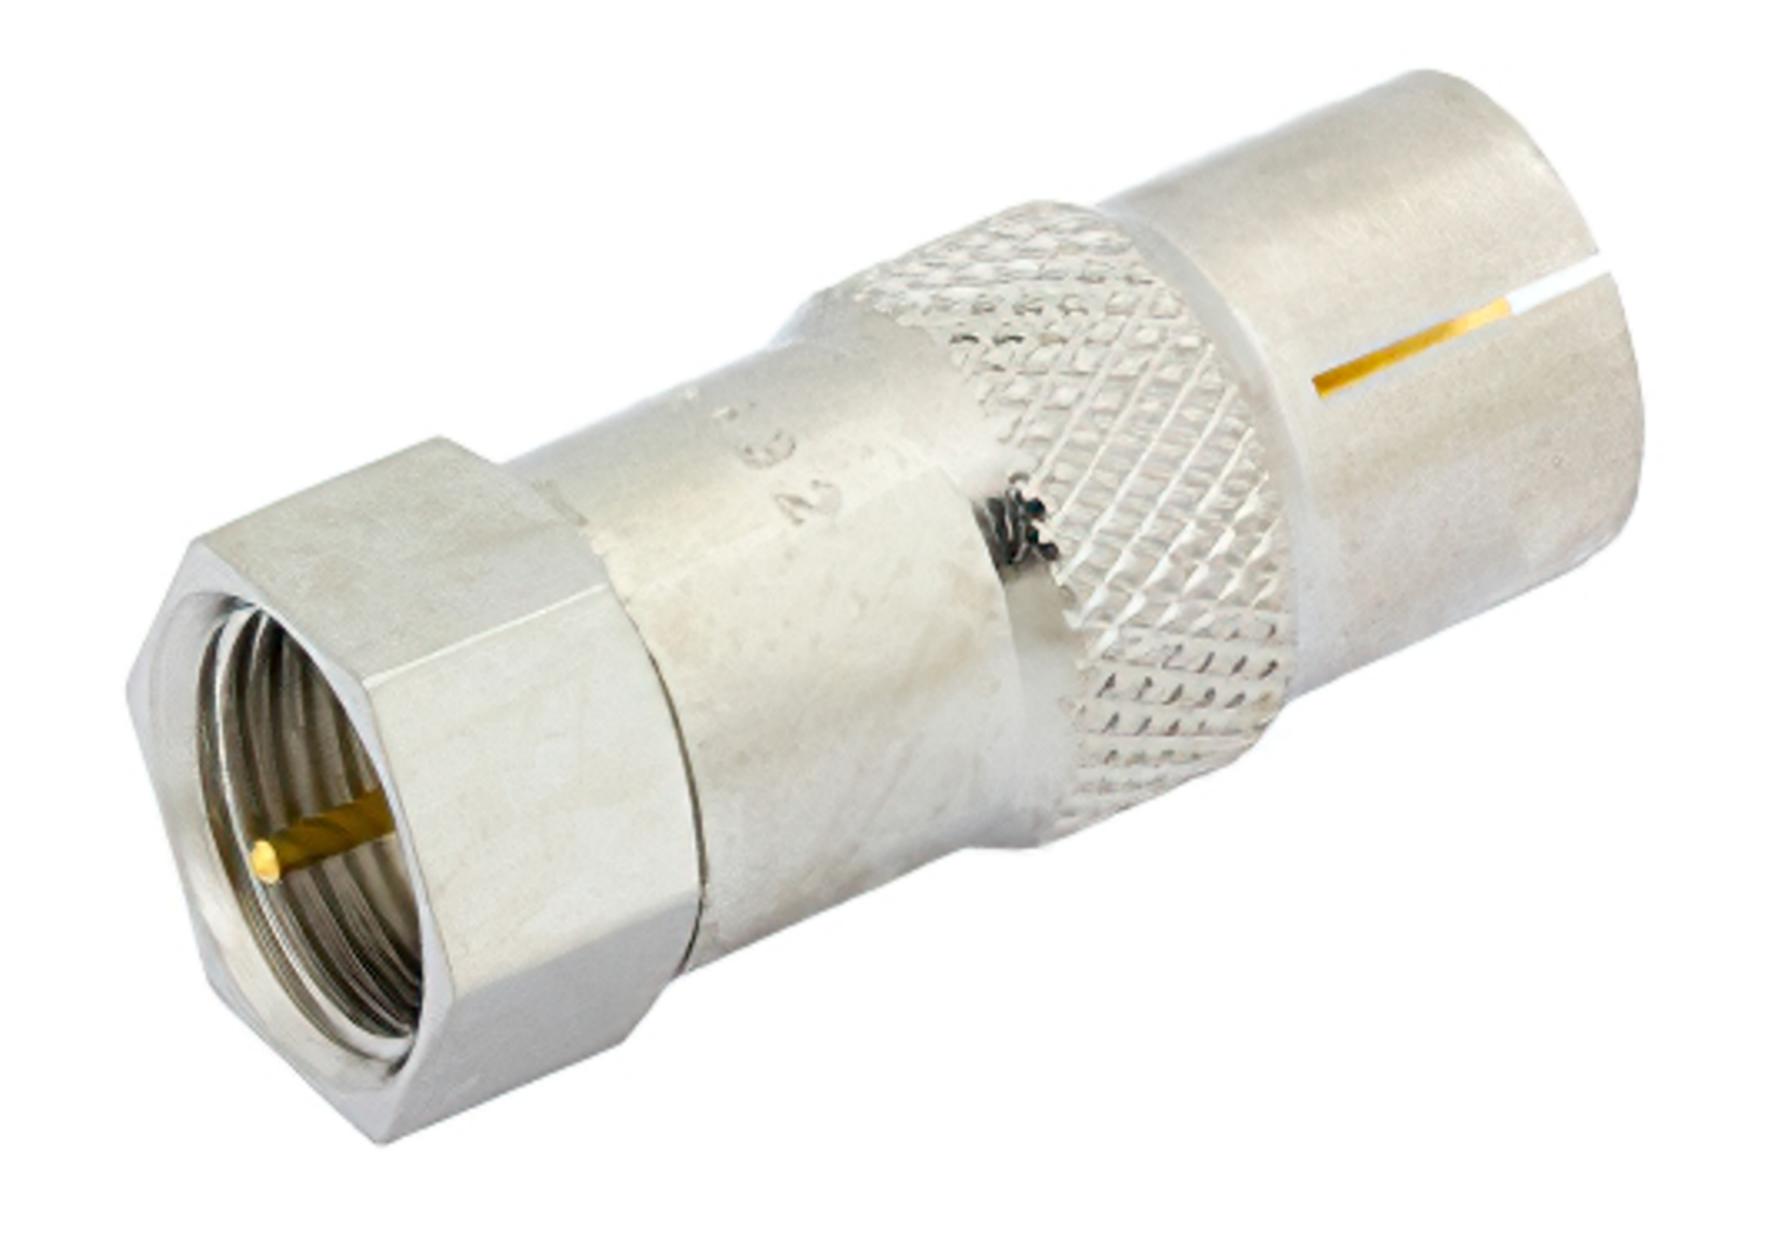

RF Adapters Technical Data Sheet ET12306

Outer Conductor			Brass	Nickel
				100 μ-in minimum
Body	Brass	Nickel		
		100 μ-in minimum		
Coupling Nut	Brass	Nickel		
		100 μ-in minimum		

Compliance Certifications (see product page for current document)

75 Ohm F Male to PAL Jack Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Ohm F Male to PAL Jack Adapter ET12306

URL: https://www.ebeestock.com/75-ohm-f-male-to-75-ohm-pal-jack-adapter-0012306

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12306 CAD Drawing 75 Ohm F Male to PAL Jack Adapter

