


N Male to MCX Jack Adapter

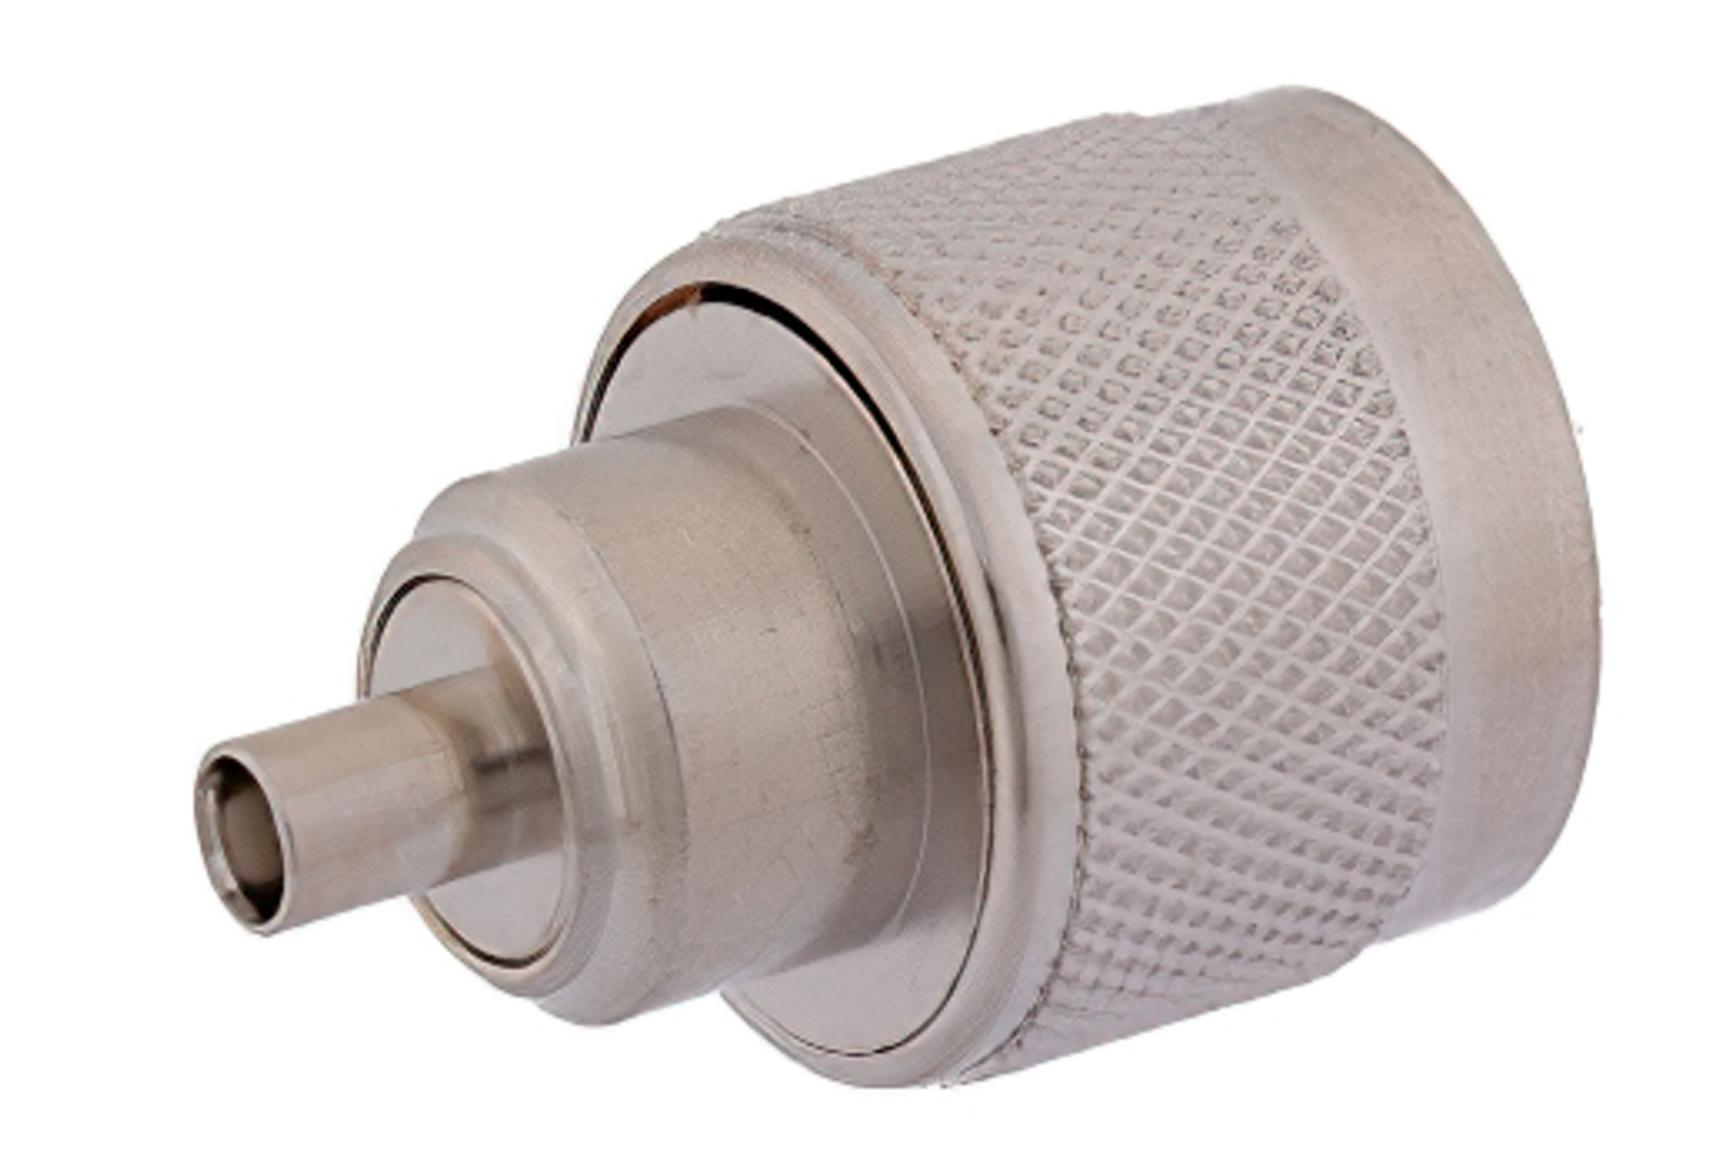

RF Adapters Technical Data Sheet

ET1238

6

Configuration

- N Male Connector 1
- MCX Jack Connector 2

Features

- Type N interface compliant with MIL-STD-348
- MCX interface compliant with MIL-C-39012
- Contact plating according to MIL-G-45204
- N Interface compliant with MIL-STD-348

- 50 Ohm
- Straight Body Geometry
- MCX Interface compliant with MIL-C-39012
- Gold Plated Contact
- Contact Plating per MIL-G-45204

Applications

- Allows Connection Between Series
- General Purpose Test
- Allows Connection Between Series
- General Purpose Test

Description

Ebeestock's ET12386 type N male to MCX jack adapter is part of our full line of RF components available for same-day shipping. Our type N to MCX adapter has a male to jack gender configuration. ET12386 type N male to MCX jack adapter operates to 6 GHz.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications			
Erequency Range	DC	6	GHz
Operating Voltage (AC)		335	Vrms
Dielectric Withstanding Voltage (AC)		1,000	Vrms
Insulation Resistance	1,000		MOhms

Mechanical Specifications

Size


Length
Width
Use of the second of the second

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to MCX Jack Adapter ET12386

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



N Male to MCX Jack Adapter

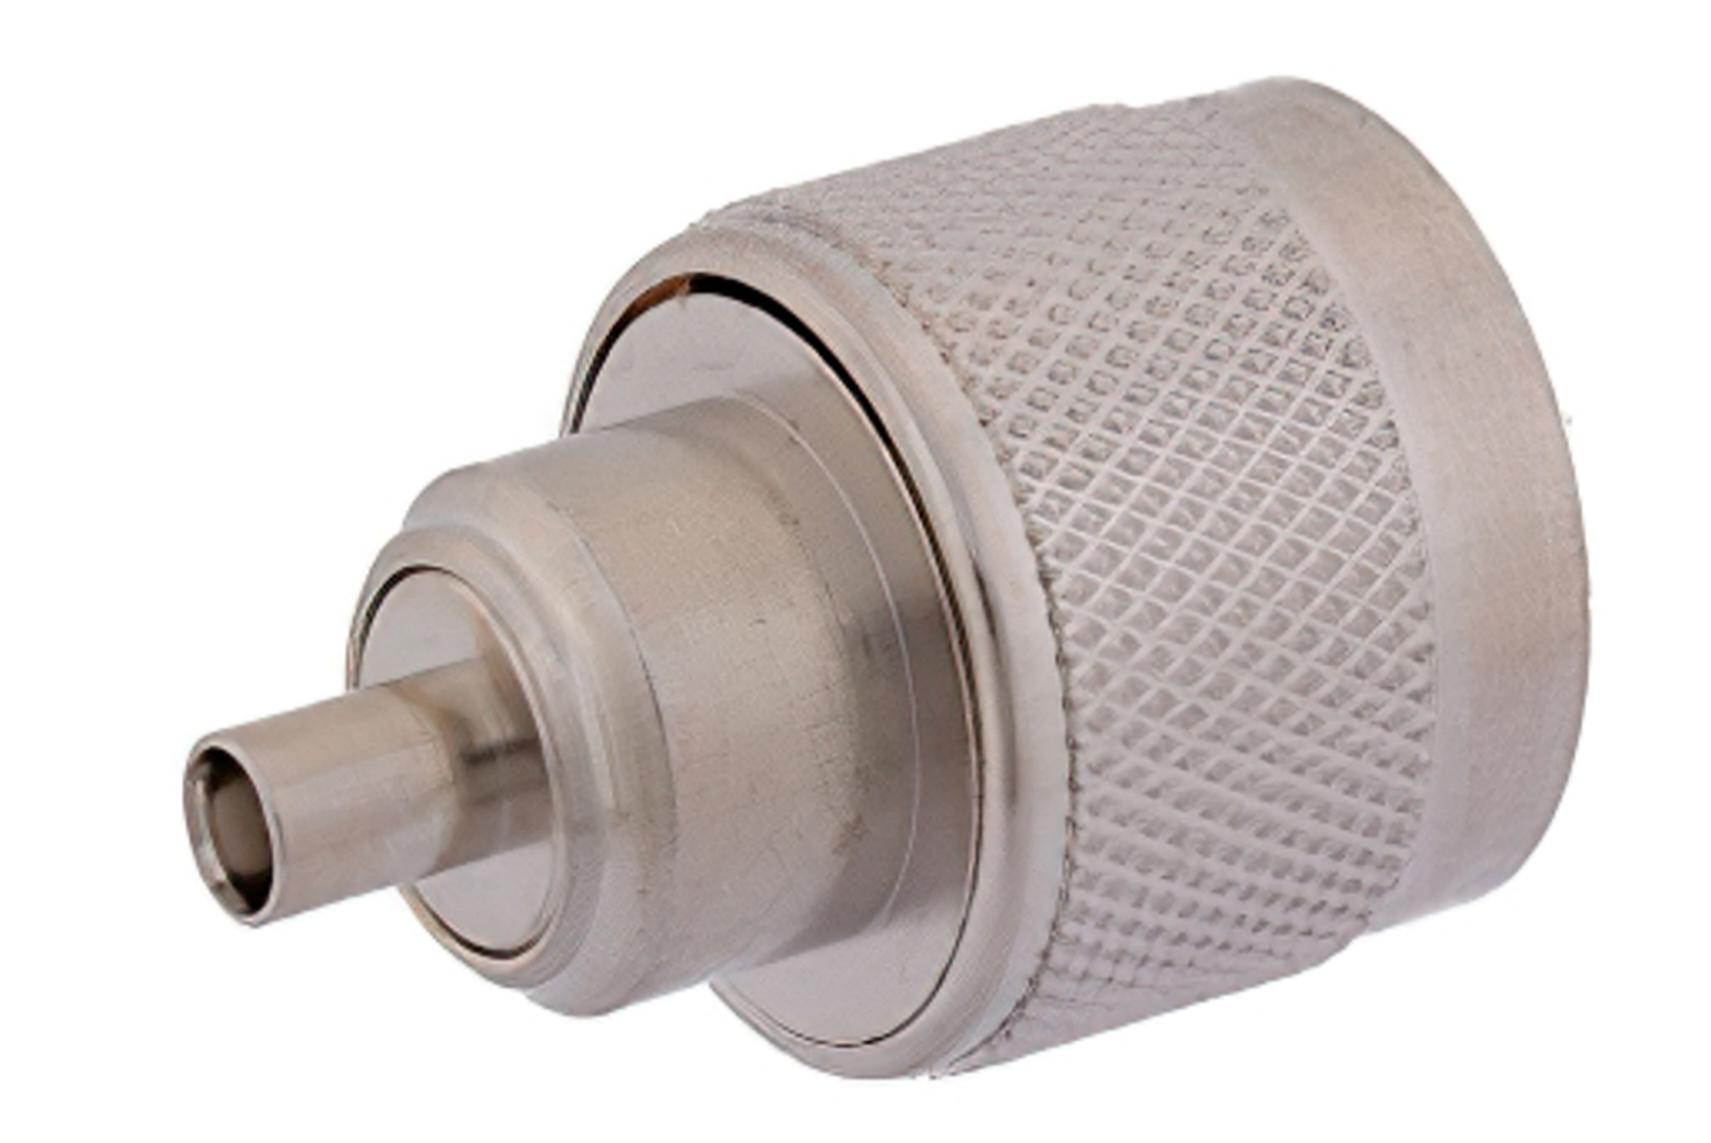

RF Adapters Technical Data Sheet ET12386

Description	Connector 1	Connector 2
Type	N Male	MCX Jack
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-C-39012

Material Specifications

	Conn	ector 1	Conn	ector 2
Description	Material	Plating	Material	Plating
Туре	N Male		MCX Jack	
Contact		Gold		Gold
		MIL-G-45204		MIL-G-45204
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel
				QQ-N-290
Body	Brass	Nickel		
		QQ-N-290		
Coupling Nut	Brass	Nickel		
		QQ-N-290		

Environmental SpecificationsTemperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to MCX Jack Adapter ET12386



N Male to MCX Jack Adapter



RF Adapters Technical Data Sheet ET12386

N Male to MCX Jack Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Male to MCX Jack Adapter ET12386

URL: https://www.ebeestock.com/n-male-to-mcx-jack-adapter-0012386

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12386 CAD Drawing N Male to MCX Jack Adapter

