

SMP Male Bulkhead Mount Limited Detent Connector Solder Atta chment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, 4.83 mm Diameter



# RF Connectors Technical Data Sheet

ET11505

### Configuration

- Limited Detent SMP Male Connector
- MIL-STD-348A
- 50 Ohms
- Straight Body Geometry

- Connector Interface Types: ET-RG405, ET-RG405 Tinned, ET38322, ET38321, ET38323, ET-SR405TN
- Bulkhead

#### Features

- Max. Operating Frequency 26.5 GHz
- Good VSWR of 1.29:1

- Gold Plated Brass Contact
- Blind Mate Connector

## Applications

General Purpose Test

- Rack and Panel Mount Applications
- Custom Cable Assemblies

#### Description

Ebeestock's ET11505 SMP male limited detent bulkhead connector with solder/solder attachment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, ET38323 and ET38340 (4.83 mm diameter) is part of our full line of RF components available for same-day shipping. Our SMP male connector operates up to a maximum frequency of 26.5 GHz and offers good VSWR of 1.29:1. The Ebeestock blind mate connector is ideal for applications where direct visual or tactile access to the connection point is not possible, for example, when two circuit boards need to be mated. This SMP bulkhead connector allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Our SMP male bulkhead connector ET11505 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
VSWR			1.29:1	
Operating Voltage (AC)			335	Vrms
Test Voltage (AC)			500	Vrms
Inner Conductor DC Resistance			6	mOhms
Outer Conductor DC Resistance			2	mOhms
Insulation Resistance	5,000			MOhms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Male Bulkhead Mount Limited Detent Connector Solder Attachment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, 4.83 mm Diameter ET11505

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMP Male Bulkhead Mount Limited Detent Connector Solder Atta chment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, 4.83 mm Diameter



# RF Connectors Technical Data Sheet

ET11505

#### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 4	4 to 12	12 to 26.5			GHz
VSWR, Max	1.07:1	1.23:1	1.29:1			

Electrical Specification Notes:

Insertion loss =  $0.05 \times \text{sqrt(fGHz)} \text{ dB max up to } 12 \text{ GHz}.$ 

### Mechanical Specifications

Size

 Length
 0.39 in [9.91 mm]

 Width/Dia.
 0.25 in [6.35 mm]

 Weight
 0.005 lbs [2.27 g]

 Mating Cycles
 500 Cycles

#### Material Specifications

Description	Material	Plating
Contact	Brass	Gold
Insulation	PTFE	
Body	Brass	Gold

#### **Environmental Specifications**

Temperature

Operating Range -65 to +155 deg C

Humidity MIL-STD-202, Method 106

Shock
MIL-STD-202, Method 213, Condition A
Vibration
MIL-STD-202, Method 204, Condition B
Thermal Shock
MIL-STD-202, Method 107, Condition B

Compliance Certifications (see product page for current document)

#### Plotted and Other Data


Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Male Bulkhead Mount Limited Detent Connector Solder Attachment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, 4.83 mm Diameter ET11505

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



SMP Male Bulkhead Mount Limited Detent Connector Solder Atta chment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, 4.83 mm Diameter

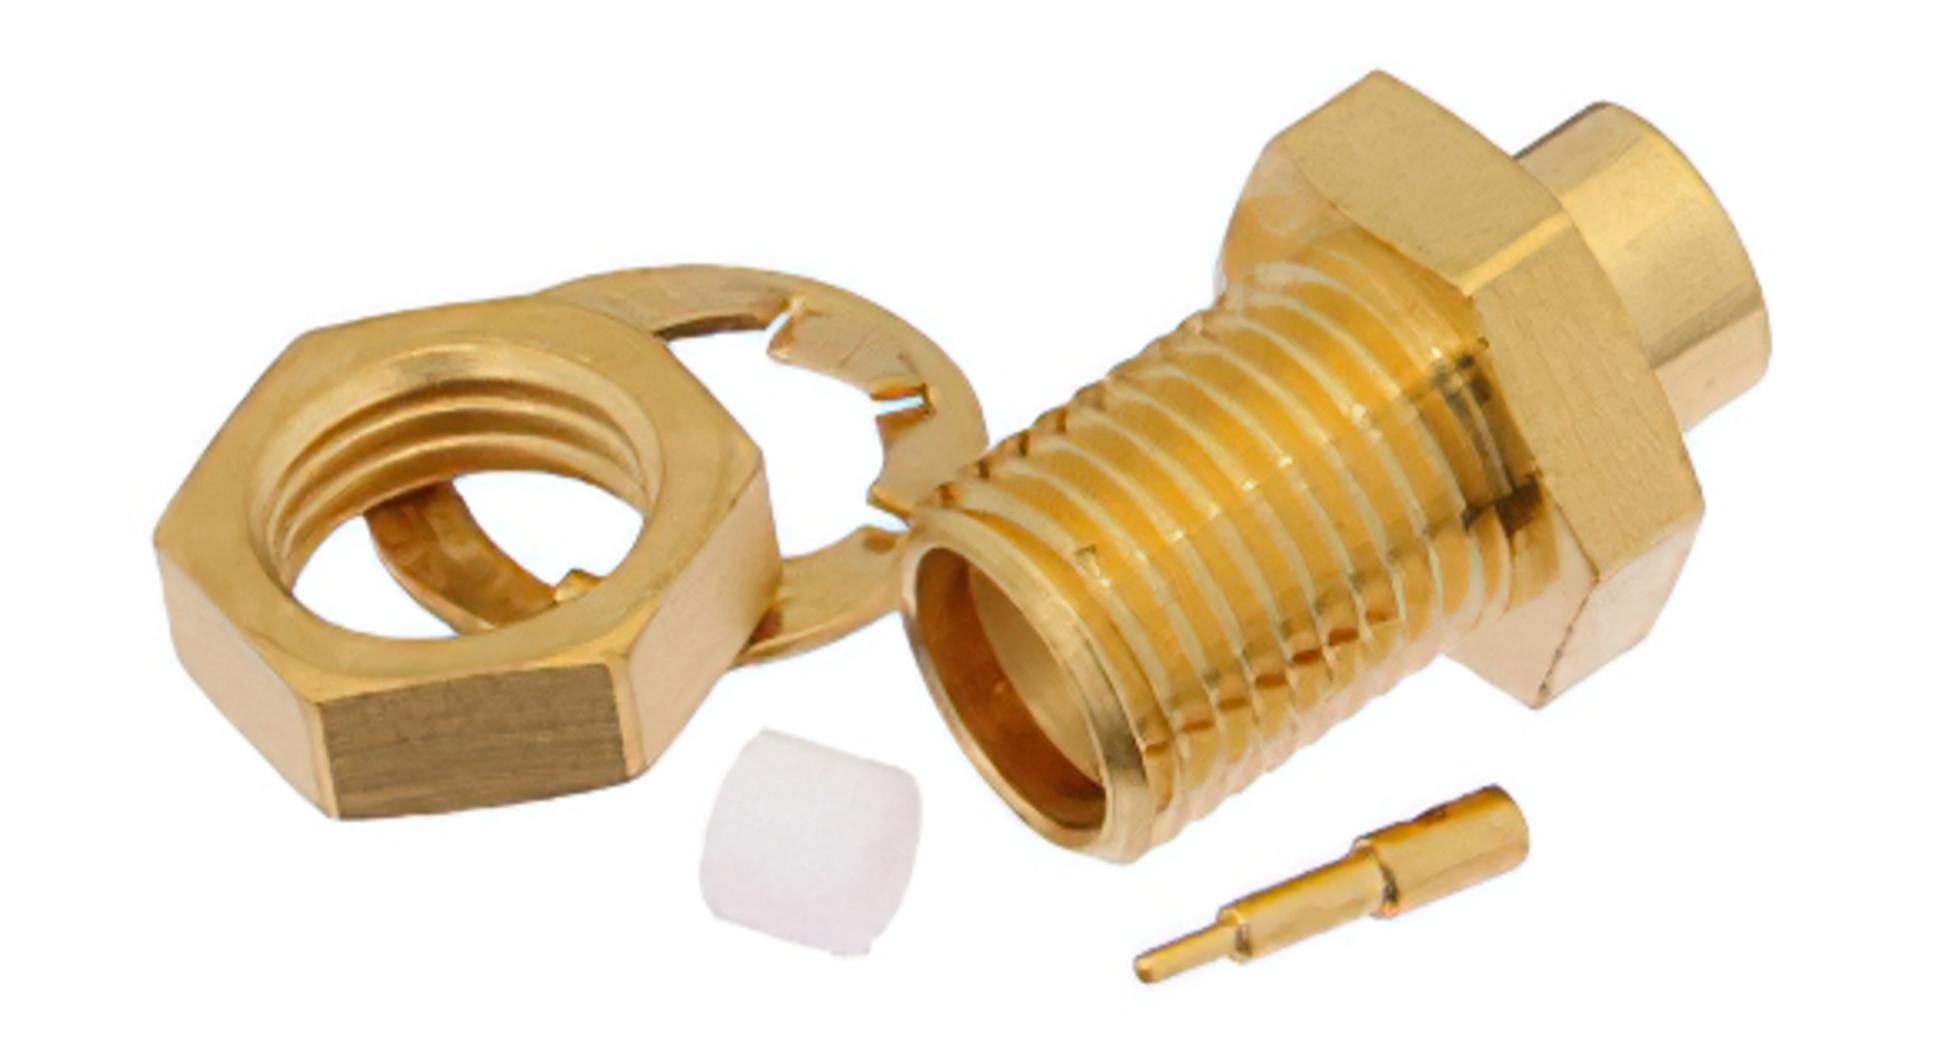

# RF Connectors Technical Data Sheet

ET11505

SMP Male Bulkhead Mount Limited Detent Connector Solder Attachment for ET-RG405, ET-RG405 Tinned, ET38322, ET-SR405AL, 4.83 mm Diameter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMP Male Bulkhead Mount Limited Detent Connector Solder Attachment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, 4.83 mm Diameter ET11505

**URL:** https://www.ebeestock.com/smp-male-bulkhead-mount-limited-detent-connector-solder-attachme nt-for-rg405-rg405-tinned-pe-sr405fl-pe-sr405al-4-83-mm-diameter-0011505

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

# ET11505 CAD Drawing

SMP Male Bulkhead Mount Limited Detent Connector Solder Attachment for ET-RG405, ET-RG405 Tinned, ET38322, ET38321, 4.83 mm Diameter

