

RP TNC Male Connector Crimp/Solder Attachment for ET38331, E T38330, ET38329, ET38378, ET38378-DB, ET38378-UF, 0.400 inch



RF Connectors Technical Data Sheet

ET11734

Configuration

- TNC Male Reverse Polarity Connector
- 50 Ohms
- Straight Body Geometry

- ET38331, ET38330, ET38329, ET38378, ET38378-DB, ET38375, 0.400 inch Interface Type
- Crimp/Solder Attachment

Features

- Max. Operating Frequency 11 GHz
- Gold Plated Phosphor Bronze Contact

Reverse Polarity

Applications

General Purpose Test

Custom Cable Assemblies

Description

Ebeestock's ET11734 RP TNC male connector with crimp/solder attachment for ET38331, ET38330, ET38329, ET38378, ET38376, ET38375 and 0.400 inch is part of our full line of RF components available for same-day shipping. The male reverse polarity configuration uses a male connector body with a female inner contact receptacle. Our TNC male connector operates up to a maximum frequency of 11 GHz.

Our reverse polarity TNC male connector ET11734 datasheet specifications and drawing with dimensions are shown below in this PDF. Ebeestock's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Ebeestock has the right connector for the job. Ebeestock can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		11	GHz

Mechanical Specifications

 Length
 1.75 in [44.45 mm]

 Width/Dia.
 0.59 in [14.99 mm]

 Weight
 0.058 lbs [26.31 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: RP TNC Male Connector Crimp/Solder Attachment for ET38331, ET38330, ET38329, LMR-400, ET38376, ET38375, 0.400 inch ET11734

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



RP TNC Male Connector Crimp/Solder Attachment for ET38331, E T38330, ET38329, ET38378, ET38378-DB, ET38378-UF, 0.400 inch



RF Connectors Technical Data Sheet

ET11734

Material Specifications

Description	Material	Plating
Contact	Phosphor Bronze	Gold
Insulation	PTFE	
Body	Brass	Nickel
Coupling Nut	Brass	Nickel

Environmental Specifications

Temperature

Operating Range

-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data


Notes:

RP TNC Male Connector Crimp/Solder Attachment for ET38331, ET38330, ET38329, ET38378, ET38376, ET38375, 0.400 inch from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: RP TNC Male Connector Crimp/Solder Attachment for ET38331, ET38330, ET38329, ET38378, ET38376, ET38375, 0.400 inch ET11734

URL: https://www.ebeestock.com/rp-tnc-male-connector-crimp-solder-attachment-for-pe-c400-pe-b40 0-pe-b405-lmr-400-lmr-400-db-lmr-400-uf-0-400-inch-0011734

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

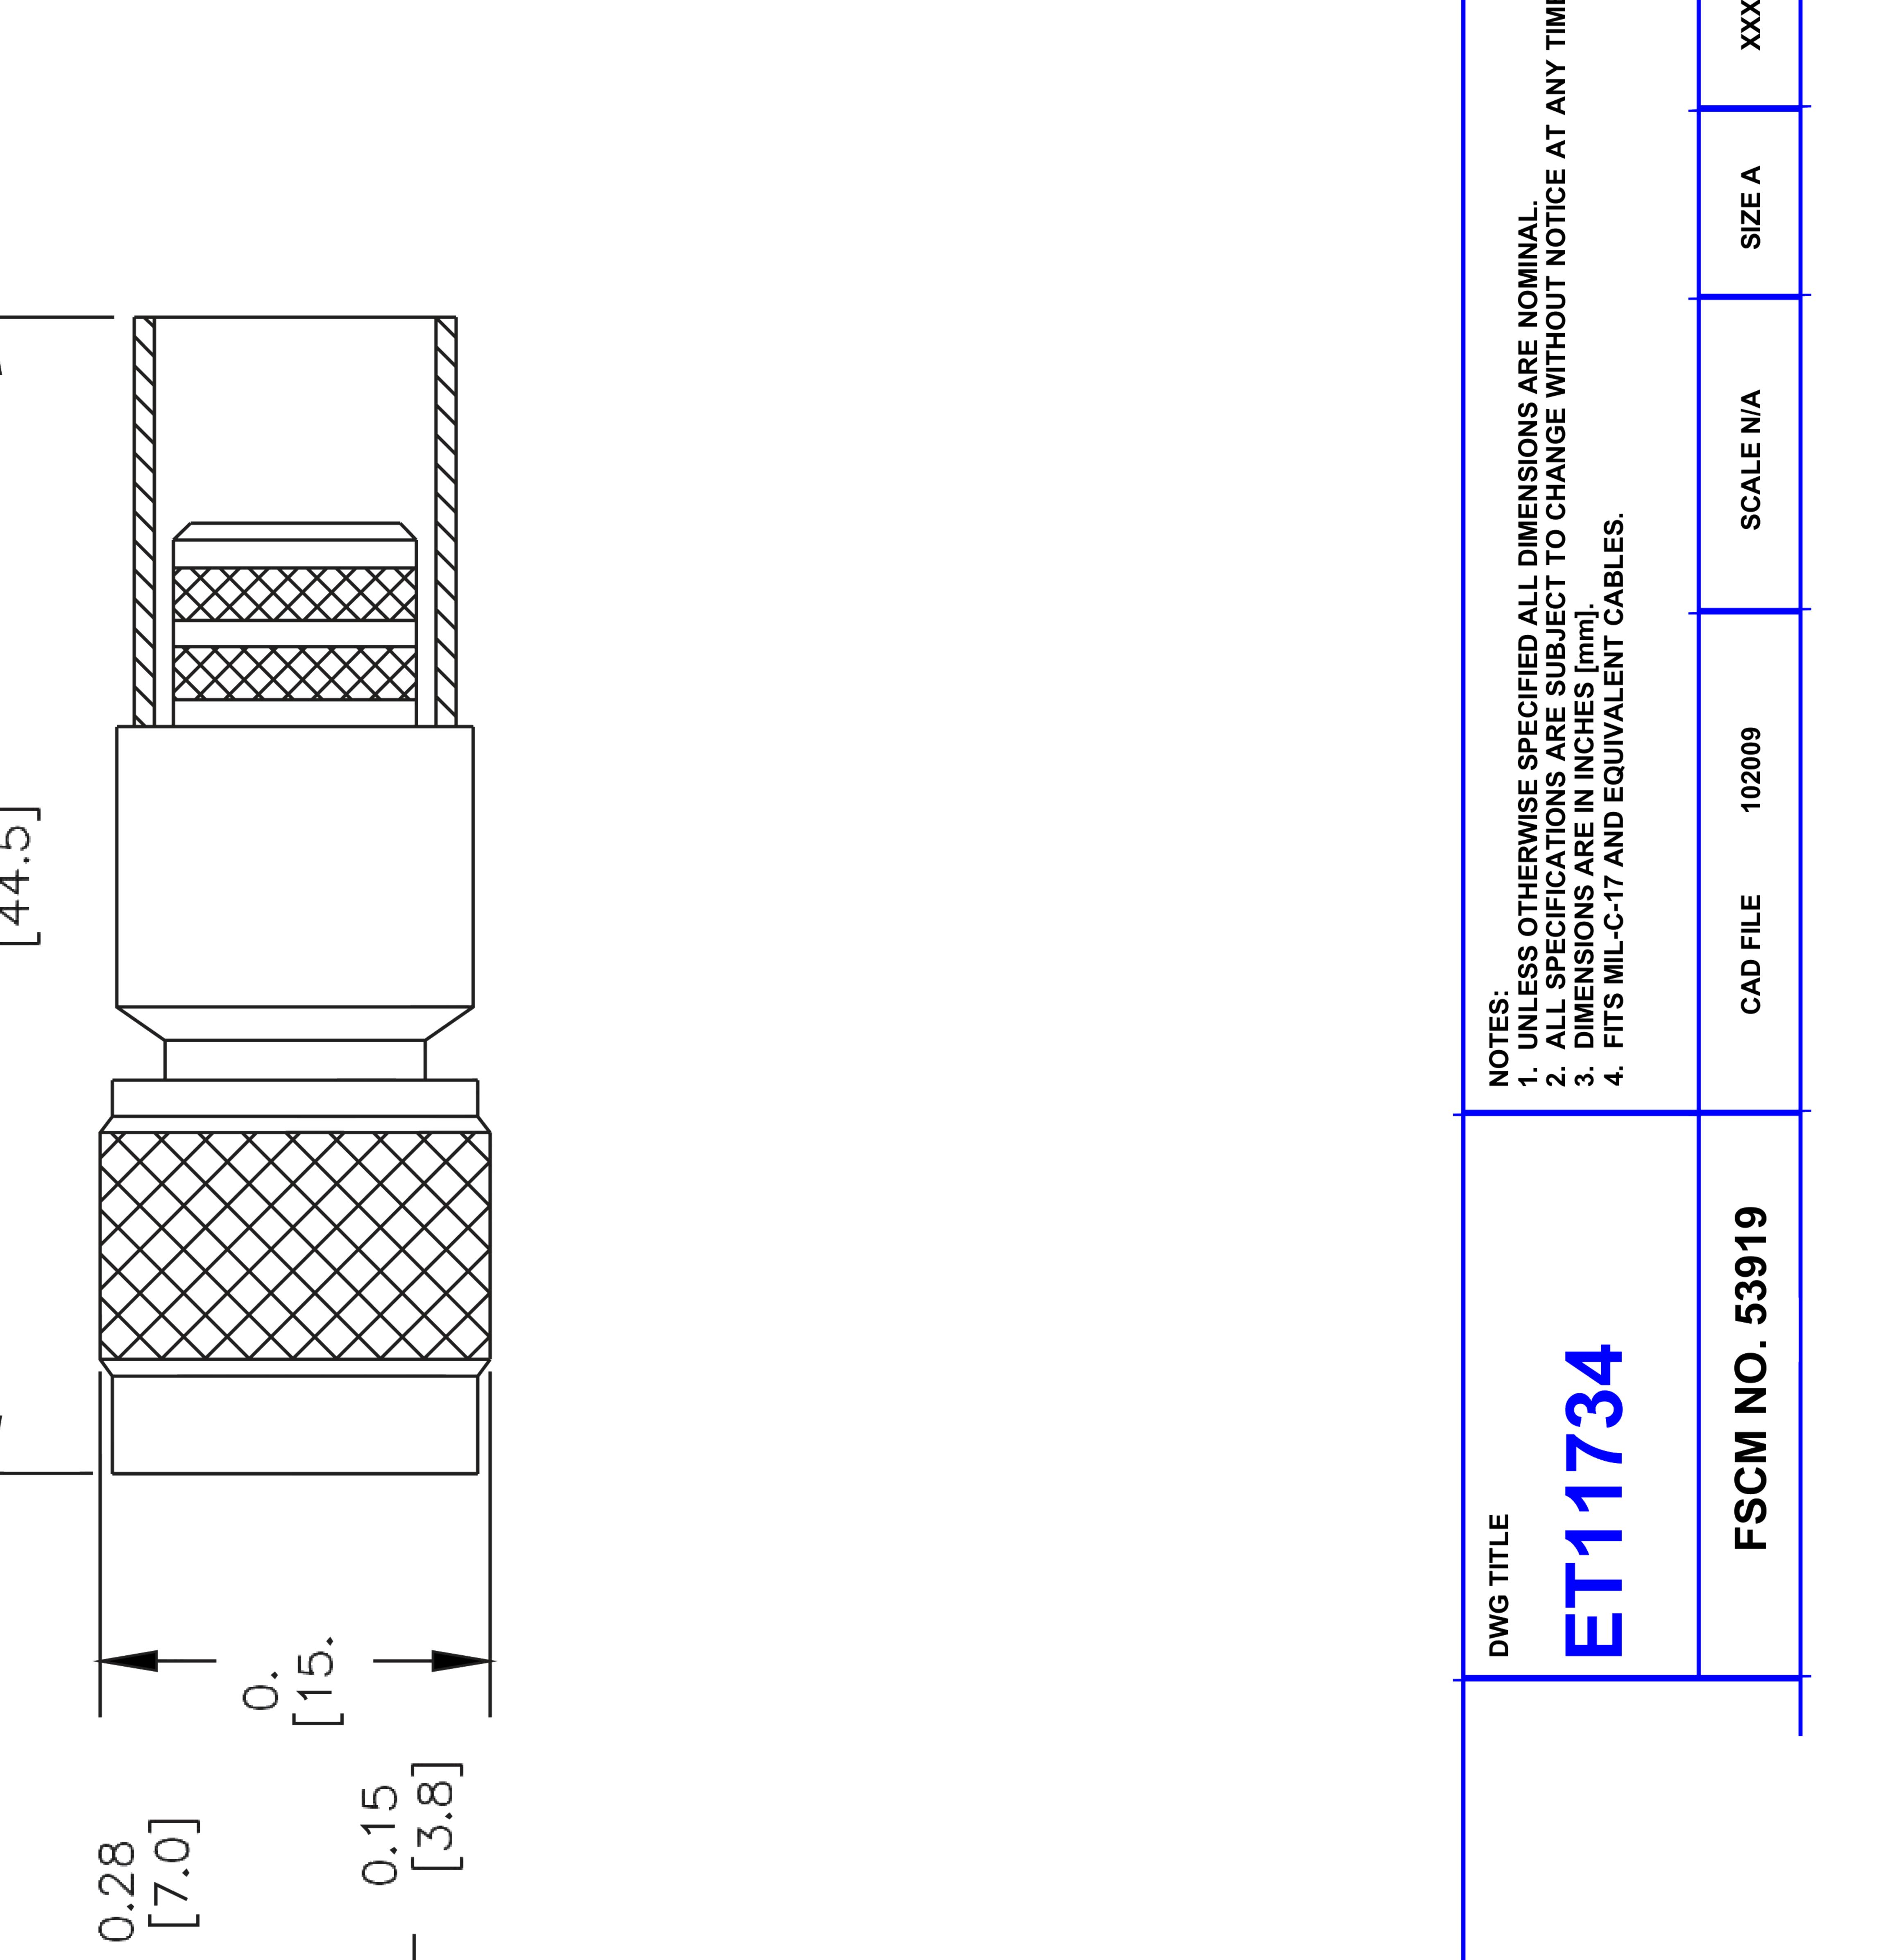

CRIMP SIZE REQUIRE

CONTACT: SOI DER

FERRILLE: 429" HEX CRIMP TO