

Low PIM 7/16 DIN Male to 4.3-10 Male Adapter



RF Adapters Technical Data Sheet

ET12052

Configuration

- 7/16 DIN Male Connector 1
- 4.3-10 Male Connector 2
- 50 Ohm

- Low PIM Design
- Straight Body Geometry

Features

- Max VSWR of 1.25:1 up to 6 GHz
- PIM levels lower than -160 dBc

Silver Plated Brass Contact

Applications

- Allows Connection Between Series
- General Purpose Test
- Low PIM Applications
- Mobile Communications Systems
- Base Stations
- Distributed Antenna Systems (DAS)
- Small Cells

Feeder Cables

Description

Ebeestock's ET12052 7/16 DIN male to 4.3-10 male adapter is part of our full line of RF components available for same-day shipping. Our 7/16 DIN to 4.3-10 adapter has a male to male gender configuration in a low PIM design. ET12052 7/16 DIN male to 4.3-10 male adapter operates to 6 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.25:1 maximum and passive intermodulation of -160 dBc maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		6	GHz
VSWR			1.25:1	
Passive Intermodulation			-160	dBc
Dielectric Withstanding Voltage (AC)			1,500	Vrms
Insulation Resistance	1,000			MOhms

Electrical Specification Notes: Values at 25° C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Low PIM 7/16 DIN Male to 4.3-10 Male Adapter ET12052

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



Low PIM 7/16 DIN Male to 4.3-10 Male Adapter



RF Adapters Technical Data Sheet

ET12052

Mechanical Specifications

Size

Description	Connector 1	Connector 2
Туре	7/16 DIN Male	4.3-10 Male
Polarity	Standard	Standard
Mating Cycles	500	500
Mating Torque	221 in-lbs [24.97 Nm] min	88.5 in-lbs 10.00 Nm min

Material Specifications

	Connector 1		Conne	ector 2
Description	Material	Plating	Material	Plating
Туре	7/16 DIN Male		4.3-10 Male	
Contact	Brass	Silver	Brass	Silver
Insulation	PTFE		PTFE	
Body	Brass	Tri-Metal	Brass	Tri-Metal
Gasket	Silicone Rubber	Silicone Rubber		
Coupling Nut	Brass	Tri-Metal	Brass	Tri-Metal

Environmental Specifications

Temperature

Operating Range

-40 to +155 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Low PIM 7/16 DIN Male to 4.3-10 Male Adapter ET12052

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



Low PIM 7/16 DIN Male to 4.3-10 Male Adapter



RF Adapters Technical Data Sheet


ET12052

Low PIM 7/16 DIN Male to 4.3-10 Male Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Low PIM 7/16 DIN Male to 4.3-10 Male Adapter ET12052

URL: https://www.ebeestock.com/low-pim-7-16-din-male-to-4-3-10-male-adapter-0012052

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

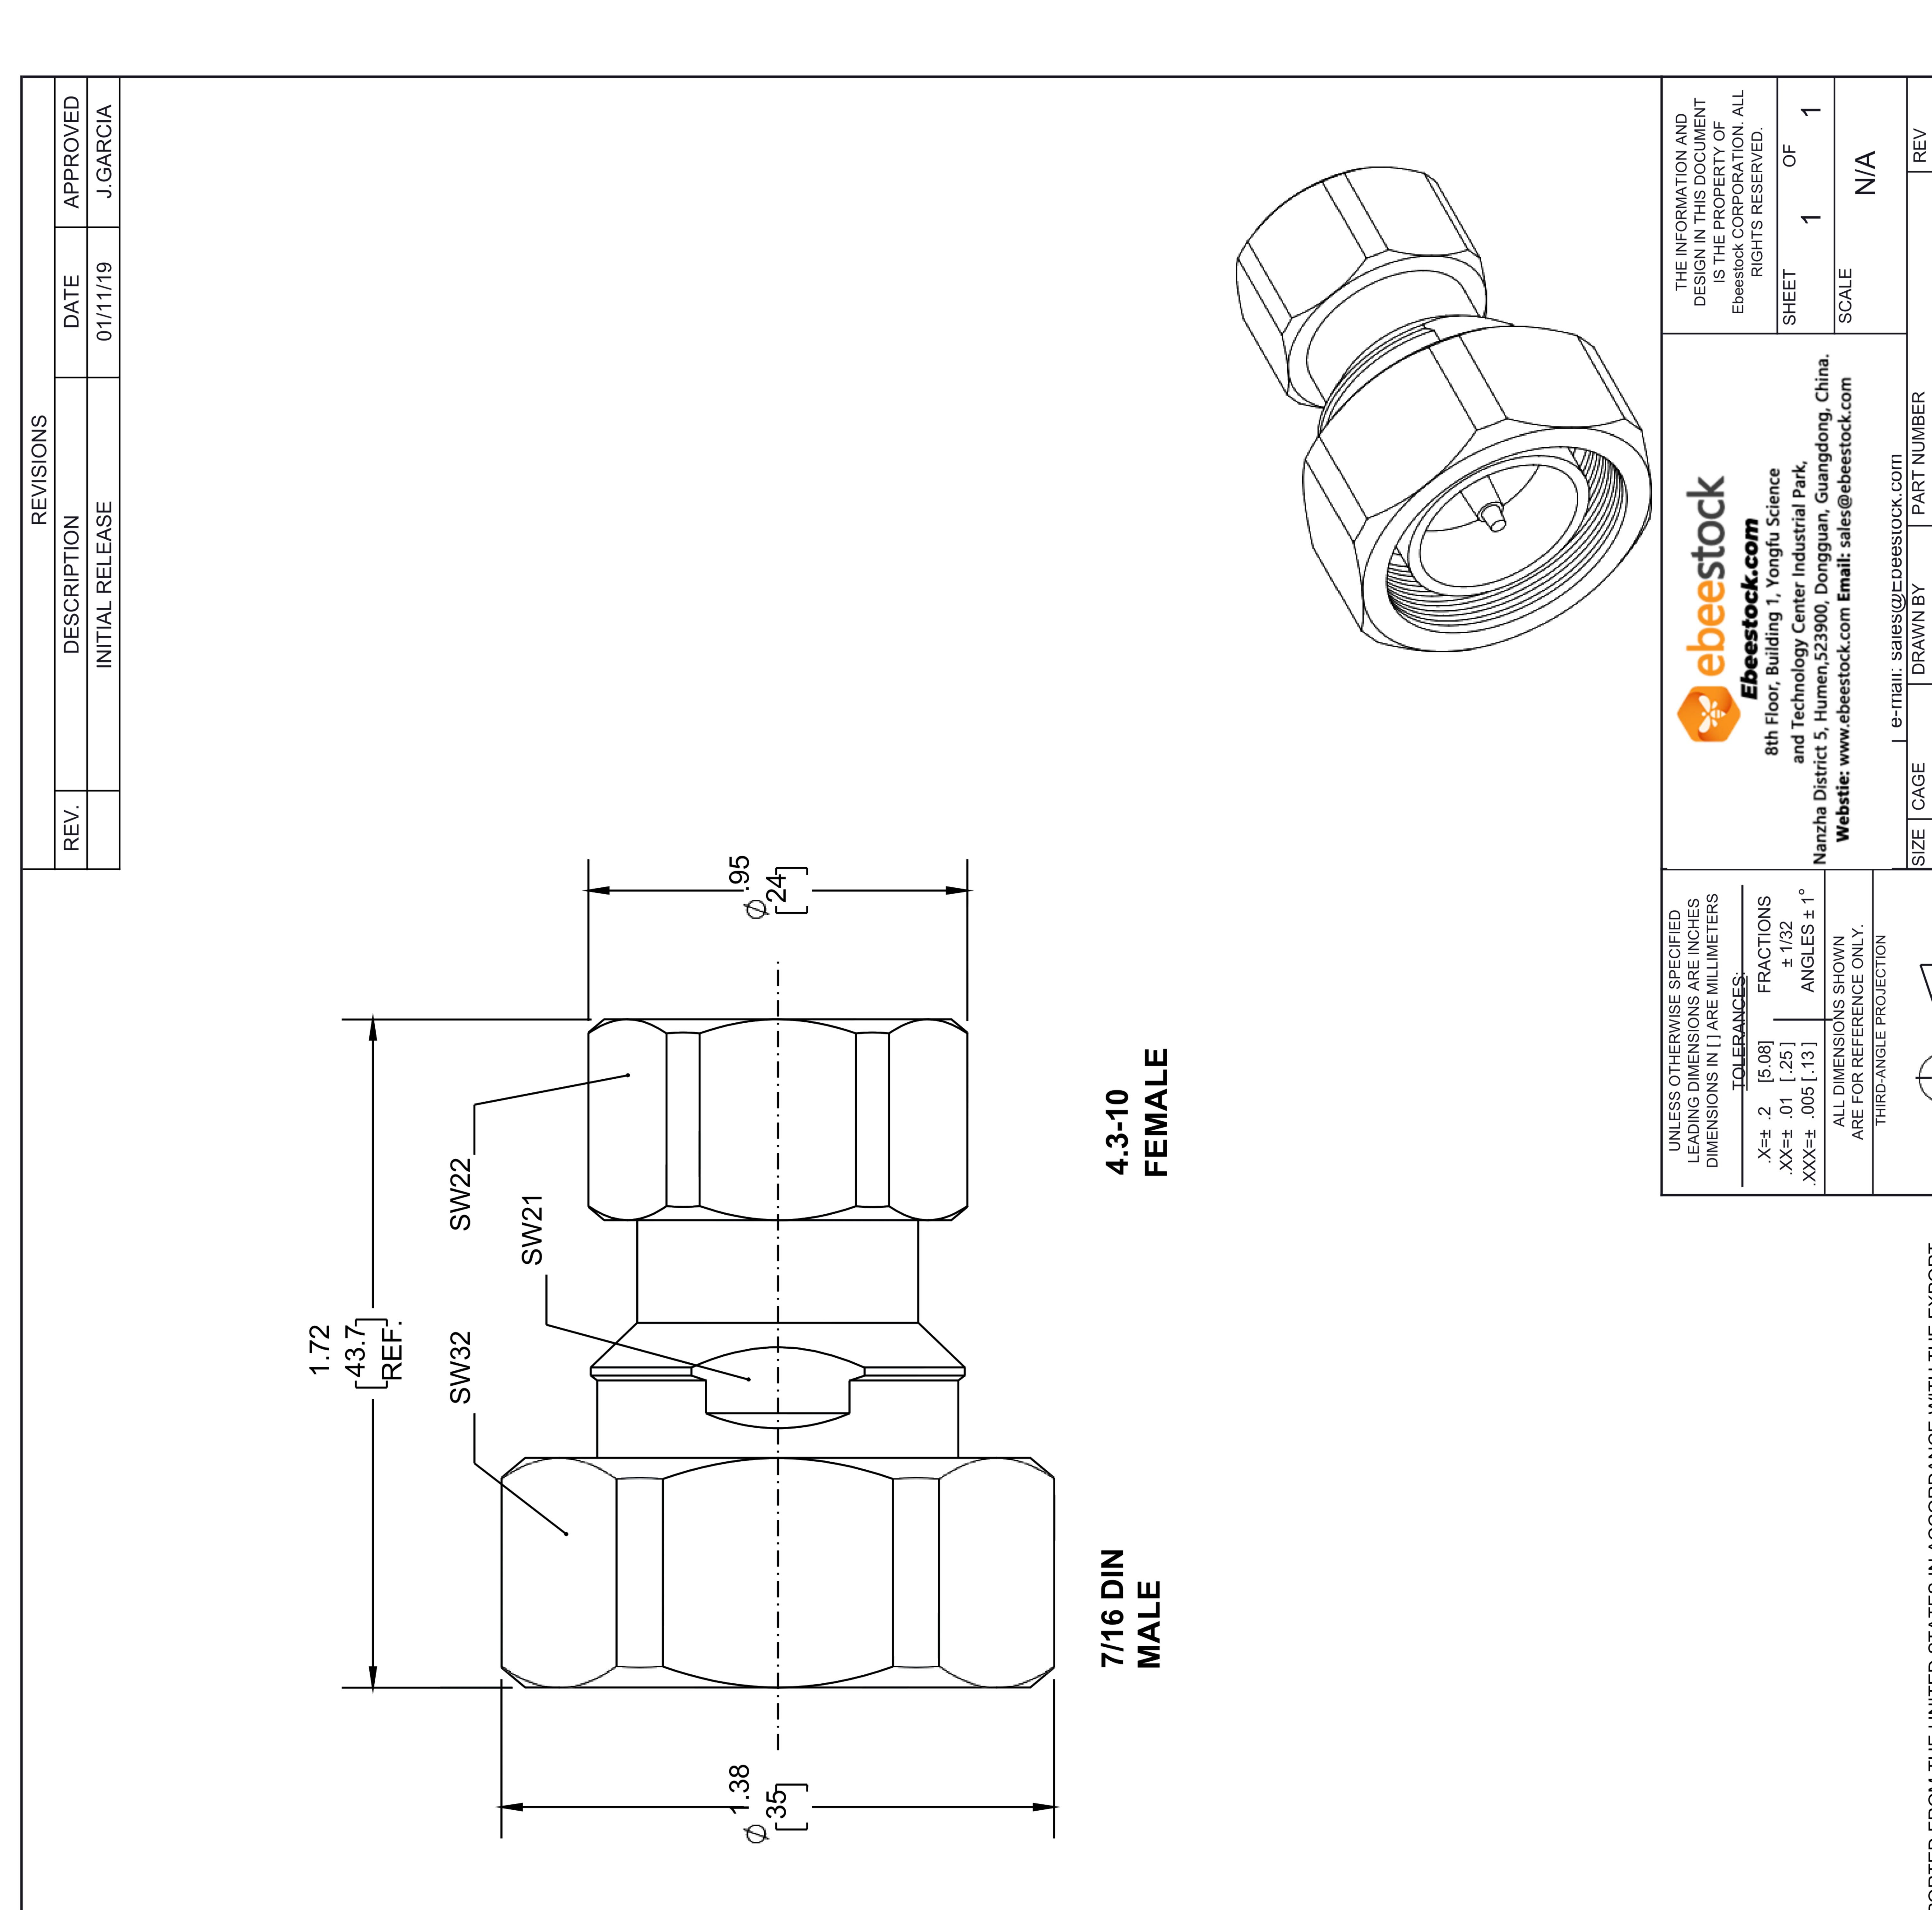

MMODITIES, TECHNOLOGY OK SOFTWAKE WEKE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORTED ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.