


MHV Male to BNC Female Adapter

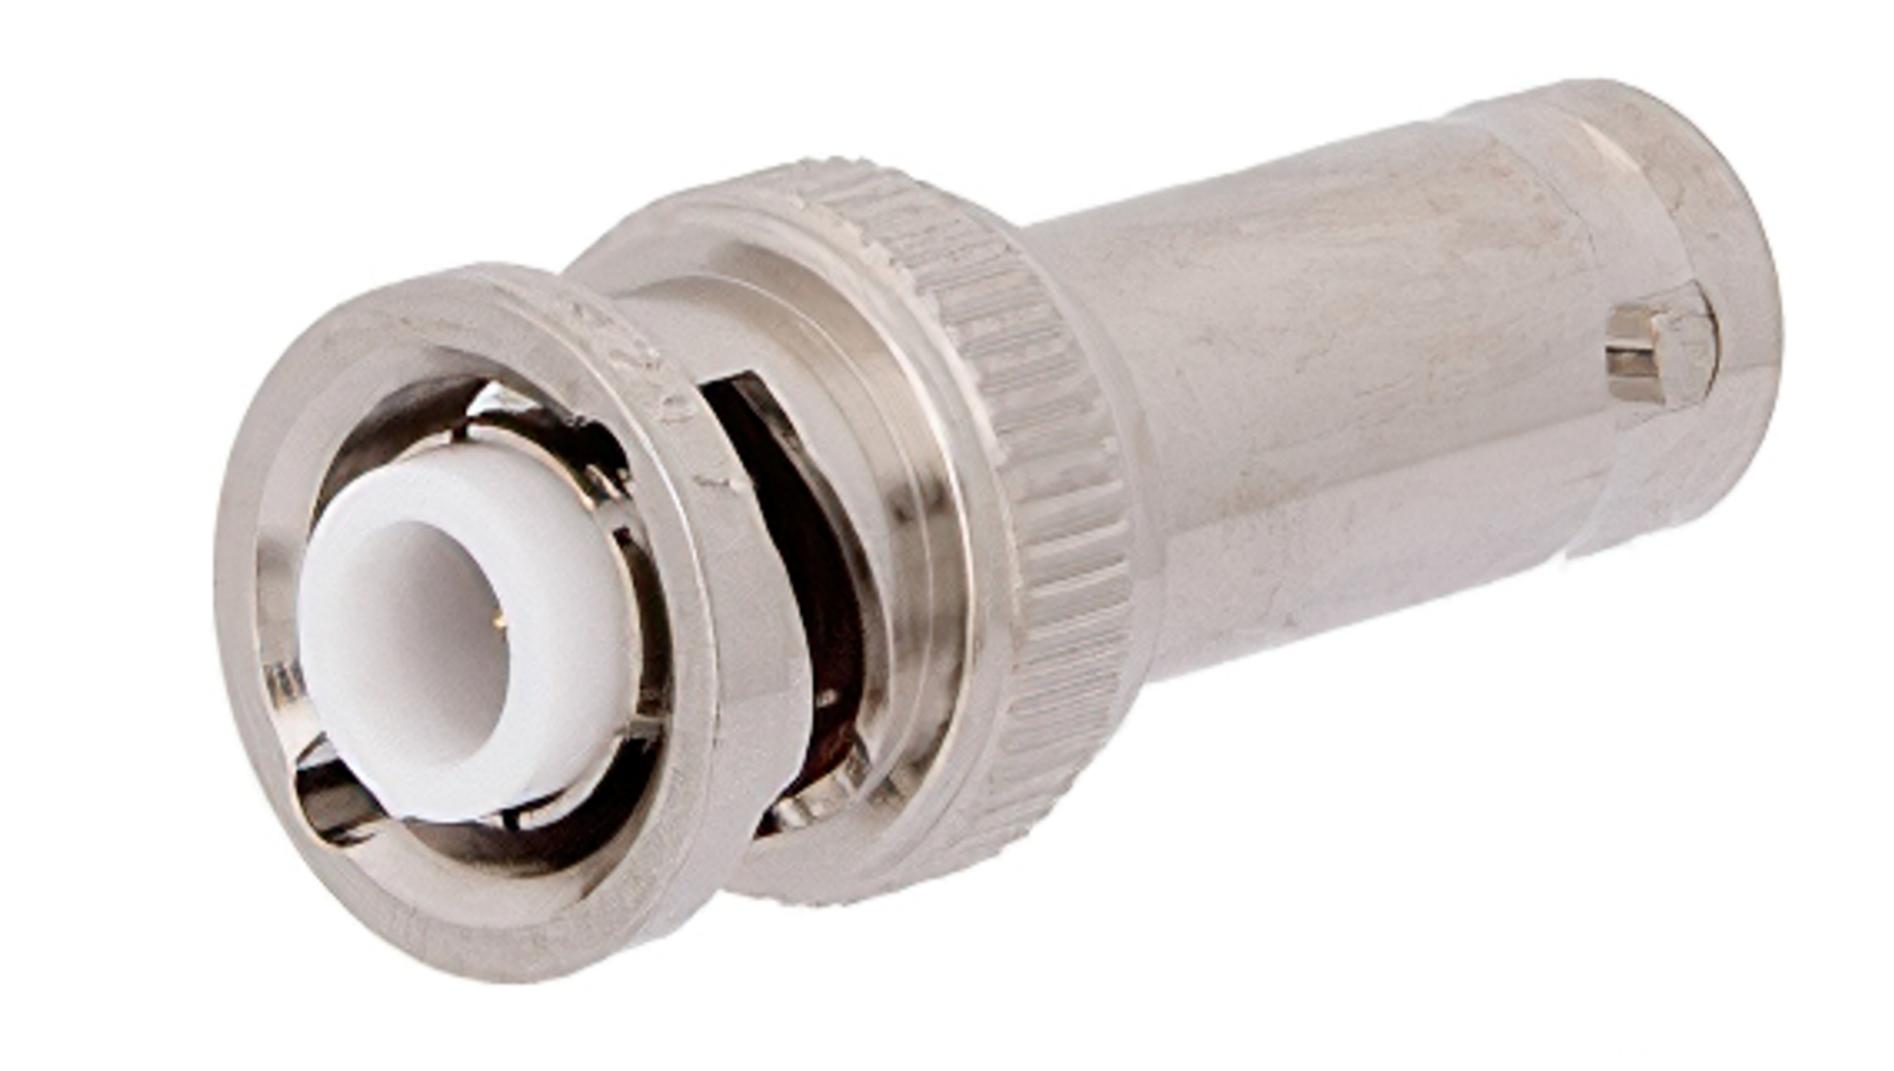

RF Adapters Technical Data Sheet

ET1222

4

Configuration

- MHV Male Connector 1
- BNC Female Connector 2

Features

- Max VSWR of 1.3:1 up to 300 MHz
- MHV interface compliant with MIL-STD-348A
- BNC interface compliant with MIL-STD-348A
- 30 µ-in minimum contact plating
- Gold Plated Brass Contact

- 50 Ohm
- Straight Body Geometry
- Max VSWR of 1.3:1 up to 300 MHz
- MHV Interface compliant with MIL-STD-348A
- Gold Plated Brass Contact
- 30 µ-in min Gold Contact Plating

Applications

- Allows Connection Between Series
- General Purpose Test
- Connector Saver
- General Purpose Test

Description

Ebeestock's ET12224 MHV male to BNC female adapter is part of our full line of RF components available for same-day shipping. Our MHV to BNC adapter has a male to female gender configuration. ET12224 MHV male to BNC female adapter operates to 300 MHz. The Ebeestock RF adapter provides good VSWR of 1.3:1 maximum. Ebeestock's ET12224 MHV female to MHV male adapter is part of our full line of RF components available for same-day shipping. Our MHV to MHV adapter has a female to male gender configuration. ET12224 MHV female to MHV male adapter operates to 300 MHz. The Ebeestock RF adapter provides good VSWR of 1.3:1 maximum. The ET12224 Ebeestock RF adapter can also be used as a connector saver to extend equipment life.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

ectrical Specifications			
Erequency Range	DC	300	MHz
<u>VSWR</u>		1.3:1	
Operating Voltage (AC)		1,600	Vrms
Dielectric Withstanding Voltage (AC)		5,000	Vrms

Mechanical Specifications

Size

Length

1.535 in [38.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MHV Male to BNC Female Adapter ET12224



MHV Male to BNC Female Adapter



RF Adapters Technical Data Sheet ET12224

Width 0.571 in [14.5 mm] Weight 0.037 lbs [16.78 g]

Description	Connector 1	Connector 2
Type	MHV Male	BNC Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348A	MIL-STD-348A

Material Specifications

	Connector 1		Connector 2	
Description	Material	Plating	Material	Plating
Туре	MHV Male		BNC Female	
Contact	Brass	Gold	Brass	Gold
		30 μ-in minimum		30 µ-in minimum
Insulation	PTFE		PTFE	
Outer Conductor			Brass	Nickel
				100 μ-in minimum
Body			Brass	Nickel
				100 μ-in minimum
Coupling Nut	Brass	Nickel		
		100 μ-in minimum		

Environmental SpecificationsTemperature

Operating Range

-65 to 165 deg C

Compliance Certifications (see product page for current document)


Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MHV Male to BNC Female Adapter ET12224



MHV Male to BNC Female Adapter

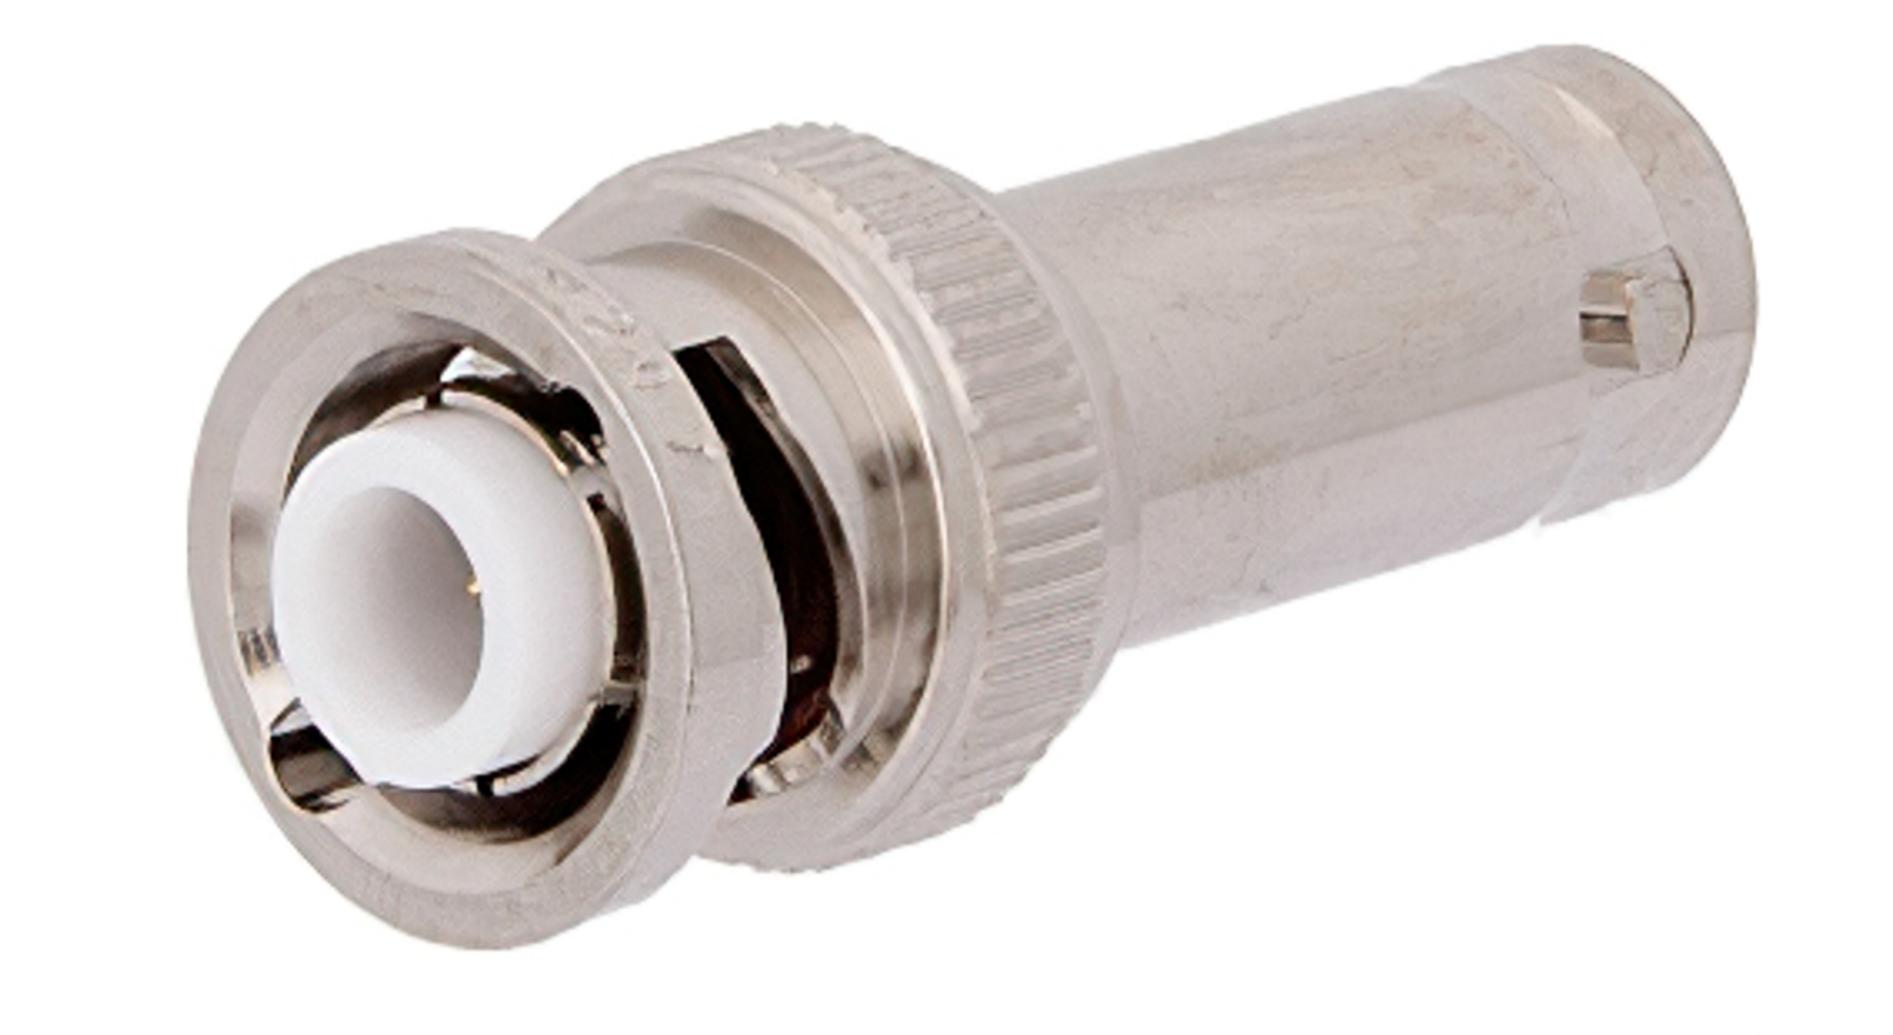

RF Adapters Technical Data Sheet ET12224

MHV Male to BNC Female Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: MHV Male to BNC Female Adapter ET12224

URL: https://www.ebeestock.com/mhv-male-to-bnc-female-adapter-0012224

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12224 CAD Drawing MHV Male to BNC Female Adapter

