

75 Ohm N Female to 75 Ohm BNC Female Adapter



RF Adapters Technical Data Sheet

ET1223

Configuration

- N Female Connector 1
- BNC Female Connector 2

- 75 Ohms
- Straight Body Geometry

Features

Typical VSWR of 1.4:1 up to 1,000 MHz

Gold Plated Brass Contact

Applications

• Allows Connection Between Series

General Purpose Test

Description

Ebeestock's ET12230 75 ohm type N female to BNC female adapter is part of our full line of RF components available for same-day shipping. Our type N to BNC adapter has a female to female gender configuration. ET12230 type N female to BNC female adapter operates to 1,000 MHz.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Frequency Range	DC	1,000	MHz
VSWR	1.4:1		
Electrical Specification Notes: Values at 25°C, sea level.			
hanical Specifications			
Size	1 E :- FO	0 1 1	
		-	
		s [27.67 g]	
Length Width Weight	0.67 in	8.1 mm] [17.02 mm] [s [27.67 g]	
ype	N Female	BNC Femal	e
Polarity	Standard	Standard	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Ohm N Female to BNC Female Adapter ET12230

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



75 Ohm N Female to 75 Ohm BNC Female Adapter



RF Adapters Technical Data Sheet ET12230

Material Specifications

Description	Connector 1		Connector 2		
	Material	Plating	Material	Plating	
Туре	N Female		BNC Female		
Contact	Brass	Gold	Brass	Gold	
Insulation	PTFE		PTFE		
Outer Conductor	Brass	Nickel	Brass	Nickel	

Environmental Specifications

Temperature

Operating Range


-65 to +165 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Typical Performance Data

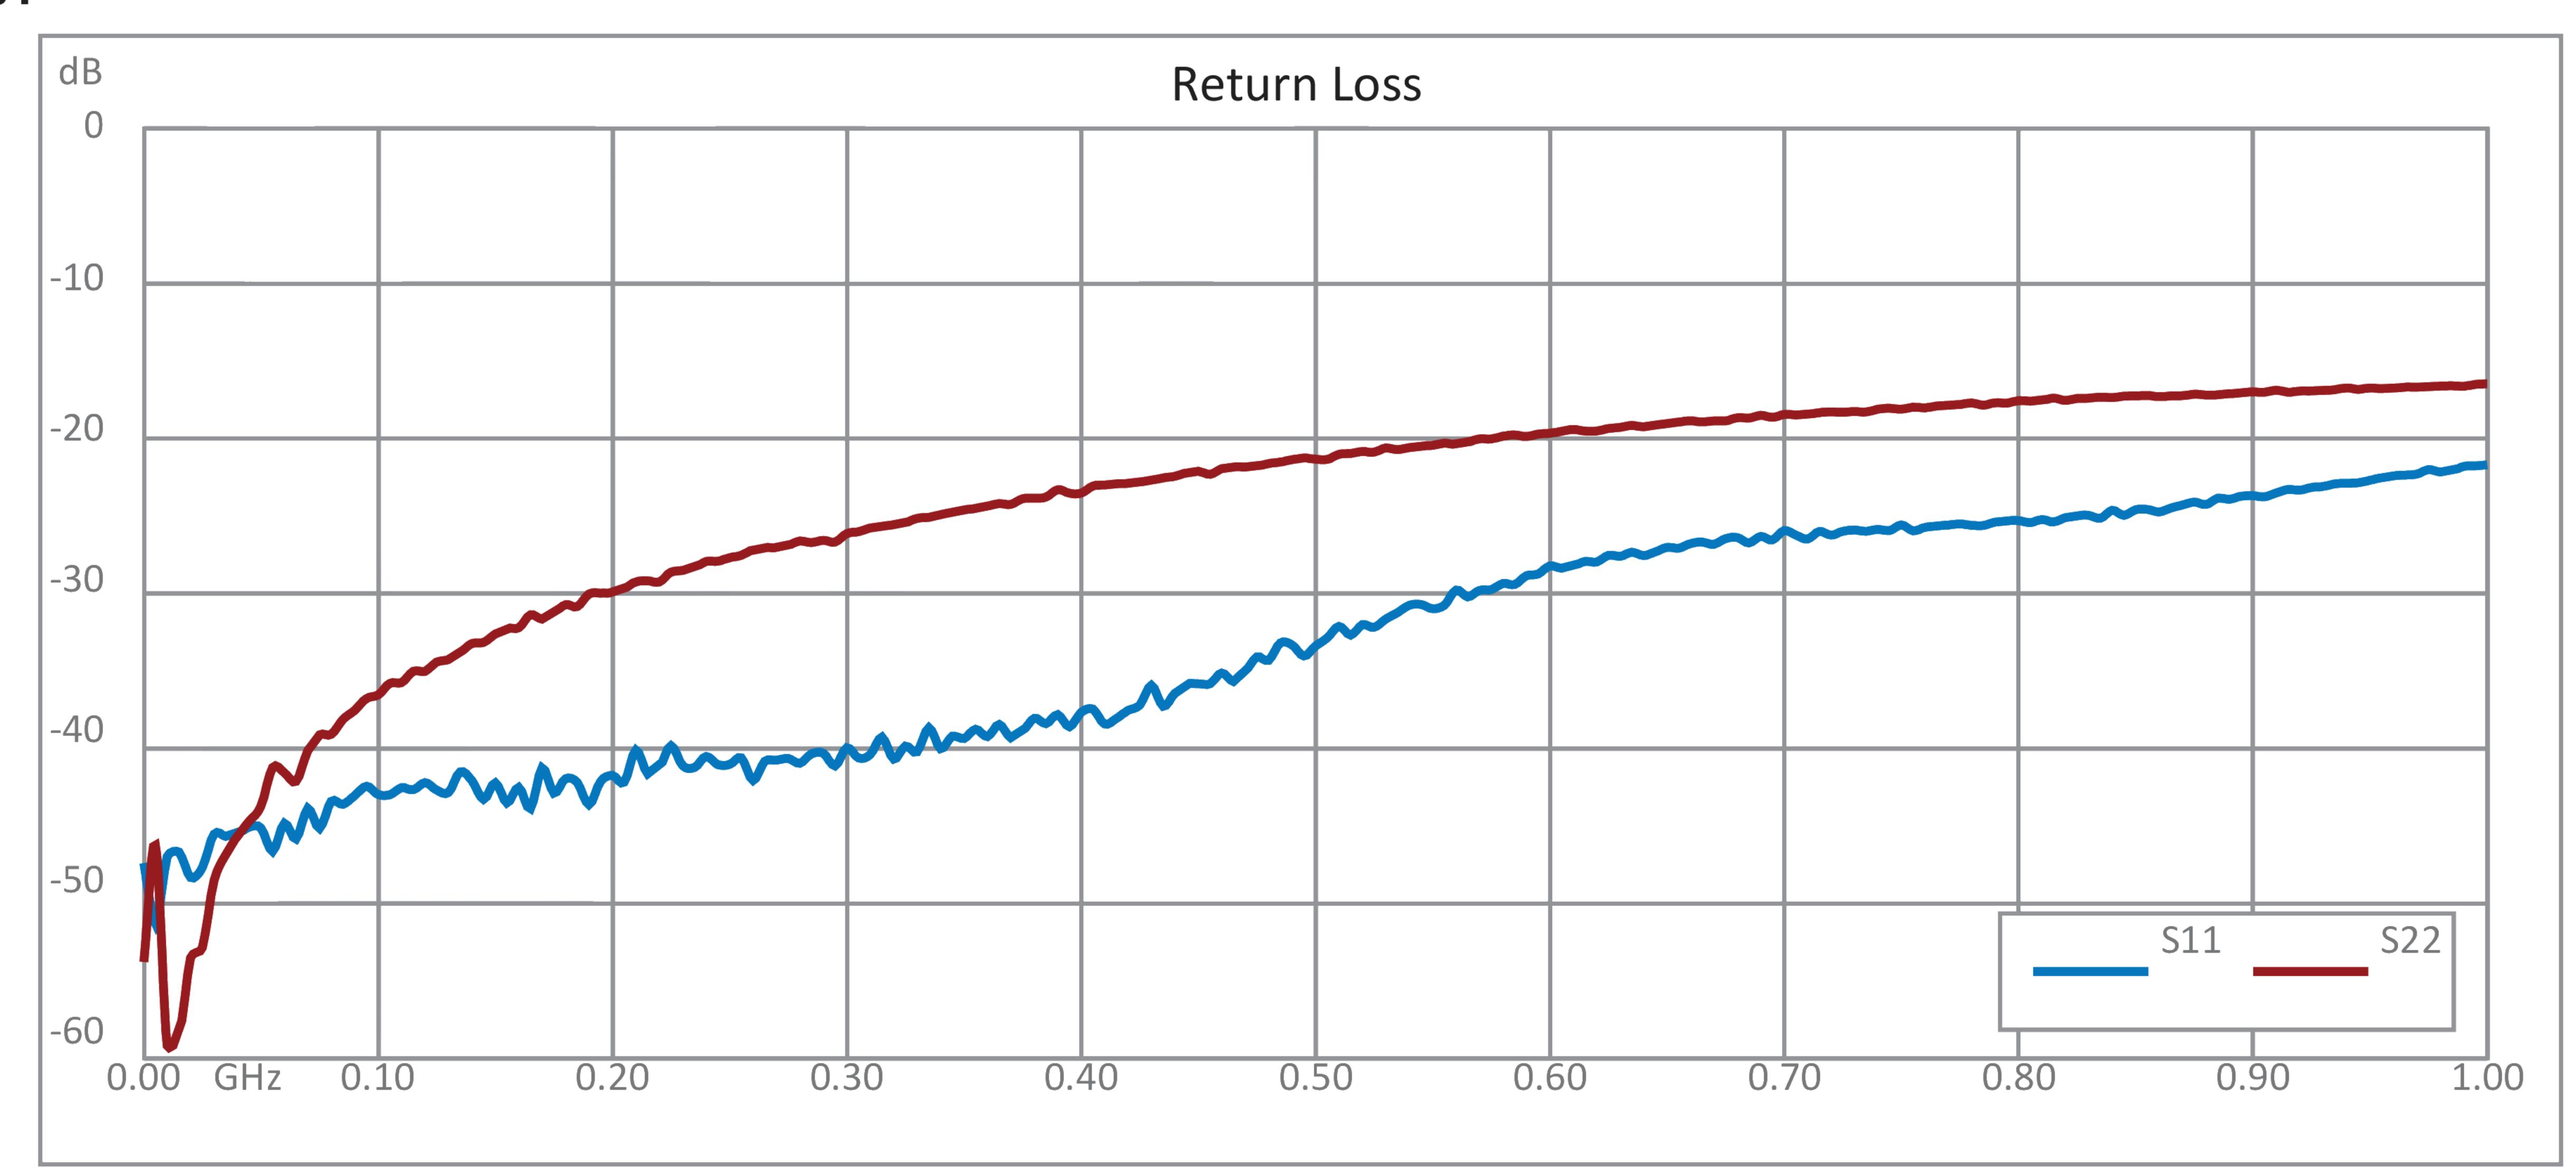

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Ohm N Female to BNC Female Adapter ET12230


8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



75 Ohm N Female to 75 Ohm BNC Female Adapter



RF Adapters Technical Data Sheet ET12230

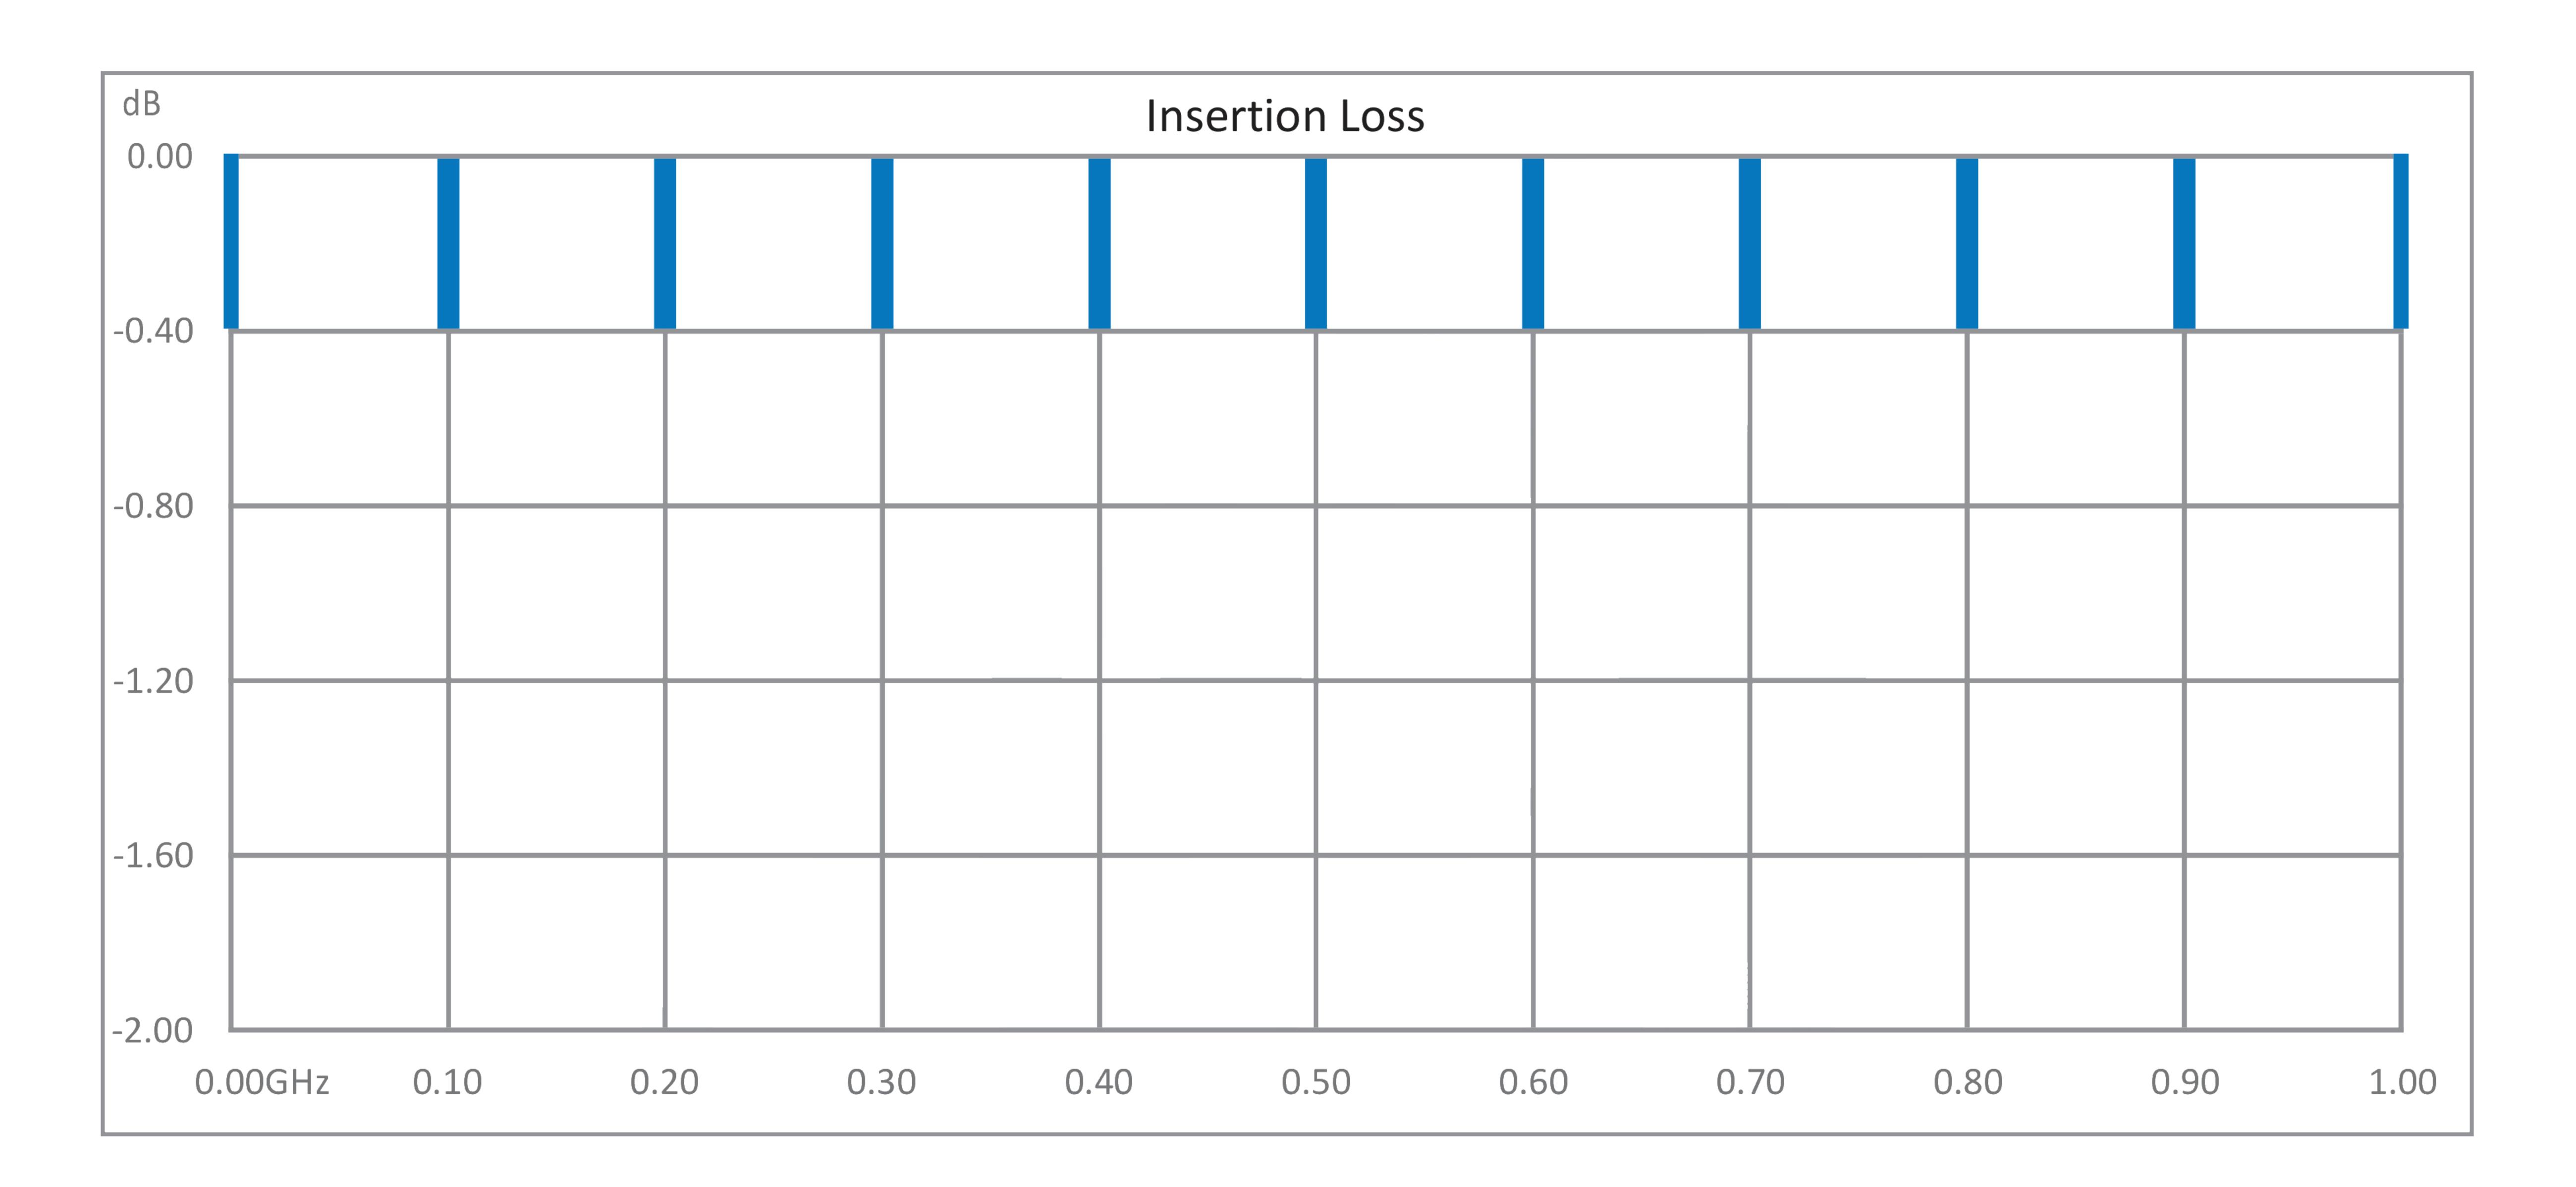

75 Ohm N Female to BNC Female Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 75 Ohm N Female to BNC Female Adapter ET12230

URL: https://www.ebeestock.com/75-ohm-n-female-to-75-ohm-bnc-female-adapter-0012230

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. <a href="Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12230 CAD Drawing 75 Ohm N Female to BNC Female Adapter

