

Precision SMA Male to N Male Adapter



RF Adapters Technical Data Sheet

ET1257

5

Configuration

- SMA Male Connector 1
- N Male Connector 2
- 50 Ohms

- Precision Design
- Straight Body Geometry

Features

- Max VSWR of 1.15:1 up to 18 GHz
- SMA Interface compliant with MIL-C-39012
- N Interface compliant with MIL-C-39012
- Gold Plated Beryllium Copper Contact

Applications

Allows Connection Between Series
 General Purpose Test

Precision Test & Measurement

Description

Ebeestock's ET12575 precision SMA male to type N male adapter is part of our full line of RF components available for same- day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. Our SMA to type N adapter has a male to male gender configuration built of durable stainless steel in a precision design. ET12575 SMA male to type N male adapter operates to 18 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.15:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications			
Frequency Range	DC	18	GHz
VSWR		1.15:1	

Mechanical Specifications

Size

 Length
 1.52 in [38.61 mm]

 Width
 0.8 in [20.32 mm]

 Weight
 0.1 lbs [45.36 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to N Male Adapter ET12575



Precision SMA Male to N Male Adapter



RF Adapters Technical Data Sheet ET12575

Description	Connector 1	Connector 2
Туре	SMA Male	N Male
Polarity	Standard	Standard
Interface Specification	MIL-C-39012	MIL-C-39012
Hex Size	5/16 in.	
Mating Torque	8 to 10 in-lbs [0.90 to 1.13 Nm]	

Material Specifications

	Connector 1		Connector 2		
Description	n Material	Plating	Material	Plating	
Туре	SMA Male		N Male		
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold	
Body	Passivated Stainless Steel		Passivated Stainless Steel		
Coupling Nut	Passivated Stainless Steel		Passivated Stainless Steel		

Environmental Specifications

Temperature

Operating Range

-65 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to N Male Adapter ET12575




Precision SMA Male to N Male Adapter



RF Adapters Technical Data Sheet ET12575

Typical Performance Data

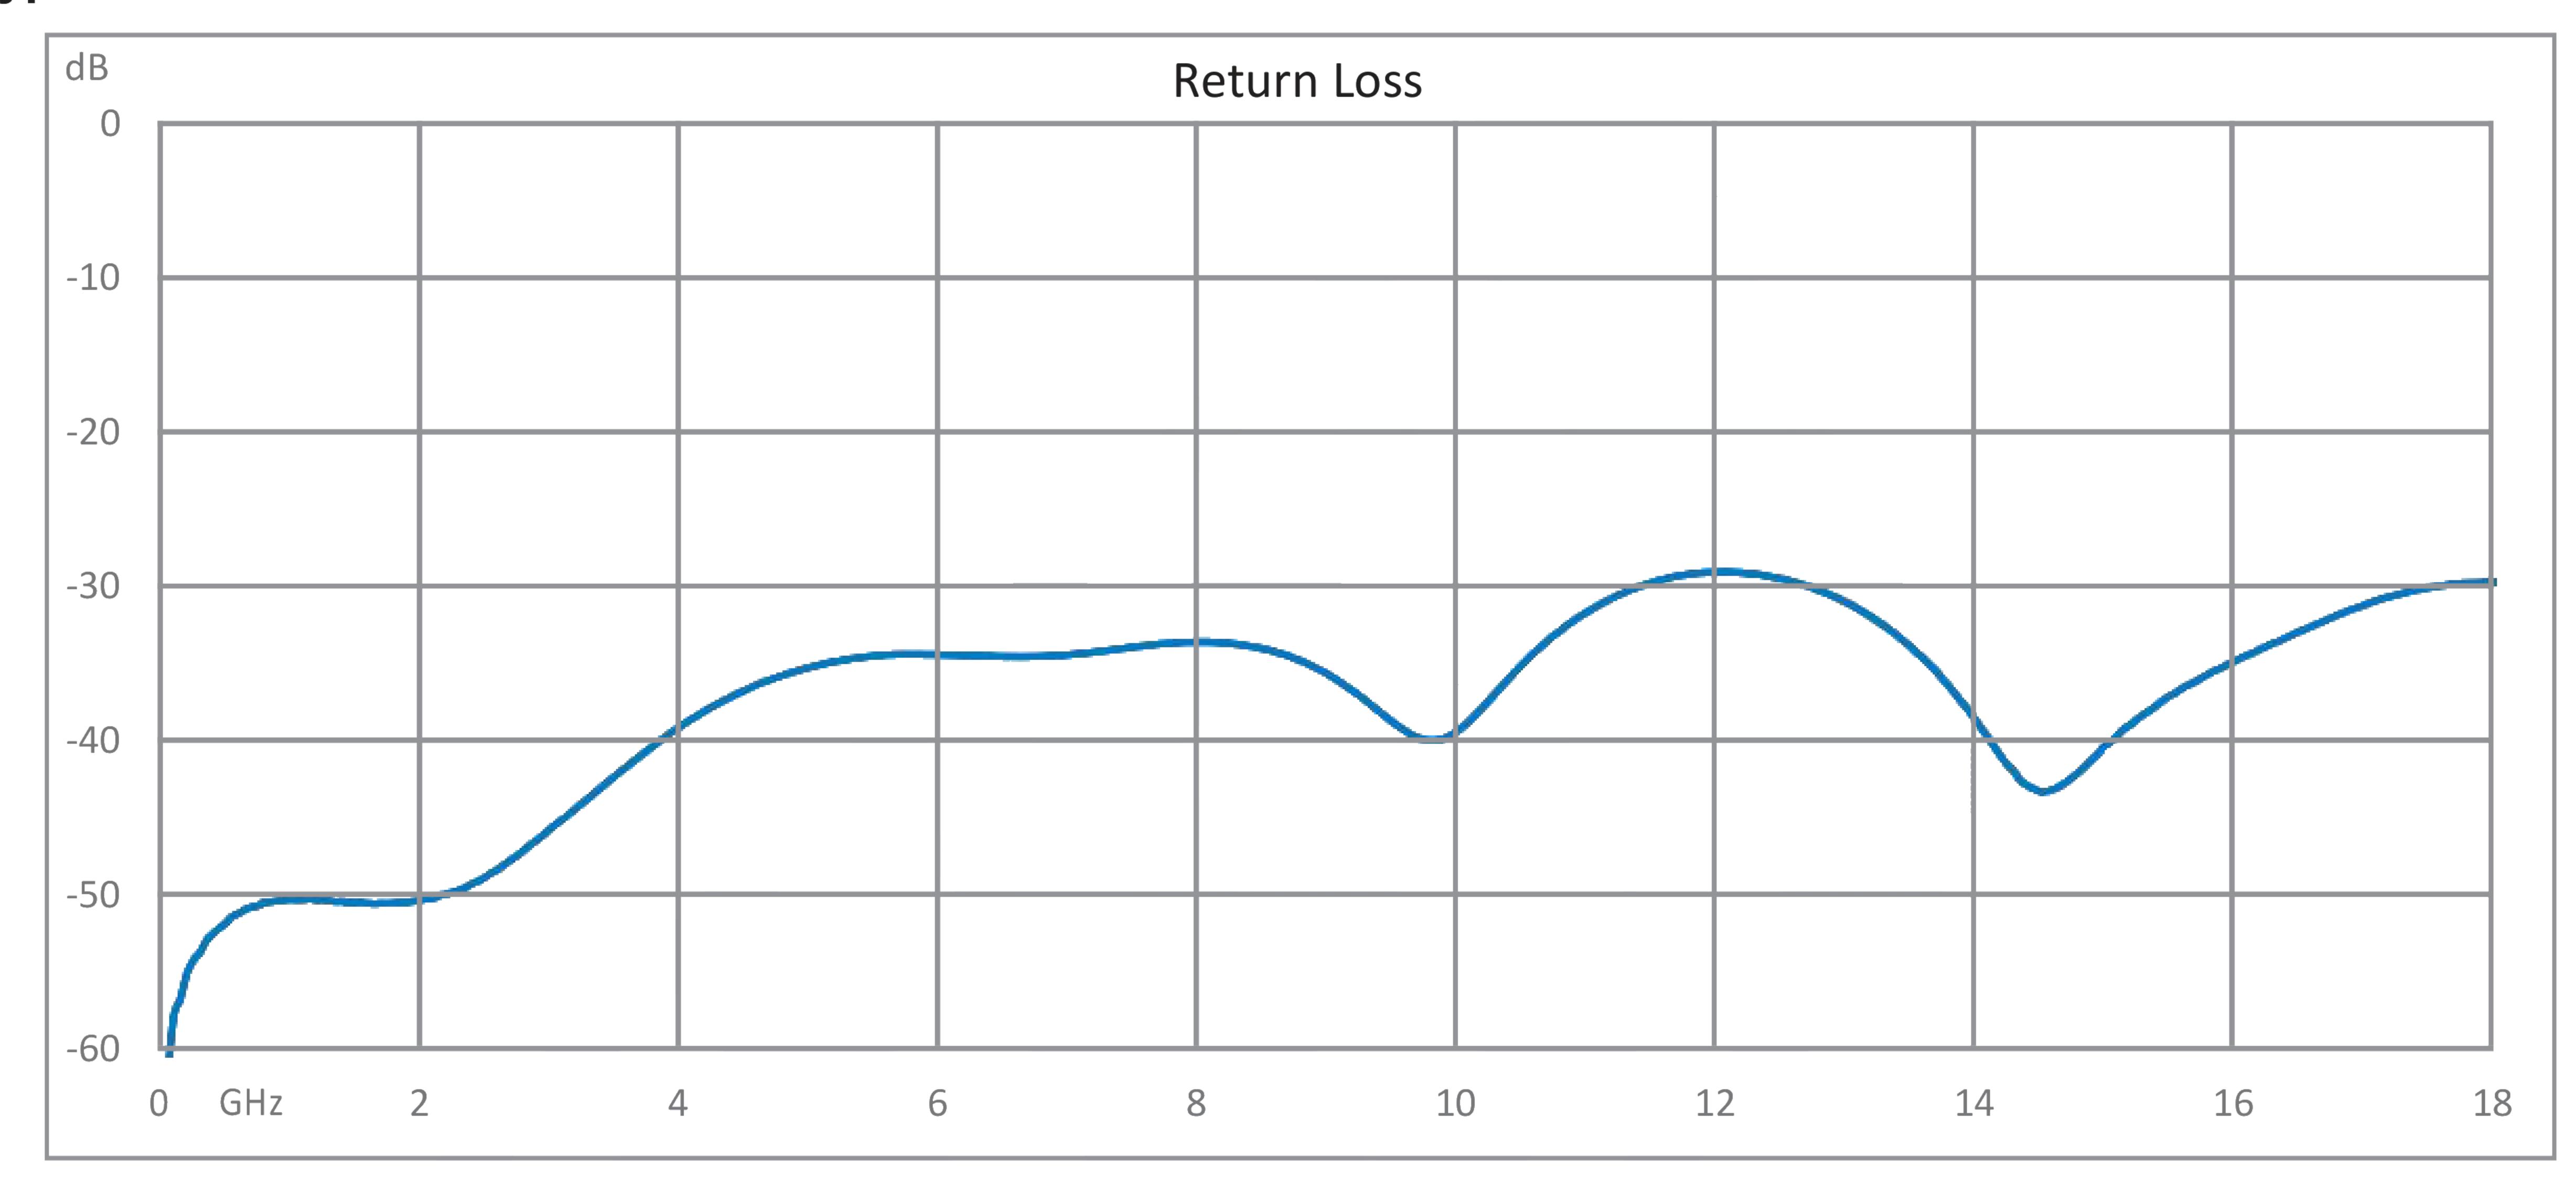

Precision SMA Male to N Male Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to N Male Adapter ET12575

URL: https://www.ebeestock.com/precision-sma-male-to-n-male-adapter-0012575

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12575 CAD Drawing Precision SMA Male to N Male Adapter

