SMA Male to SMP Male Limited Detent Adapter

TECHNICAL DATA SHEET ET12668

Configuration	
Connector 1	SMA Male
Impedance 1	50 Ohms
Connector 2	Limited Detent SMP Male
Impedance 2	50 Ohms
Adapter Design	Standard
Body Style	Straight
Electrical Specifications	
Frequency Range	DC to 18 GHz
Maximum VSWR	1.2:1
Mechanical Specifications	
Size	
Length, in [mm]	0.937 [23.8]
Width/Dia., in [mm]	0.354331 [9]
Connector 1	
Type	SMA Male
Inner Conductor Material and Plating	Beryllium Copper, Gold
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size, inch	16-May
Torque, in-lbs [Nm]	8 [0.9]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE
Connector 2	
Type	Limited Detent SMP Male
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	PTFE
Environmental Specifications	
Temperature	
Operating Range	-45 to +120 deg C
Compliance Certifications (visit for current document)	RoHS Compliant
REACH Compliant	6/6/2014

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMP Male Limited Detent Adapter ET12668

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park,
Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

Webstie:www.ebeestock.com Email:sales@ebeestock.com

© 2022 Ebeestock Enterprises All Rights Reserved

SMA Male to SMP Male Limited Detent Adapter

TECHNICAL DATA SHEET ET12668

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

SMA Male to SMP Male Limited Detent Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMP Male Limited Detent Adapter ET12668

URL: https://www.ebeestock.com/sma-male-to-smp-male-limited-detent-adapter-0012668

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park,
Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

Webstie:www.ebeestock.com Email:sales@ebeestock.com

© 2022 Ebeestock Enterprises All Rights Reserved

ET12668 CAD Drawing

SMA Male to SMP Male Limited Detent Adapter

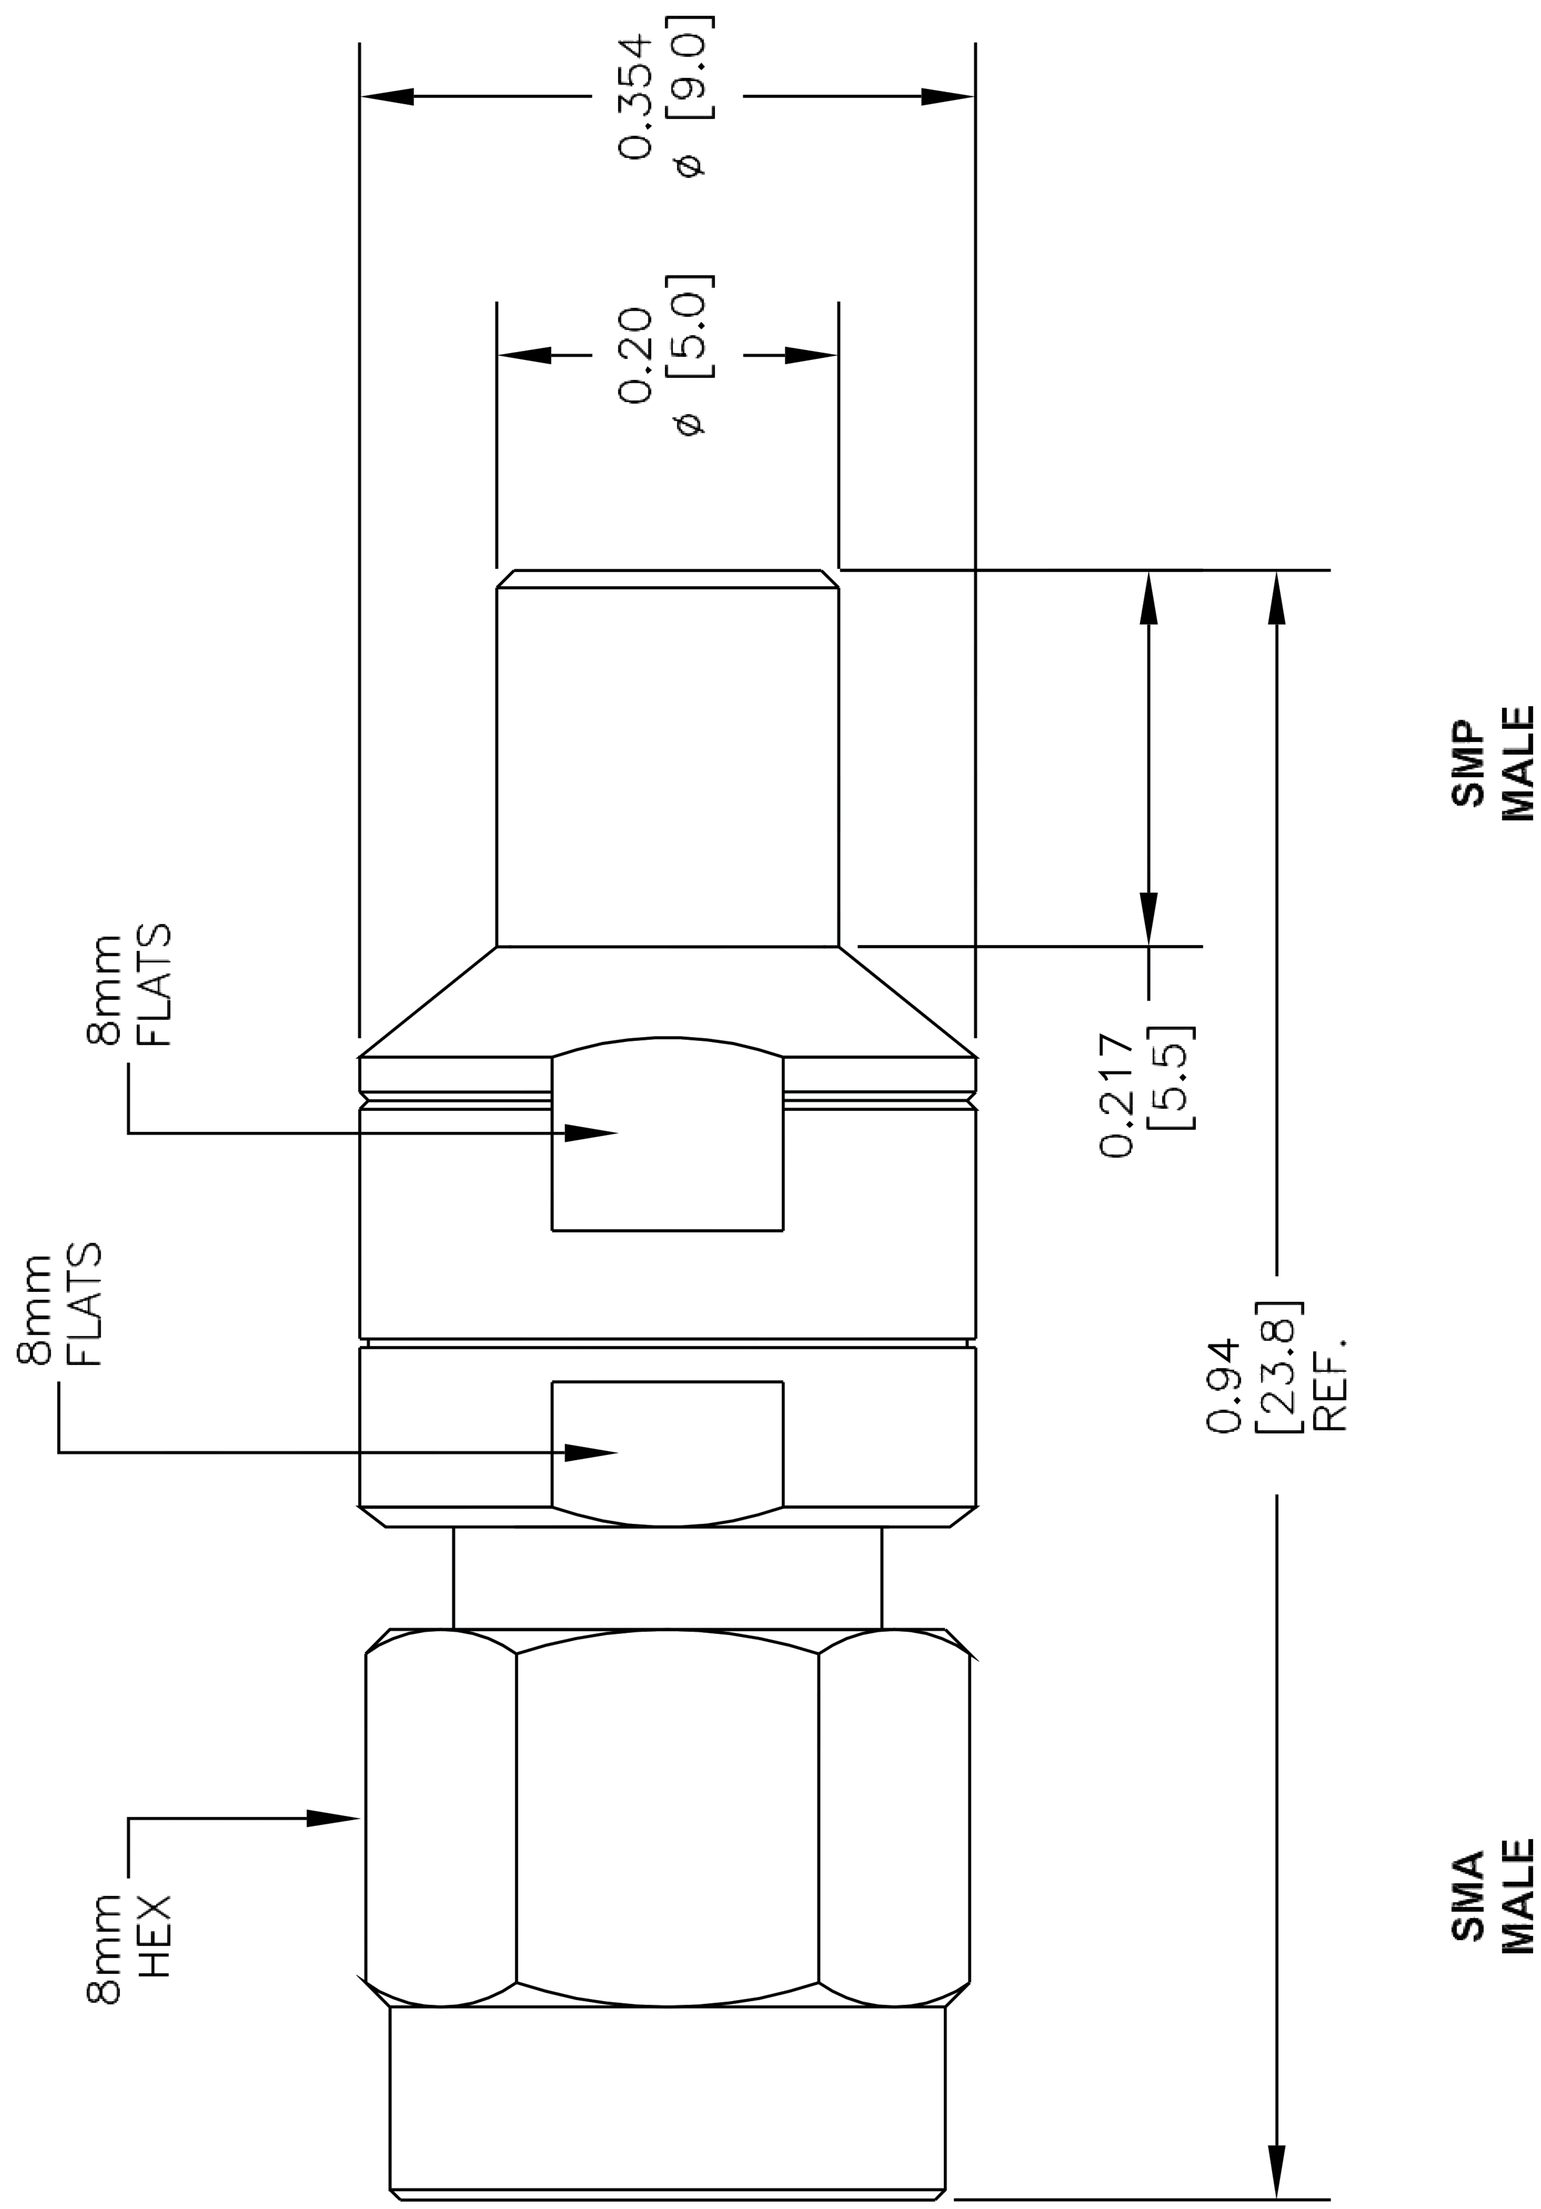

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	CAD FILE 100814	SCALE N/A	SIZE A	150
ET12668	FSCM NO. 53919			

ebeestock
Ebeestock.com
8th Floor, Building 1, Yongfu Science
and Technology Center Industrial Park,
Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.
Webstie: www.ebeestock.com Email: sales@ebeestock.com

© 2022 Ebeestock Enterprises All Rights Reserved