

Precision SMA Male to 2.4mm Female Adapter



RF Adapters Technical Data Sheet

ET1275

Configuration

- SMA Male Connector 1
- 2.4mm Female Connector 2
- 50 Ohm

- Precision Design
- Straight Body Geometry

Features

- Max VSWR of 1.2:1 up to 26.5 GHz
- SMA interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

- Max VSWR of 1.2:1 up to 26.5 GHz
- SMA Interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

Applications

- Allows Connection Between Series
- General Purpose Test
- Precision Test & Measurement
- Allows Connection Between Series
- General Purpose Test
- Precision Test & Measurement

Description

Ebeestock's ET12750 SMA male to 2.4mm female adapter is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. The 2.4mm connector mates mechanically with commercially available 1.85mm (V) connectors. Our SMA to 2.4mm adapter has a male to female gender configuration in a precision design. ET12750 SMA male to 2.4mm female adapter operates to 26.5 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications			
Frequency Range	DC	26.5	GHz
VSWR		1.2:1	

Mechanical Specifications

Size

 Length
 0.82 in [20.83 mm]

 Width
 0.312 in [7.92 mm]

 Weight
 0.013 lbs [5.9 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to 2.4mm Female Adapter ET12750



Precision SMA Male to 2.4mm Female Adapter



RF Adapters Technical Data Sheet ET12750

Description	Connector 1	Connector 2
Type	SMA Male	2.4mm Female
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	
Hex Size	5/16 in.	

Material Specifications

	Connector 1		Connect	tor 2
Descriptio	n Material	Plating	Material	Plating
Туре	SMA Male		2.4mm Female	
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
Outer Conducto	r		Passivated Stainless Steel	
Body	Passivated Stainless Steel			
Coupling Nut	Passivated Stainless Steel			

Environmental Specifications

Temperature

Operating Range

-65 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to 2.4mm Female Adapter ET12750




Precision SMA Male to 2.4mm Female Adapter



RF Adapters Technical Data Sheet

ET12750

Typical Performance Data

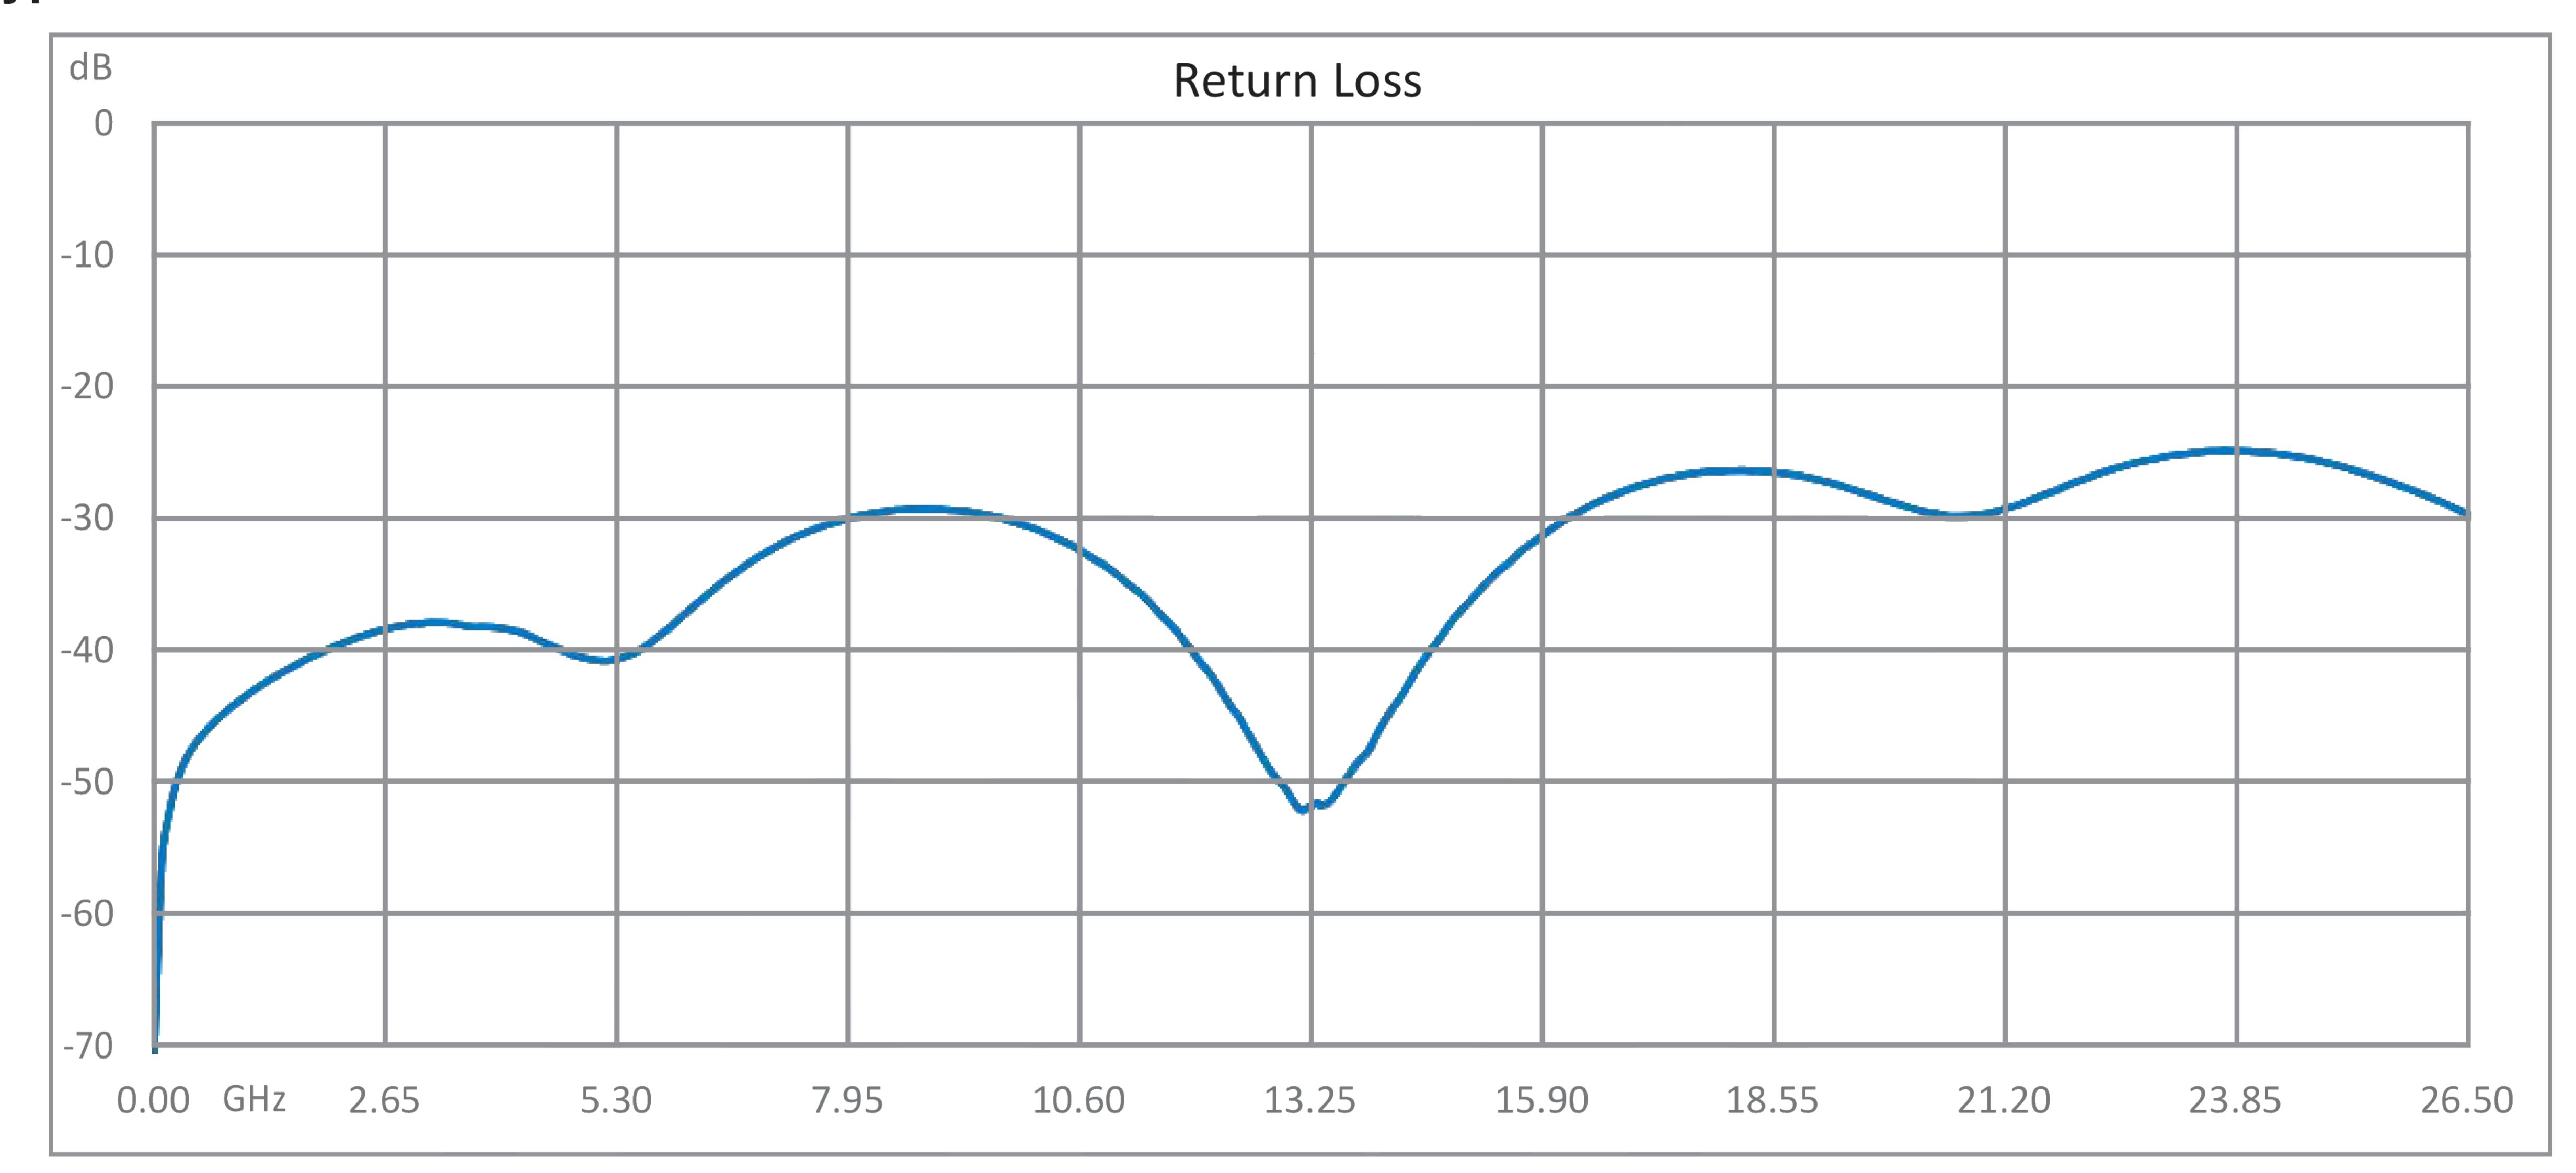

Precision SMA Male to 2.4mm Female Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Precision SMA Male to 2.4mm Female Adapter ET12750

URL: https://www.ebeestock.com/precision-sma-male-to-2-4mm-female-adapter-0012750

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12750 CAD Drawing
Precision SMA Male to 2.4mm Female Adapter

