

SMA Male to SMA Male 4 Hole Flange Mount Adapter



# RF Adapters Technical Data Sheet

ET1275

3

## Configuration

- SMA Male Connector 1
- SMA Male Connector 2
- 50 Ohm

- Straight Body Geometry
- 4 Hole Flange Mount Method

#### Features

- Max VSWR of 1.2:1 up to 18 GHz
- SMA interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

- Max VSWR of 1.2:1 up to 18 GHz
- SMA Interface compliant with MIL-STD-348
- Gold Plated Beryllium Copper Contact

## Applications

- General Purpose Test
- Rack Mounted Equipment
- General Purpose Test
- Rack Mounted Equipment

## Description

Ebeestock's ET12753 SMA male to SMA male 4 hole flange adapter is part of our full line of RF components available for same-day shipping. The SMA connector mates mechanically with commercially available 3.5mm and 2.92mm (K) connectors. Our SMA to SMA adapter has a male to male gender configuration built of durable stainless steel. ET12753 SMA male to SMA male adapter operates to 18 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.2:1 maximum. This RF SMA to SMA 4 hole flange adapter allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

# Electrical Specifications Frequency Range DC 18 GHz VSWR

#### Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12.4	12.4 to 18			GHz
VSWR, Max	1.1:1	1.15:1	1.2:1			

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Male 4 Hole Flange Mount Adapter ET12753

www.ebeestock.com



## SMA Male to SMA Male 4 Hole Flange Mount Adapter



# RF Adapters Technical Data Sheet ET12753

## Mechanical Specifications

Size

 Length
 1.01 in [25.65 mm]

 Width
 0.5 in [12.7 mm]

 Height
 0.5 in [12.7 mm]

 Weight
 0.0195 lbs [8.85 g]

Description	Connector 1	Connector 2
Туре	SMA Male	SMA Male
Polarity	Standard	Standard
Interface Specification	MIL-STD-348	MIL-STD-348
Hex Size	5/16 in.	5/16 in.
Mating Torque	8 to 10 in-lbs [0.90 to 1.13 Nm]	8 to 10 in-lbs 0.90 to 1.13 Nm

#### Material Specifications

	Connecto		Connector 2		
Descriptio	n Material	Plating	Material	Plating	
Туре	SMA Male		SMA Male		
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold	
Body Passivated Stainless Steel			Passivated Stainless Steel		
Coupling Nut	Passivated Stainless Steel		Passivated Stainless Steel		

### **Environmental Specifications**

Temperature

Operating Range -65 to +125 deg C

Compliance Certifications (see product page for current document)

## Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Male 4 Hole Flange Mount Adapter ET12753




SMA Male to SMA Male 4 Hole Flange Mount Adapter



# RF Adapters Technical Data Sheet ET12753

#### **Typical Performance Data**

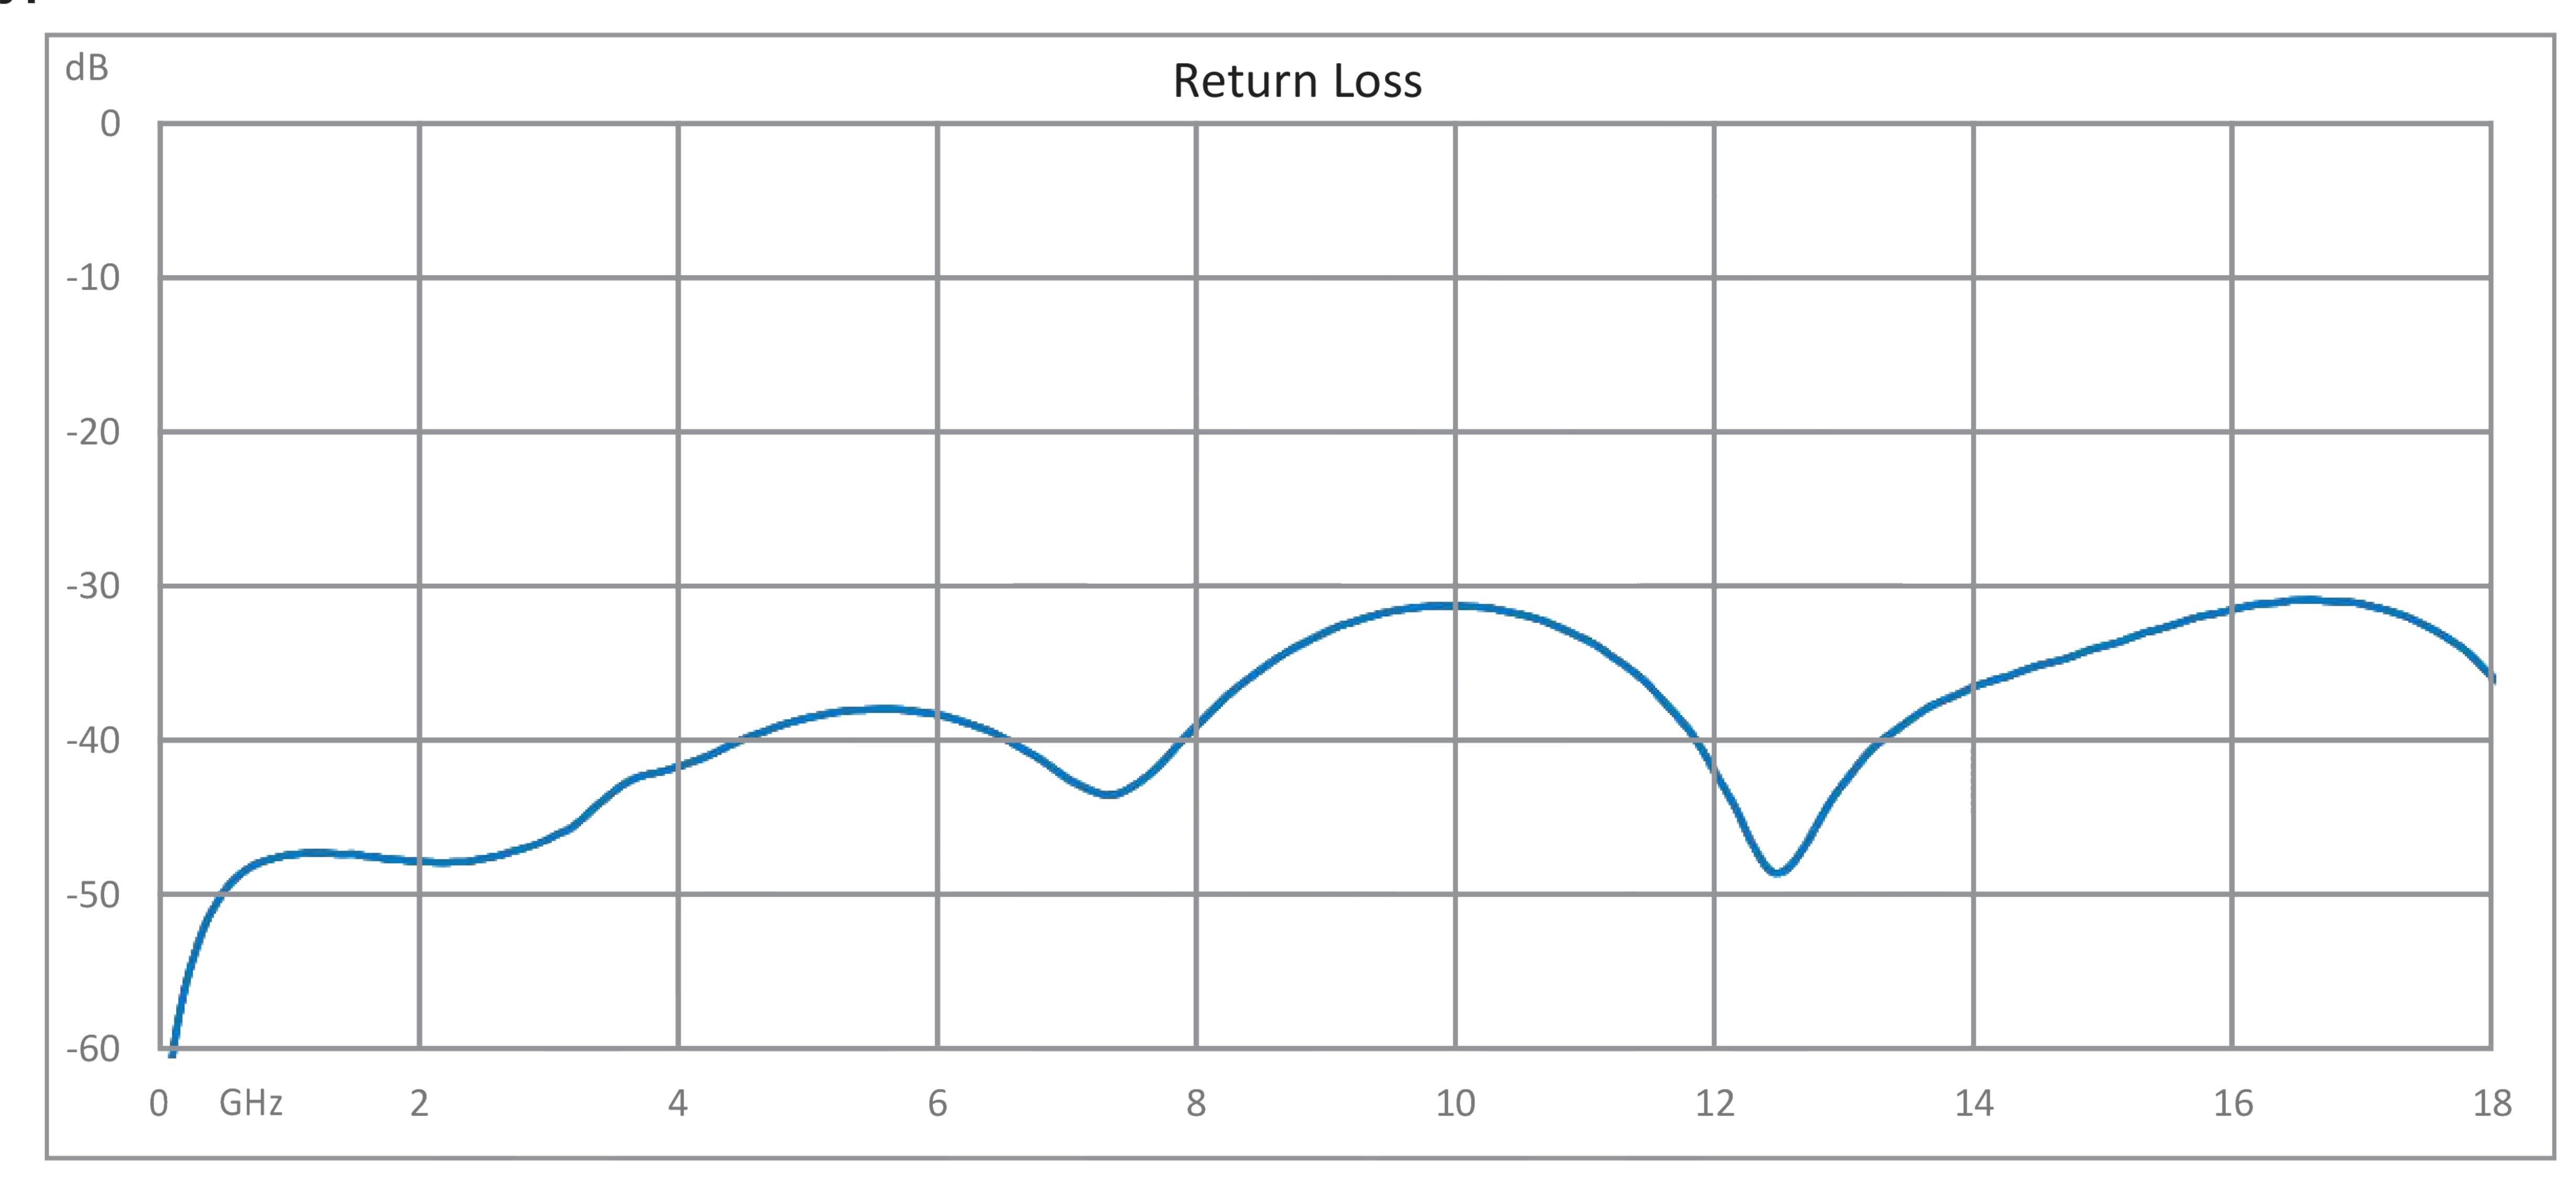



SMA Male to SMA Male 4 Hole Flange Mount Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: SMA Male to SMA Male 4 Hole Flange Mount Adapter ET12753

URL: https://www.ebeestock.com/sma-male-to-sma-male-4-hole-flange-mount-adapter-0012753

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

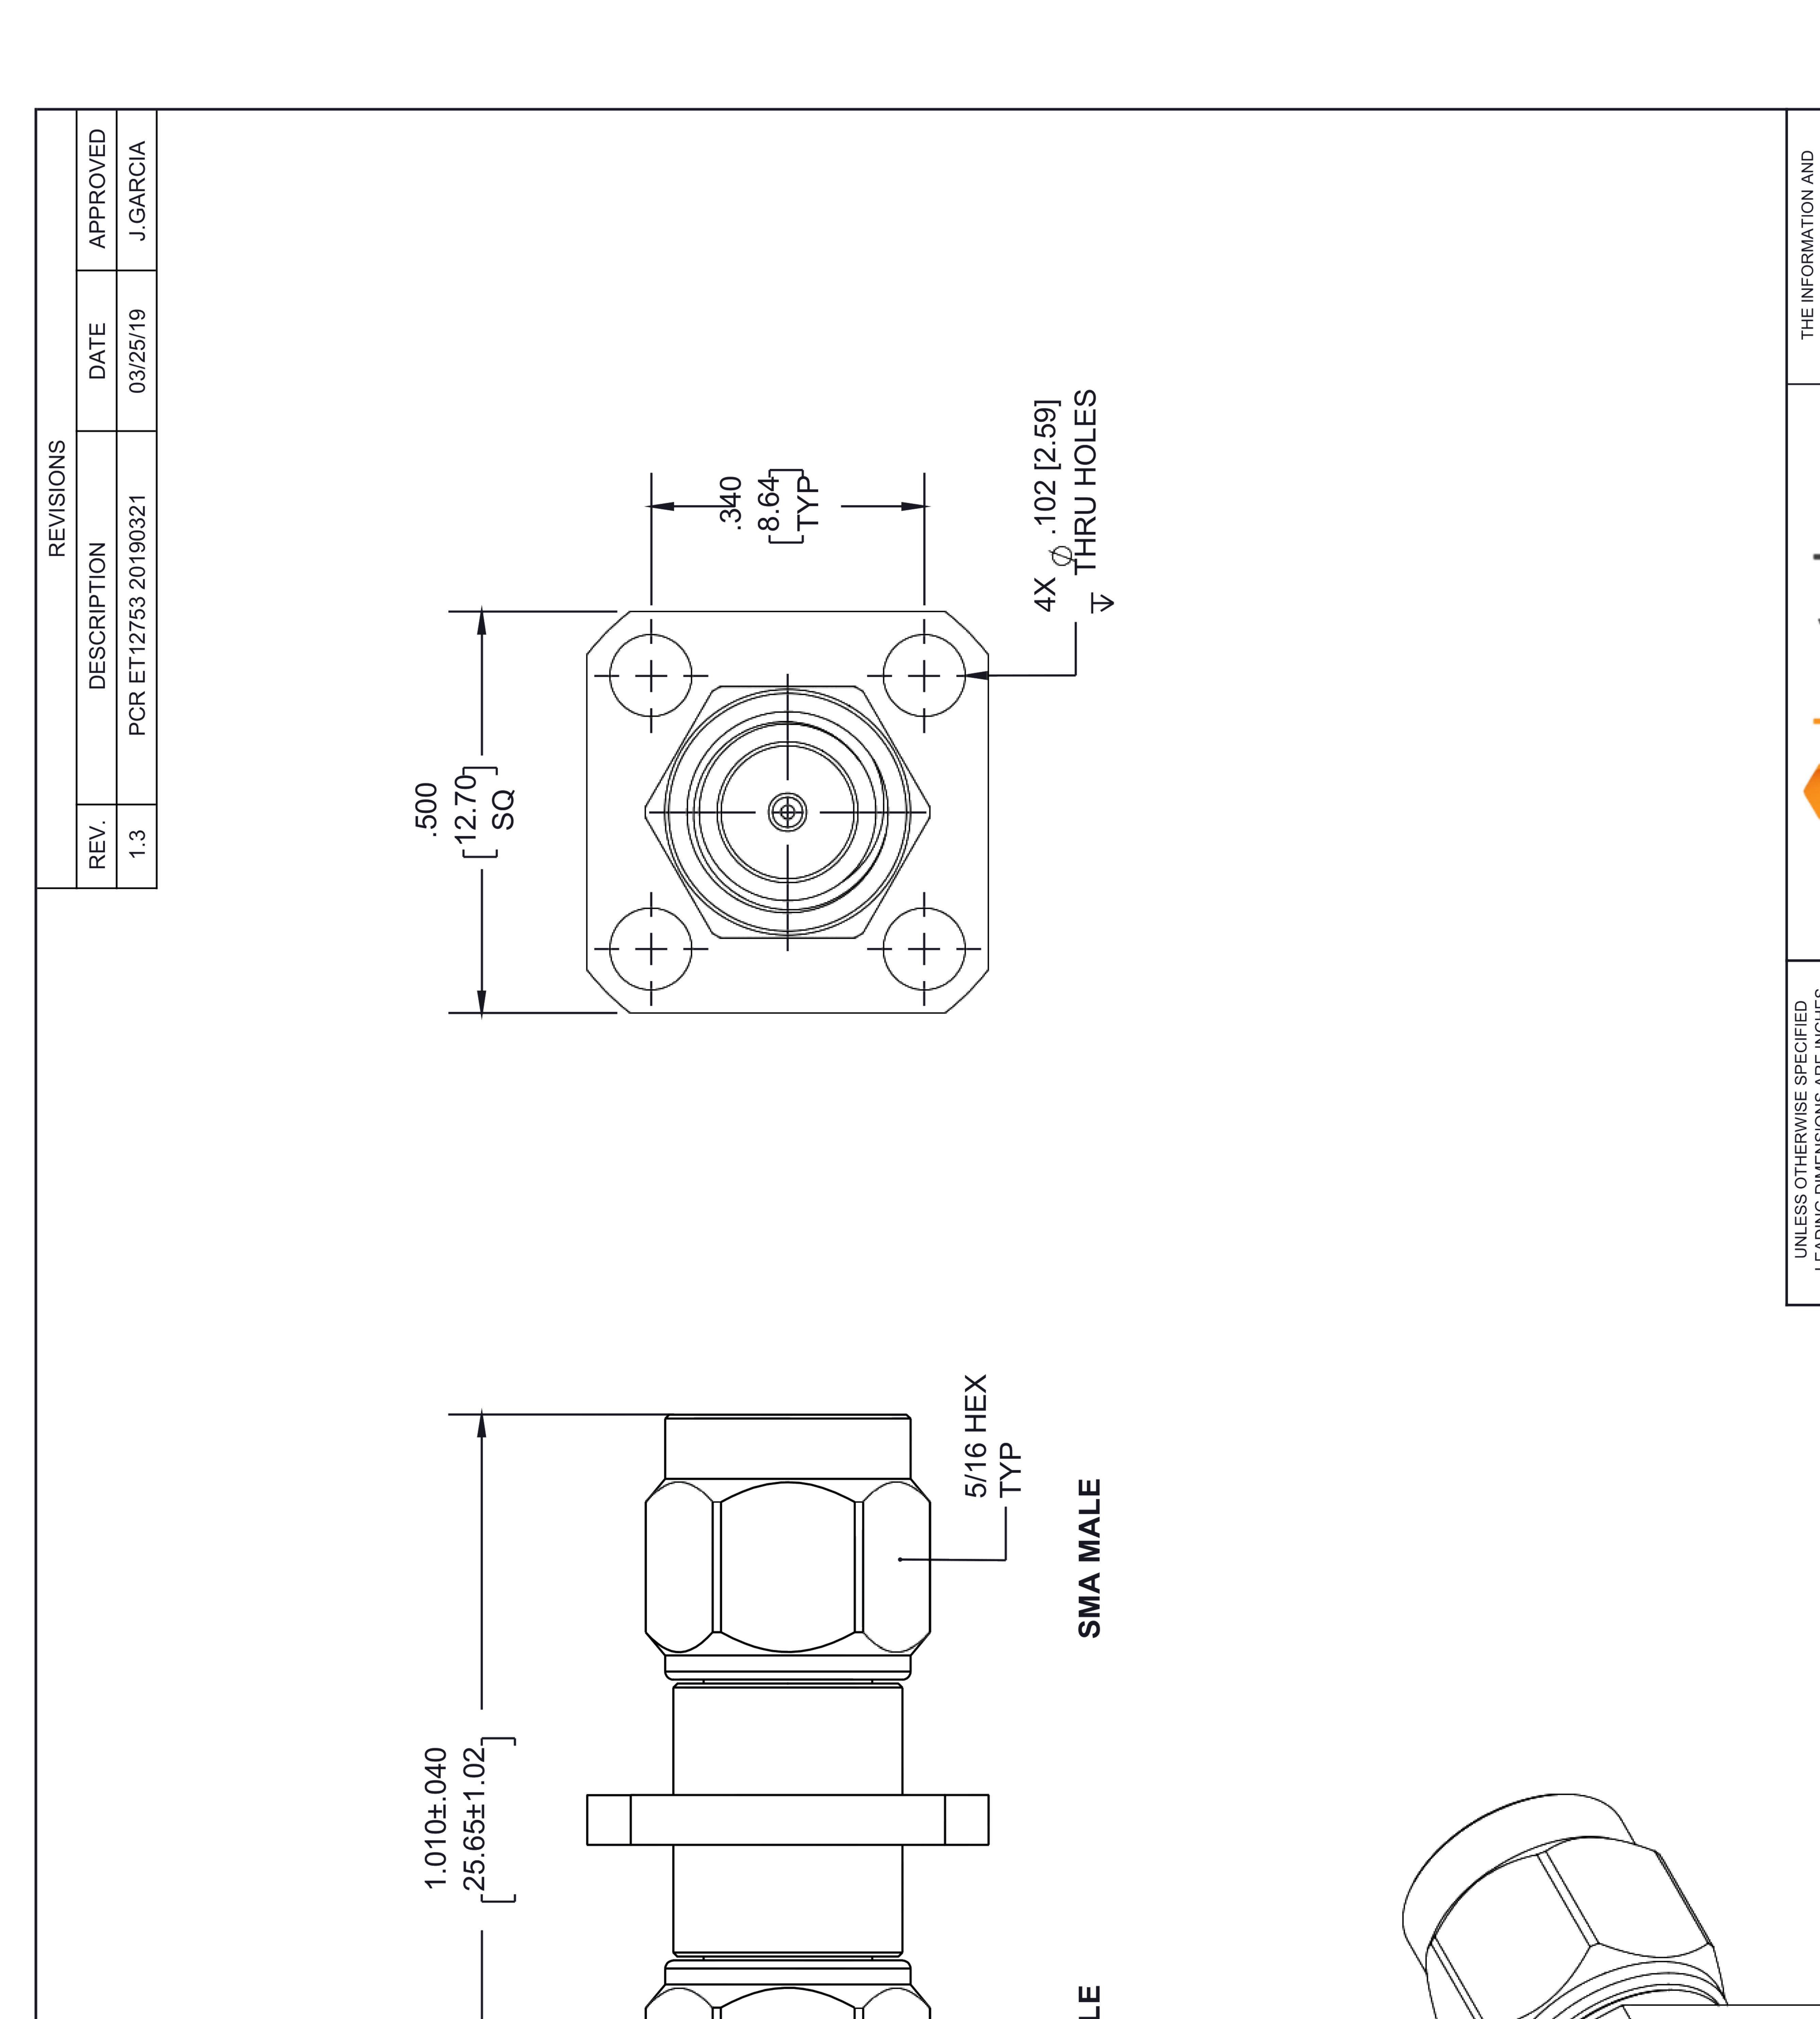

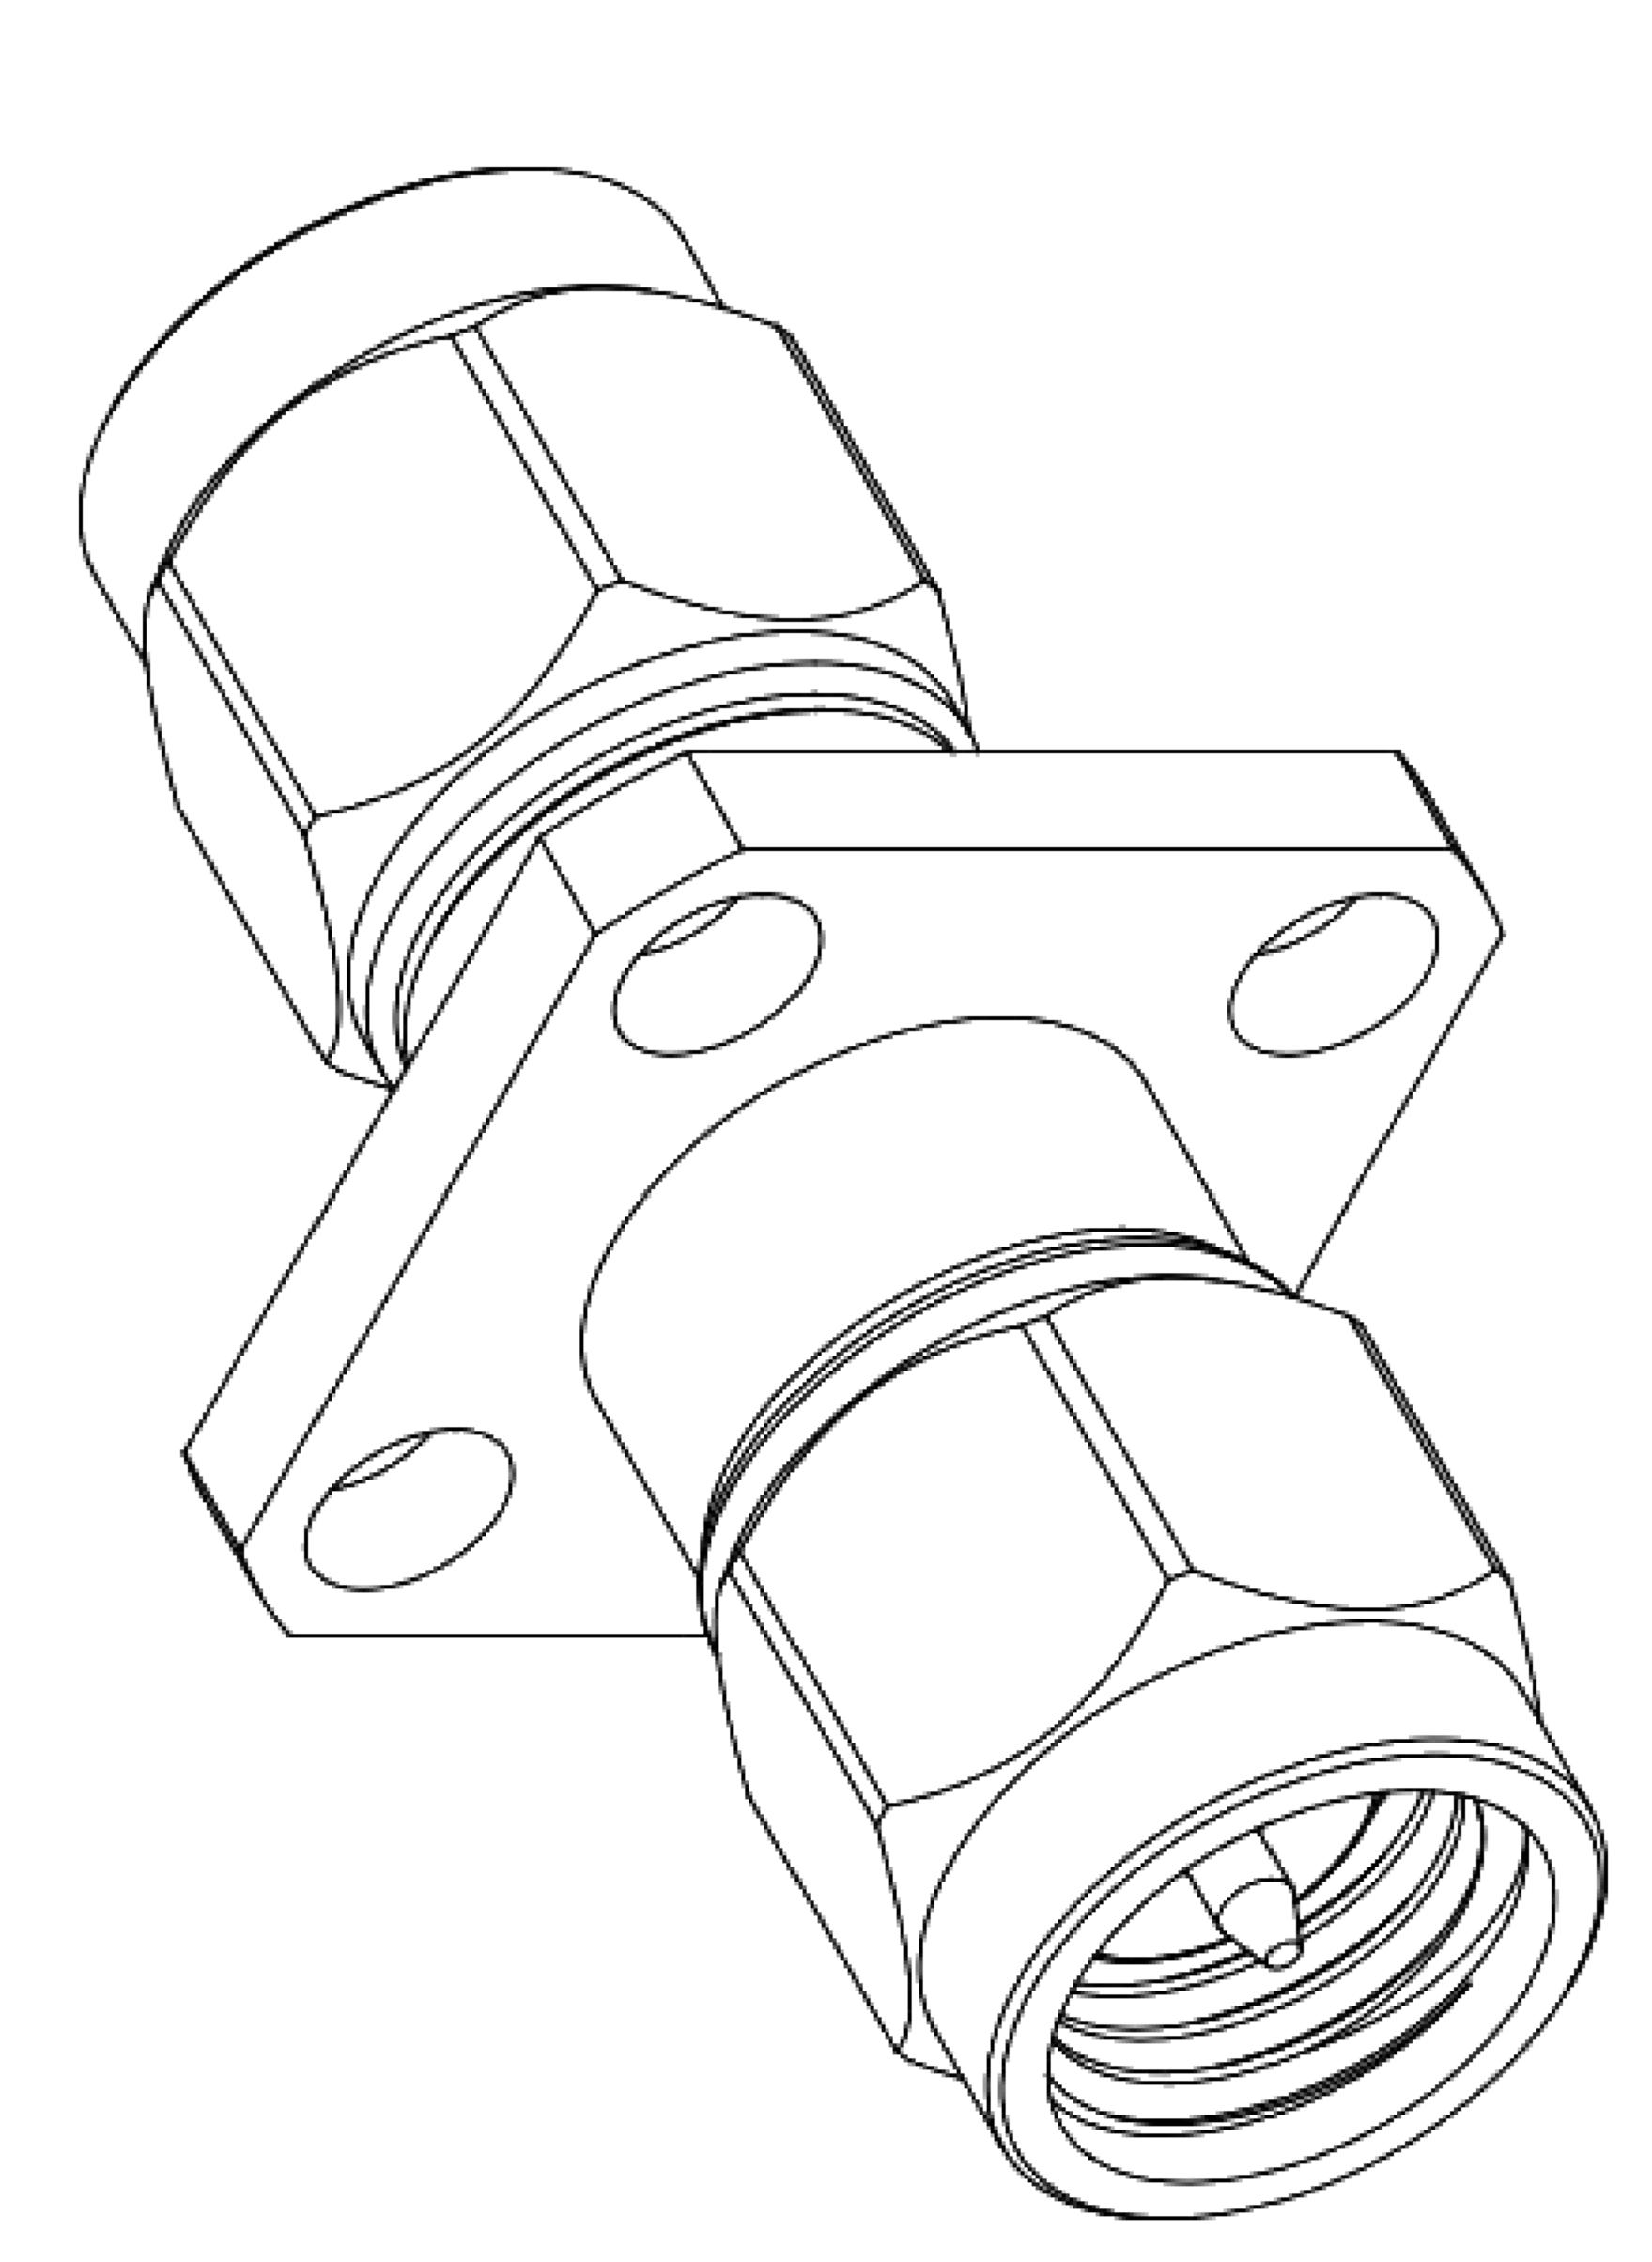

COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPOI ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.