


Ruggedized 2.4mm NMD Female to SMA Female Adapter

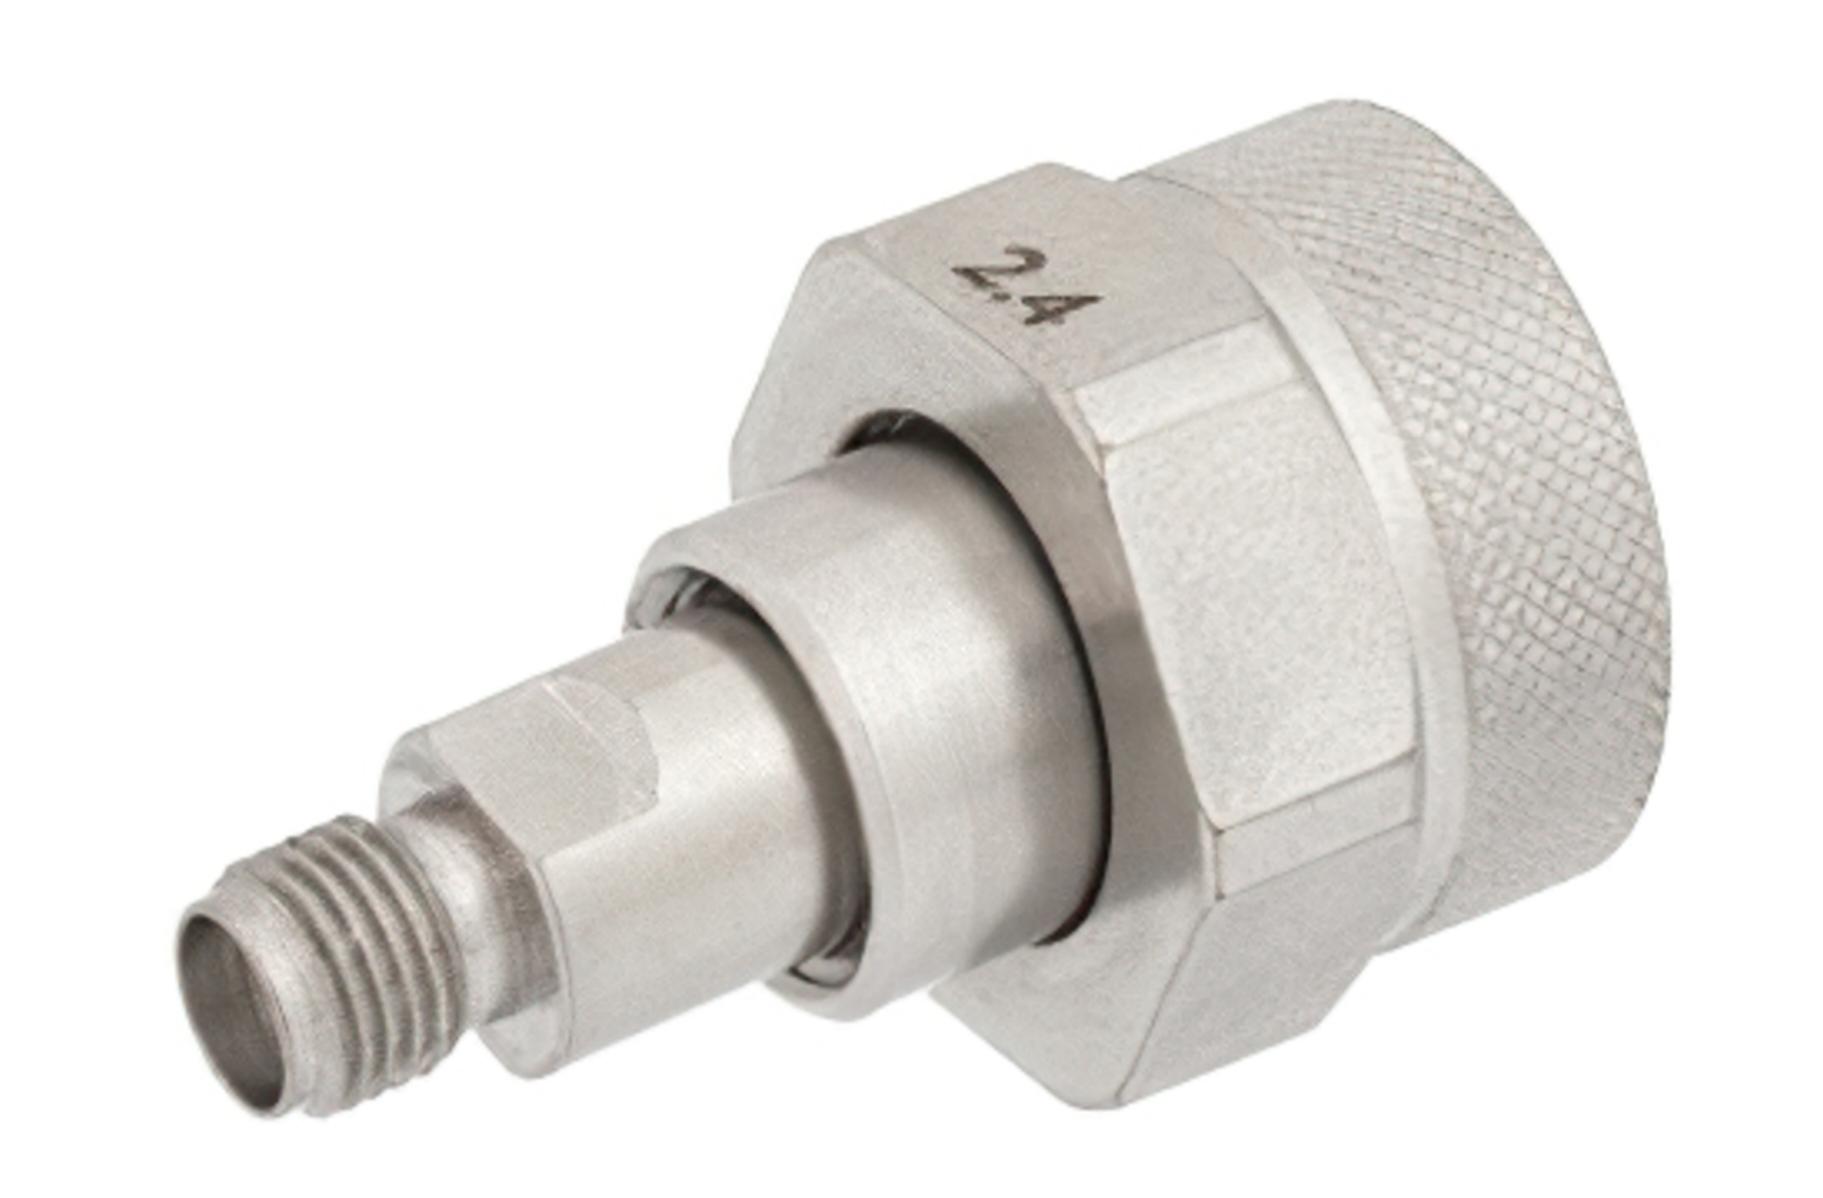

RF Adapters Technical Data Sheet

ET12766

Configuration

- 2.4mm NMD Female Connector 1
- SMA Female Connector 2
- 50 Ohm

- Ruggedized Design
- Straight Body Geometry

Features

- Max VSWR of 1.2:1 up to 27 GHz
- 4 µin minimum contact plating

Gold Plated Beryllium Copper Contact

Applications

- Allows Connection Between Series
- General Purpose Test

Description

Ebeestock's ET12766 ruggedized 2.4mm NMD female to SMA female adapter is part of our full line of RF components available for same-day shipping. Our 2.4mm NMD to SMA adapter has a female to female gender configuration in a ruggedized design. ET12766 2.4mm NMD female to SMA female adapter operates to 27 GHz. The Ebeestock RF adapter provides excellent VSWR of 1.2:1 maximum.

RF adapters are often used to enable connections between two connector types that would otherwise not mate. Certain adapter configurations can also be used to protect connectors on expensive equipment where the number of connect/disconnect cycles is high. An RF, microwave or millimeter wave adapter is connected to the equipment, and the commonly changed connection is made with the adapter which can be easily replaced when it wears out after high usage; such adapters are referred to as connector savers. Ebeestock also offers bulkhead, panel mount, hermetically sealed, reverse polarity, and isolated ground adapter varieties to serve all of your RF, microwave and millimeter wave needs.

Electrical Specifications

Minimum	Typical	Maximum	Units
DC		27	GHz
		1.2:1	
			DC 27

Electrical Specification Notes: Values at 25°C, sea level.

Mechanical Specifications

Size

 Length
 1.43 in [36.32 mm]

 Width
 0.74 in [18.8 mm]


 Weight
 0.068 lbs [30.84 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Ruggedized 2.4mm NMD Female to SMA Female Adapter ET12766

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



Ruggedized 2.4mm NMD Female to SMA Female Adapter

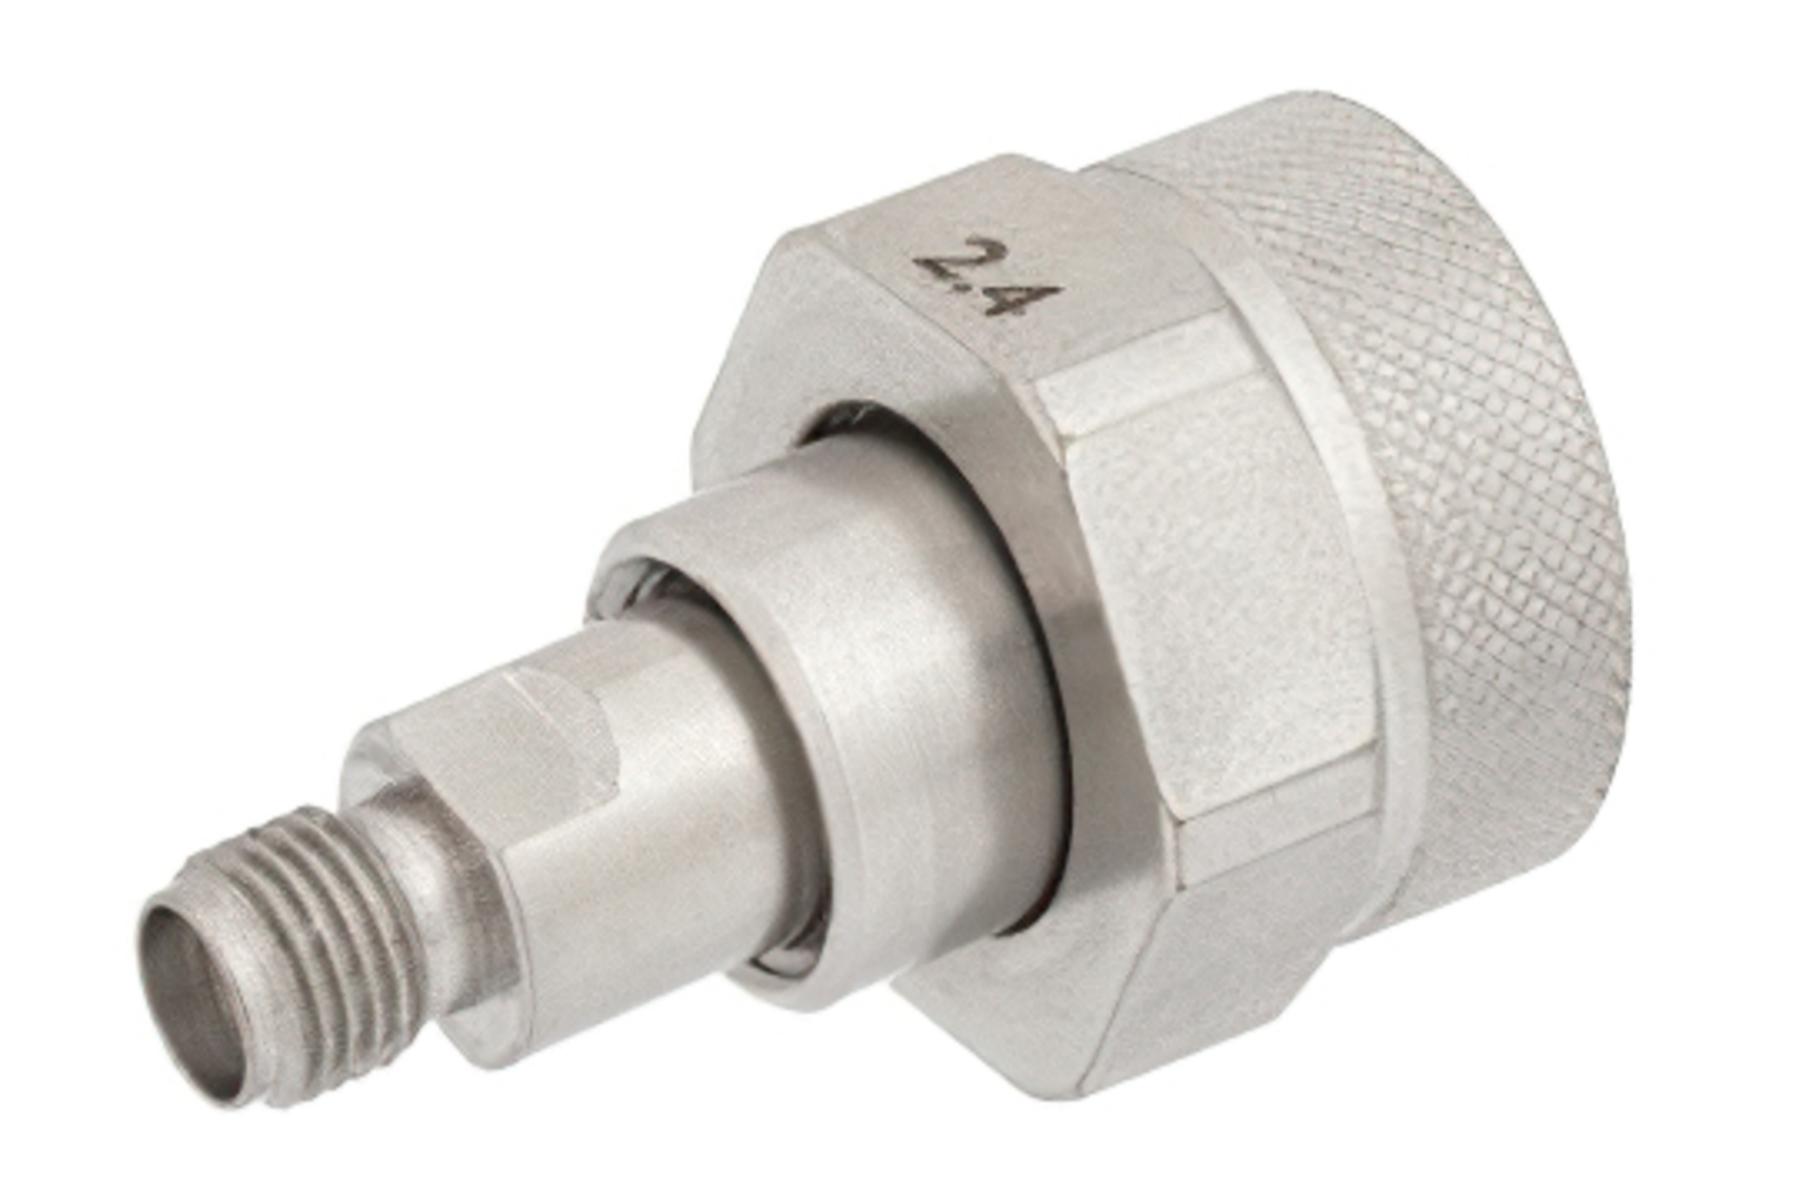

RF Adapters Technical Data Sheet

ET12766

Description	Connector 1	Connector 2	
Туре	2.4mm NMD Female	SMA Female	
Polarity	Standard	Standard	

Material Specifications

	Connector 1		Conne	ctor 2
Description	n Material	Plating	Material	Plating
Туре	2.4mm NMD Female		SMA Female	
Contact	Beryllium Copper	Gold	Beryllium Copper	Gold
		4 µin minimum		4 µin minimum
Insulation	PSU		PTFE	
Outer Conductor	Passivated Stainless Steel		Passivated Stainless Steel	
Coupling Nut	Passivated Stainless Steel			

Compliance Certifications (see product page for current document)

Ruggedized 2.4mm NMD Female to SMA Female Adapter from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: Ruggedized 2.4mm NMD Female to SMA Female Adapter ET12766

URL: https://www.ebeestock.com/ruggedized-2-4mm-nmd-female-to-sma-female-adapter-0012766

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

ET12766 CAD Drawing
Ruggedized 2.4mm NMD Female to SMA Female Adapter

