
4.1/9.5 Mini DIN Male to 4.1/9.5 Mini DIN Female Low PIM Cable 24 Inch Length Using TFT-402-LF Coax Using Times Microwave Components

	REVISIONS			
	REV.	DESCRIPTION	DATE	APPROVED
	Α	INITIAL RELEASE	04/08/2021	SELLIS
	Α	ADD PIM LABEL, UPDATE NOTES	8/3/2021	

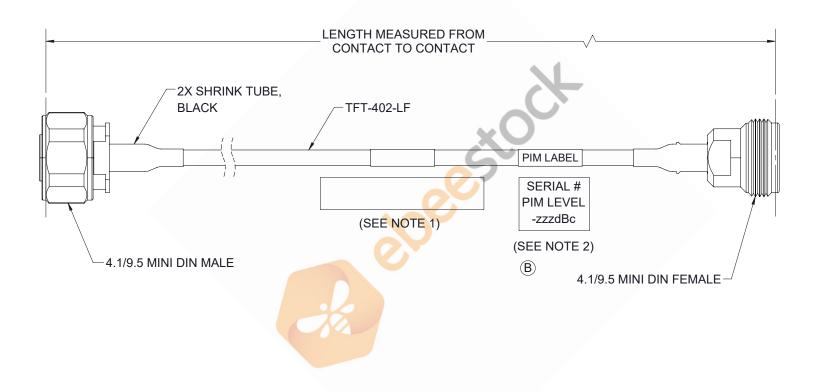

NOTES:

CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. 1. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12" FROM THE FRONT OF THE CONNECTOR.

2. PIM LABEL 6" FROM CABLE END 1 PLACE.

 $.X = \pm .2$ [5.08] $.XX = \pm .02$ [.51] ± 1/32 $.XXX = \pm .005[.13]$ ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 |20 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5%L / -0 ALL DIMENSIONS SHOWN

ARE FOR REFERENCE ONLY

UNLESS OTHERWISE SPECIFIED

LEADING DIMENSIONS ARE INCHES

DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

ebeestock

8TH FLOOR, BUILDING 1, YONGFU SCIENCE AND TECHNOLOGY CENTER INDUSTRIAL PARK, NANZHA DISTRICT 5, HUMEN, 523900, DONGGUAN, GUANGDONG, CHINA

> WEBSITE: www.ebeestock.com EMAIL: sales@ebeestock.com

THIRD-ANGLE PROJECTION THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF EBEESTOCK CORPORATION

ALL RIGHTS RESERVED. SHEET SCALE N/A

SIZE CAGE CODE DRAWN BY 53919

DMAY

ITEM NO. ET14194

REV

В

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.