

N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 2 00 cm Length Using ET38354 Coax



# RF Cable Assemblies Technical Data Sheet

ET28568


# Configuration

Connector 1: N Female Bulkhead
 Connector 2: N Female Bulkhead

Cable Type: ET38354

#### Features

- 83% Velocity of Propagation
- Shielding effectiveness > 95 dB
- Maximum VSWR is < 1.35:1 to 18 GHz
- Minimum Bend Radius of 1.5 inches
- Operating Temperature range of -55 to +125 °C
- ROHS and REACH Compliant
- Same day shipment of custom lengths
- 100% Continuity and RF tested

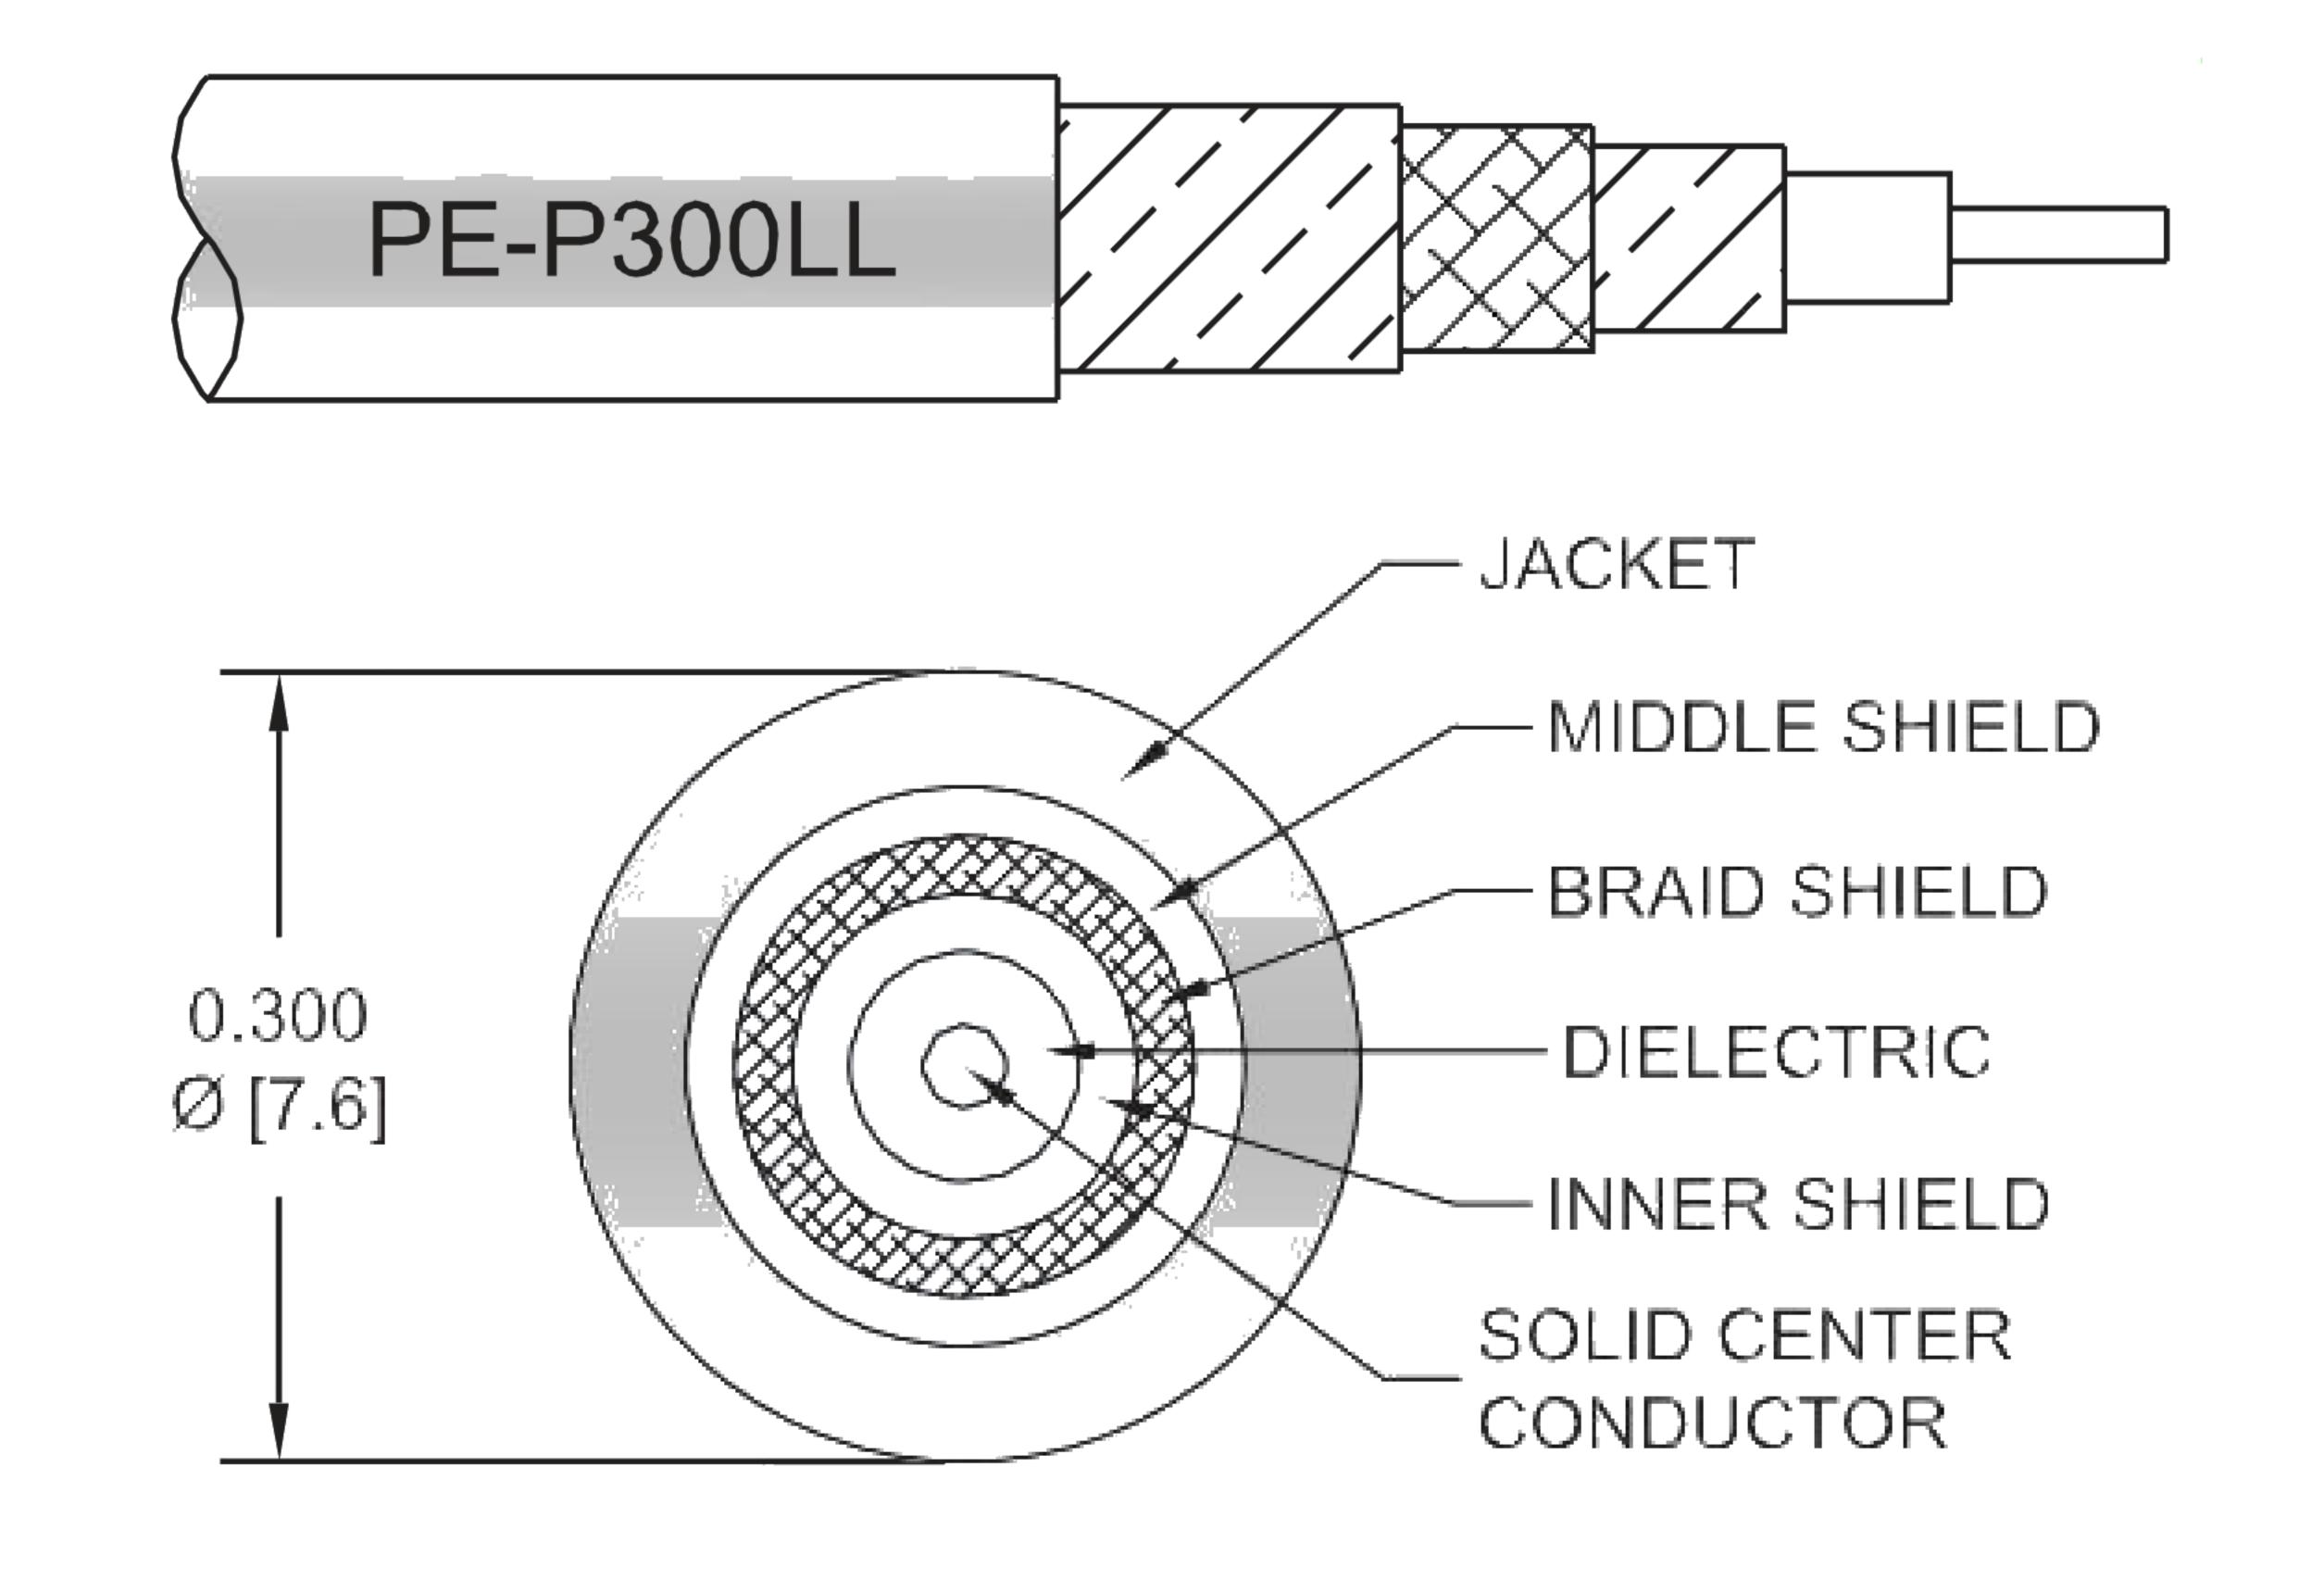

#### Description

The ET3C3232 high performance test cable's 0.3 inch diameter and 83% phase velocity offer very low loss performance up to 18 GHz. The durable stainless steel connectors and FEP jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. The series is offered with Type N, TNC, and SMA connectors all rated to 18 GHz. A heavy Duty boot provides improved strain relief and adds to the durability of the cable assemblies. These cable assemblies are built using a double shielded flexible cable, providing excellent shielding effectiveness of greater than 95 dB. All ET3C3232 cable assemblies are 100% Continuity and RF tested to published specifications. Custom lengths are built to order and shipped same day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.35:1	
Velocity of Propagation		83		%
RF Shielding	95			dB
Capacitance		25 [82.02]		pF/ft [pF/m]

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.6	0.72	0.98	1.37	1.9	dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 200 cm Length Using ET-P300LL Coax, RoHS ET28568

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.



N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 2 00 cm Length Using ET38354 Coax



## RF Cable Assemblies Technical Data Sheet

#### ET28568

Insertion Loss (Typ.)	0.53	0.66	0.85	1.18	1.63	dB
Power Handling (Max.)	1,800	1,200	900	650	400	Watts

# Mechanical Specifications

Cable Assembly

Length\* 78.74 in [200 cm]

Diameter 0.875 in [22.23 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Solid

Inner Conductor Material and Plating Copper, Silver

Dielectric Type
Number of Shields
3

Shield Layer 1
Shield Layer 2
Shield Layer 3
Silver Plated Copper Tape
Aluminum Polyester
Silver Plated Copper Wire

Jacket Material

Jacket Diameter

0.3 in [7.62 mm]

Repeated Minimum Bend Radius 1.5 in [38.1 mm]

#### Connectors

Description	Connector 1	Connector 2
Type	N Female Bulkhead	N Female Bulkhead
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	50 μin minimum	50 μin minimum
Dielectric Type	PEI	PEI
Outer Conductor Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Outer Conductor Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Body Material and Plating	Passivated Stainless Steel Passivated Stainless St	
Body Plating Specification	SAE-AMS-2700 SAE-AMS-2700	

Mechanical Specification Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 200 cm Length Using ET-P300LL Coax, RoHS ET28568

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

<sup>\*</sup>All cable assemblies have a length tolerance of 1.5% or ± 3/8", whichever is greater.



N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 2 00 cm Length Using ET38354 Coax



# RF Cable Assemblies Technical Data Sheet

ET28568

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

How to Order

Example: ET3C3232-12 = 12 inches long cable

ET3C3232-100cm = 100 cm long cable

N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 200 cm Length Using ET38354 Coax, RoHS from Ebeestock Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 200 cm Length Using ET-P300LL Coax, RoHS ET28568

**URL:** https://www.ebeestock.com/n-female-bulkhead-to-n-female-bulkhead-low-loss-test-cable-12-in ch-length-using-pe-p300ll-coax-0028560

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Ebeestock reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Ebeestock does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Ebeestock does not assume any liability arising out of the use of any part or documentation.

8th Floor, Building 1, Yongfu Science and Technology Center Industrial Park, Nanzha District 5, Humen,523900, Dongguan, Guangdong, China.

# ET28568 CAD Drawing

N Female Bulkhead to N Female Bulkhead Low Loss Test Cable 200 cm Length Using ET38354 Coax, RoHS

